



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

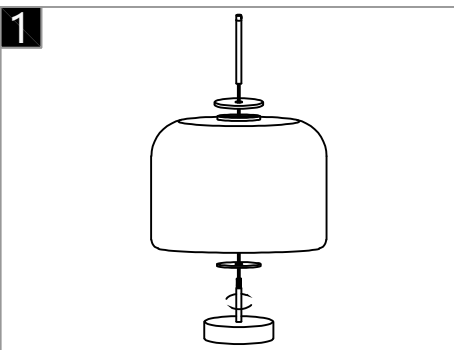


Install the lampshade step by step, and then connect the lamp body connecting rods together.

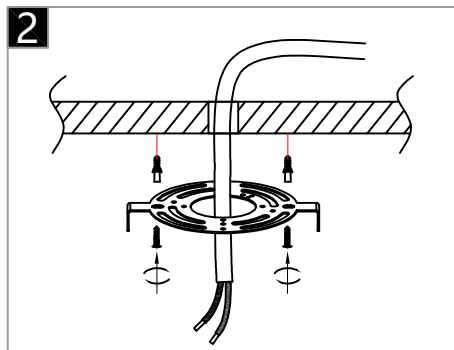


Fix the mounting plate to the ceiling using self-tapping screws.

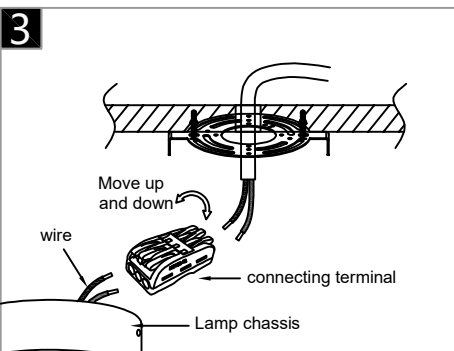

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

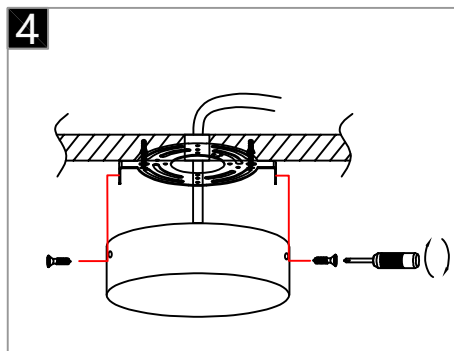


Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

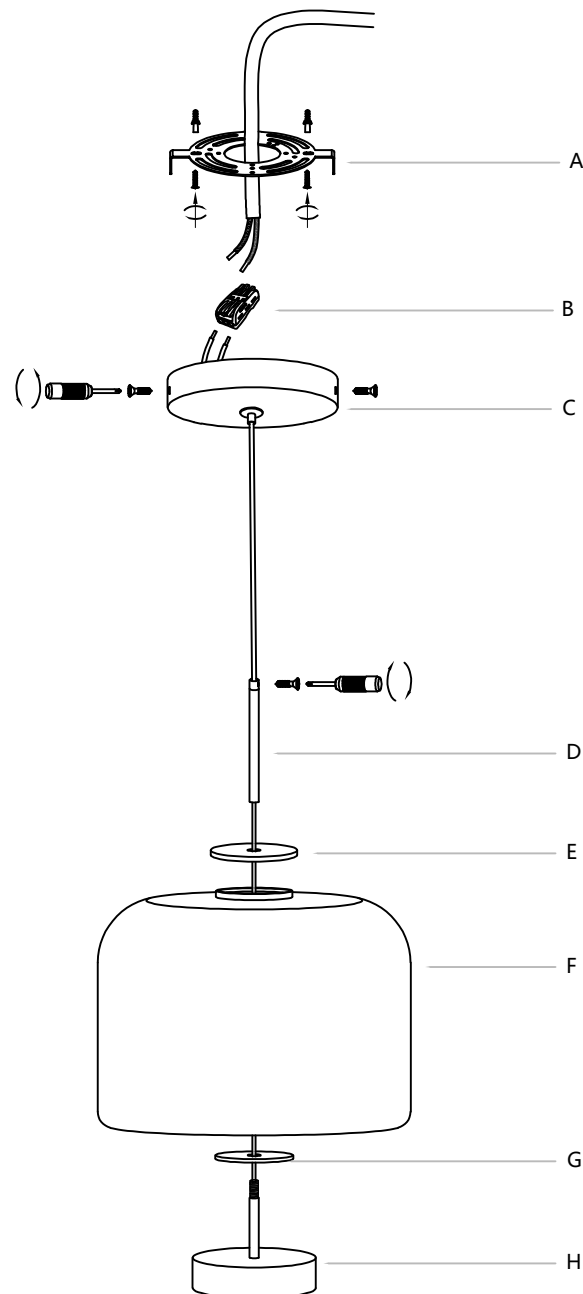

Pass the wires on the lamp head box (H) through the gasket (G), the lamp shade (F), the glass cover (E), and the connecting rod (D), then insert it into the top cover (C). Next, install the lamp head box (H) onto the lamp shade (F), and then fix the entire assembly onto the connecting rod (D). It is best to use a screwdriver to secure the wires inside above the connecting rod (D). Then, Fix the mounting plate (A) to the ceiling. Next, connect the wires reserved for the top cover (C) to the wires on the ceiling, and then connect them to the terminal block (B). Then, align the holes on the top cover (C) with the holes on the mounting plate (A), and tighten the screws.

Remote Control Instruction Manual

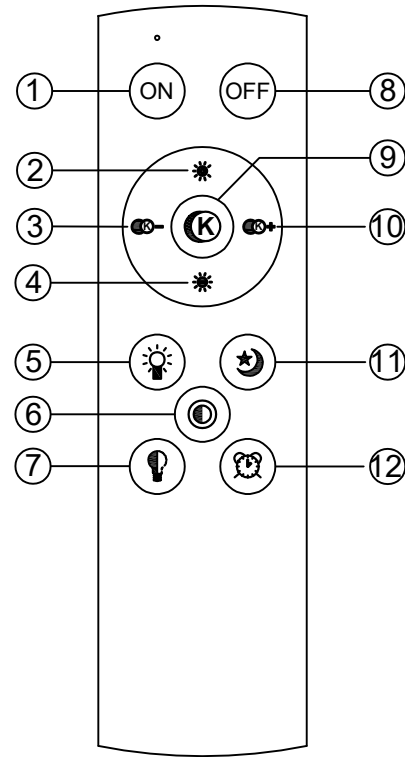

Basic Operation Instructions:

1. Calibration: The remote control needs to be calibrated with the driver before it can be used.

[Method: Connect the driver to the load lamp (light source) and the power supply normally. After the connection is completed, turn on the power. At the moment of power-on (within 3 seconds after the light source lights up), press the (ON) button for a long time. If you see the lamp (light source) "slowly flash three times", it indicates that the calibration operation and grouping are successful.]

2. Reset Calibration: Disconnect the connection between the remote control and the driver. The remote control will be ineffective for this lamp (light source).

[Method: Select the lamp (light source) that needs to be reset, cut off the power supply, then reconnect the power supply. At the moment of power-on (within 3 seconds after the light source lights up), press the (ON) button 5 times consecutively. If you see the light source "fast flash six times", it indicates that the reset calibration is successful.]

3. Timed Lighting: The duration for which the lights can remain on can be set.

[Method: Pressing the first button once causes the light to flash once, indicating a 30-minute timer.

Pressing the second button causes the light to flash twice, indicating a 60-minute timer.

Pressing the (ON) button cancels the timer.]

① Match, clear, turn on the light

② Luminance +

③ Color temperature -

④ Luminance -

⑤ Auxiliary lighting

⑥ Three-tone lighting

⑦ Full Bright / Half Bright Button

⑧ Turn off the lights

⑨ Long press to slowly adjust the color temperature

⑩ Luminance -

⑪ Night lamp

⑫ Timed lighting