



**Warning:**  
This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

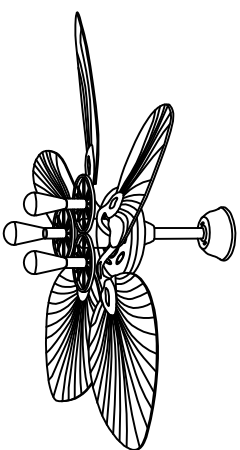


### Steps of installation

**1**

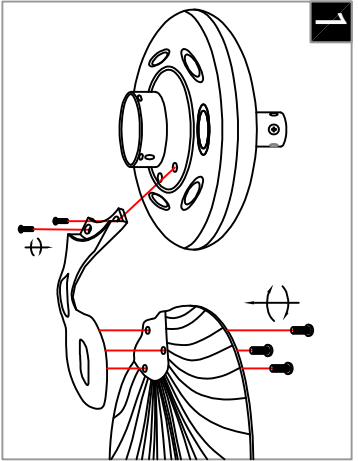


Align the fan blade bracket with the hole at the bottom of the lamp body, tighten the screws, and then install the fan blade onto the fan blade bracket.

**2**

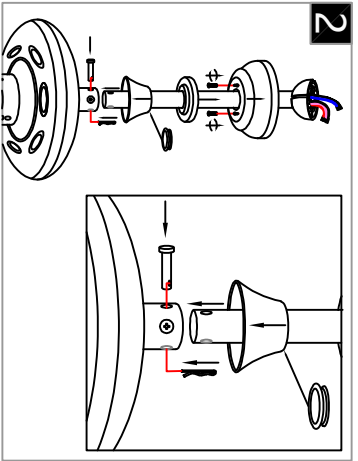


Insert the rubber ring into the hole of the speaker cover, then pass the round tube through the top cover, the convex cover, the speaker cover, and the cylindrical part of the lamp body, align the hole positions, insert the lock pin, then insert the pin into the lock pin, tighten the screws, and then press down the speaker cover and cover it in place.

**3**

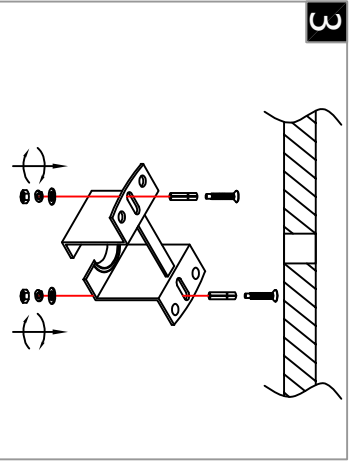


Fix the installation bracket to the ceiling.

Product style diagram

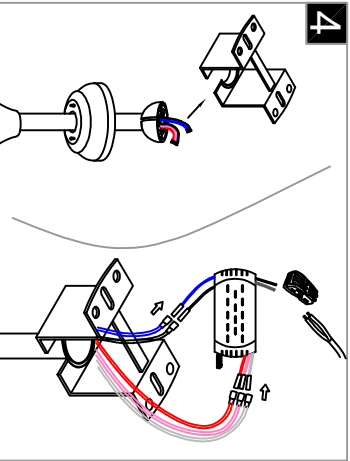


Insert the round tube into the installation bracket, (aligning the concave and convex positions), then connect the wires of the power driver and the wires coming out of the round tube, and connect the wires of the power driver and the wires on the ceiling using the terminal.

**5**

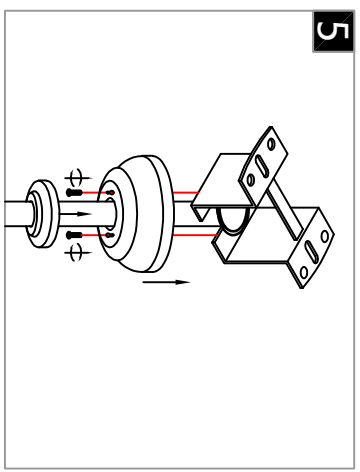


Align the hole positions of the top cover with the hole positions at the bottom of the mounting bracket, tighten the screws, and then move the convex cover upward to cover the screws.

**6**

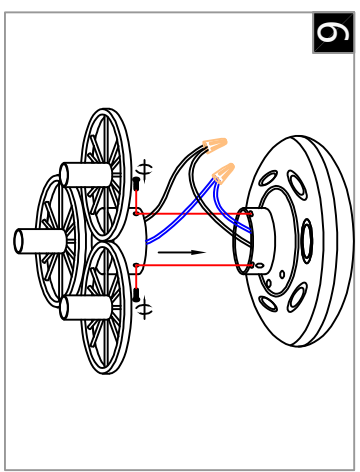

Use the quick connector cap to connect the wire at the bottom of the lamp body to the wire of the lamp head frame, and then align the holes of the round cover of the lamp head frame with the holes of the lamp body, tighten the screws.

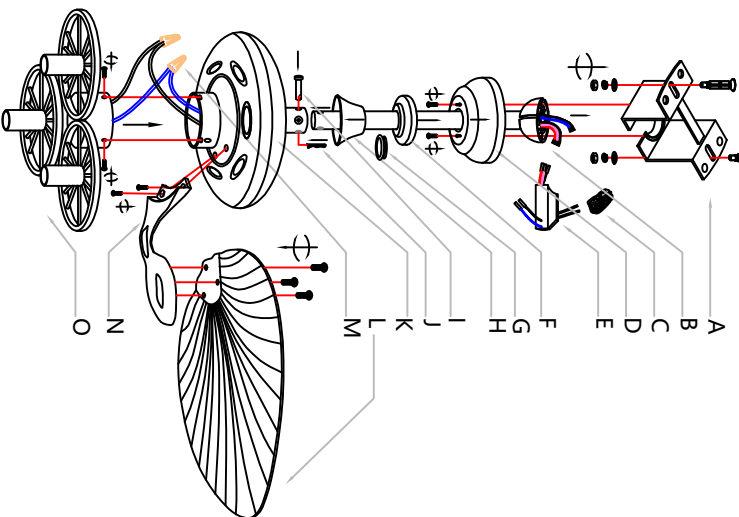

First, align the fan blade bracket (N) with the hole at the bottom of the lamp body (K), tighten the screws, and then install the fan blade (L) onto the fan blade bracket (N). Next, insert the rubber ring (G) into the hole of the speaker cover (H), then pass the round tube (B) through the top cover (D), the convex cover (F), the speaker cover (H), and the cylindrical part of the lamp body (K), align the hole positions, insert the lock pin (I), then insert the pin (J) into the lock pin (I), tighten the screws, and then press down the speaker cover (H) and cover it in place.

Subsequently, fix the mounting bracket (A) to the ceiling. Then, insert the larger end of the round tube (B) into the mounting bracket (A) (make sure the concave and convex positions are aligned), then connect the wire of the power driver (E) to the wire led out from the round tube (B), and connect the wire of the power driver (E) to the wire on the ceiling through the terminal (C). Finally, align the hole positions of the top cover (D) with the hole positions at the bottom of the mounting bracket (A), tighten the screws, and then move the convex cover (F) upward to cover the screws. Then, use the quick connector cap (M) to connect the wire at the bottom of the lamp body (K) to the wire of the lamp head frame (O), and then align the holes of the round cover of the lamp head frame (O) with the holes of the lamp body (K), tighten the screws.

**① ALLOFF**                      **⑥ LIGHT ON/OFF**

**② FAN Speed control gears 1-6**                      **⑦ FAN/OFF**

**③ Natural Wind Mode**                      **⑧ Reverse**

**④ Forward**                      **⑨ FAN 4-hour Timer**

**⑤ FAN 1-hour Timer**                      **⑩ FAN 2-hour Timer**