
Installation Instructions

WOMO lighting

Model number: WM5032


Warning:
This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications.
This product is suitable for indoor installation.

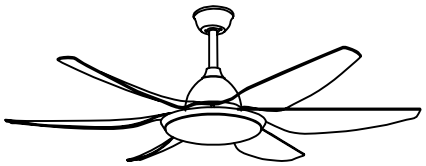

Product style diagram


Steps of installation

1

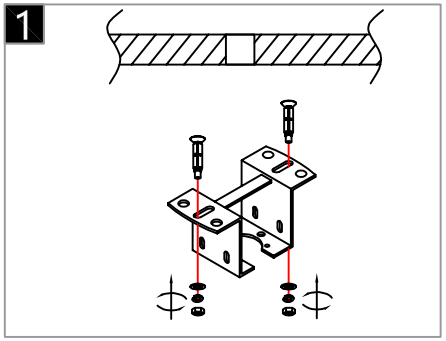


Fix the mounting bracket to the ceiling.

2

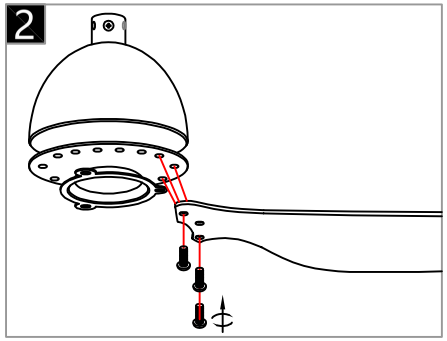


Align the fan blades with the screw holes on the bottom disc of the motor , and then tighten the screws.

3

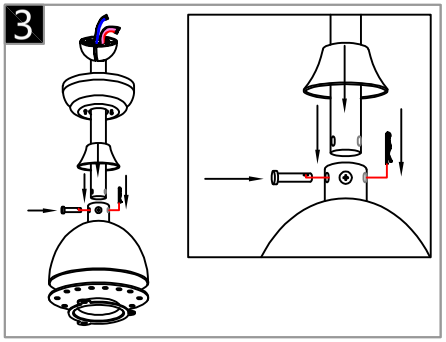


Pass the round tube through the top cover , flat base cover , conical cover , and the wires, insert it into the cylindrical part of the motor , align the holes, insert the lock pin , then insert the pin into the lock pin , tighten the screws, and then press down and cover the conical cover .

4

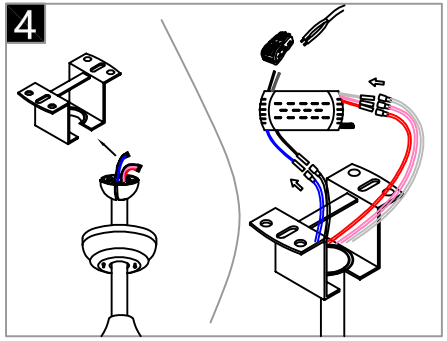


Insert the round tube into the installation bracket , (aligning the concave and convex positions), then connect the wires of the power driver and the wires coming out of the round tube , and connect the wires of the power driver and the wires on the ceiling using the terminal .

5

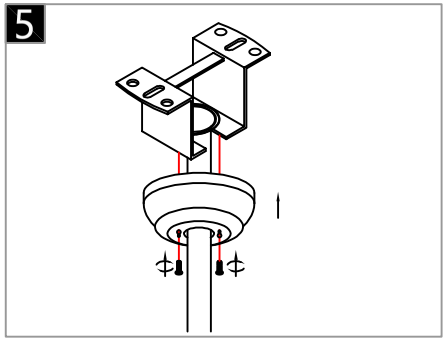


Align the holes of the top cover with the holes at the bottom of the installation bracket , and tighten the screws.

6

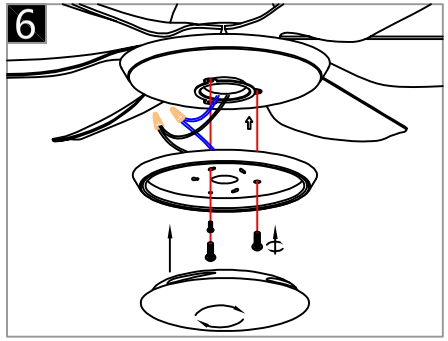

Align the holes of the disc with the screw holes in the inner concave part of the motor at the bottom, and tighten the screws. Use the quick connection cap to connect the wire of the light source driver to the wire at the bottom of the motor . Then, attach the light source driver and the magnetic light fixture to the disc . Finally, rotate and tighten the lampshade onto the disc .

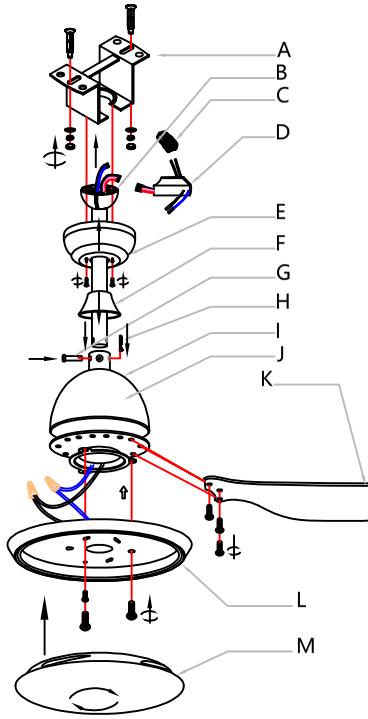

First, align the fan blades (**K**) with the screw holes on the bottom disc of the motor (**I**), and then tighten the screws.


Next, pass the round tube (B) through the top cover (**E**), the conical cover (**F**), and the wires, insert it into the cylindrical part at the top of the motor (**I**), align the holes, insert the lock pin (**G**), then insert the pin (**H**), tighten the screws, and press and cover the conical cover (**F**).

Then, fix the installation bracket (**A**) on the ceiling.

Next, insert the round tube (**B**) into the installation bracket (**A**) (make sure the concave and convex positions are aligned), connect the wires of the same color, connect the power driver (**D**) to the wire on the ceiling using a quick connector (**C**).

Then, align the holes of the top cover (**E**) with the holes at the bottom of the installation bracket (**A**), and tighten the screws.

Then, align the holes of the disc (**L**) with the screw holes in the inner concave part of the motor (**I**) at the bottom, and tighten the screws. Use the quick connection cap (**J**) to connect the wire of the light source driver to the wire at the bottom of the motor (**I**). Then, attach the light source driver and the magnetic light fixture to the disc (**L**). Finally, rotate and tighten the lampshade (**M**) onto the disc (**L**).



① ALLOFF
② FAN Speed control gears 1–6
③ Natural Wind Mode
④ Forward
⑤ FAN 1-hour Timer
⑥ LIGHT ON/OFF
⑦ FAN/OFF
⑧ Reverse
⑨ FAN 4-hour Timer
⑩ FAN 2-hour Timer