

Installation Instructions


WOMO®

Model number: WM5105


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.


Steps of installation

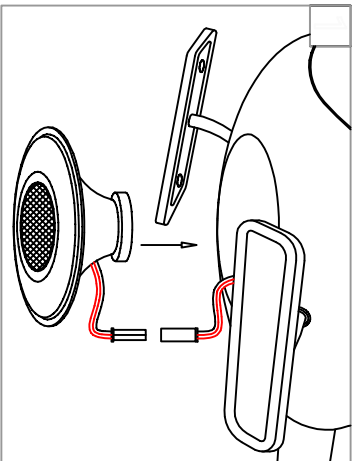


Connect the wires of the speaker (M) to those inside the lamp body . Then, insert the speaker into the lamp body .

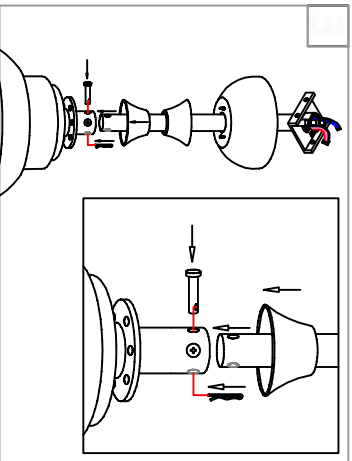


Pass the round tube through the top cover , the conical cover , and the wires. Insert the round tube into the motor , align the holes, insert the lock pin (I), then insert the pin into the lock pin , tighten the screws, and push down the conical cover to cover it in place.

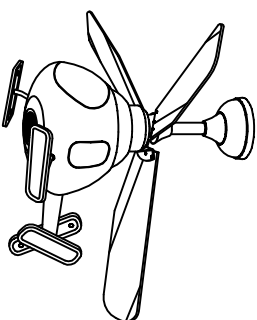


Product style diagram

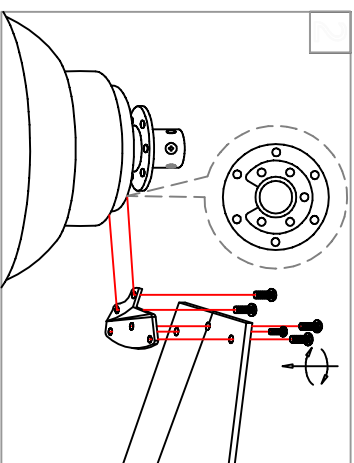


Install the fan blade bracket on the rotating shaft of the motor and attach the fan blades to the fan blade bracket .

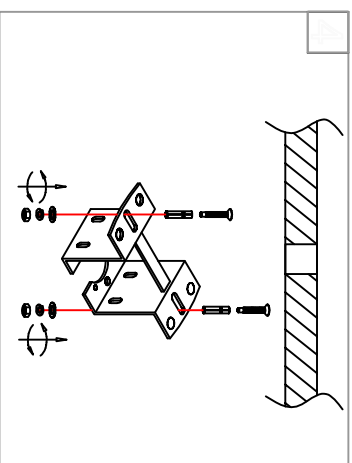


Fix the mounting bracket to the ceiling.

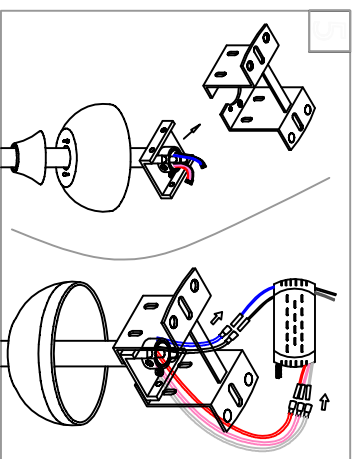


Insert the round tube into the installation bracket , connect the power supply wires to the wires of the round tube , and use the terminal to connect the power supply wires to the ceiling wires.

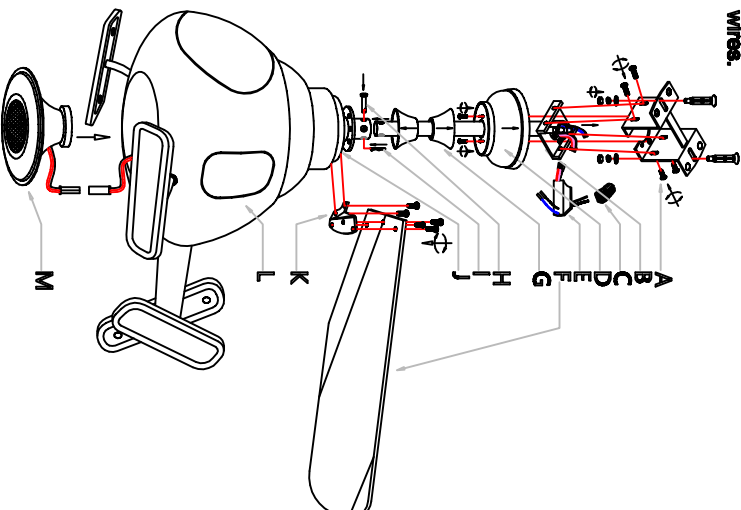

First, connect the wires of the speaker (M) to those inside the lamp body (L). Then, insert the speaker (M) into the lamp body (L). Next, install the fan blade bracket (K) on the rotating shaft of the motor (J) and attach the fan blades (F) to the fan blade bracket (K). Then, pass the round tube (B) through the top cover (D), the conical cover (E), and the wires. Insert the round tube (B) into the motor (J), align the holes, insert the lock pin (I), then insert the pin (J) into the lock pin (I), tighten the screws, and push down the conical cover (E) to cover it in place. Then, fix the mounting bracket (A) to the ceiling. Insert the round tube (B) into the installation bracket (A), connect the power supply (E) wires to the wires of the round tube (B), and use the terminal (C) to connect the power supply (E) wires to the ceiling wires. Align the holes on the side of the mounting bracket (A) with the holes on the round tube (B), then tighten the screws. Finally, align the holes on the top cover (D) with the holes at the bottom of the mounting bracket (A), and tighten the screws. Finally, push the conical cover (E) upwards to cover the screws.

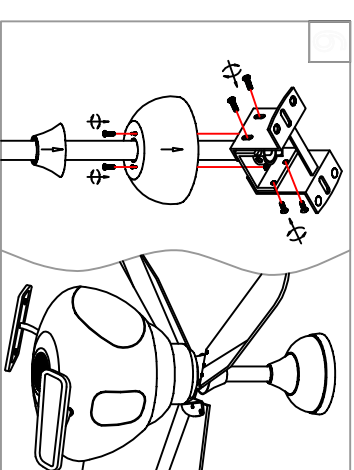

Align the holes on the side of the mounting bracket with the holes of the round tube , tighten the screws, and align the holes of the top cover with the bottom holes of the mounting bracket , then tighten the screws, and then push the horn cover upward to cover the screws.

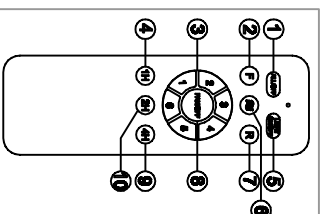

- ① ALLOFF
- ② Forward
- ③ FAN Speed control gears 1-6
- ④ FAN 1-hour Timer
- ⑤ LIGHT ON/OFF
- ⑥ Natural Wind Mode
- ⑦ Reverse
- ⑧ FAN/OFF
- ⑨ FAN 4-hour Timer
- ⑩ FAN 2-hour Timer