




Warning:
This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

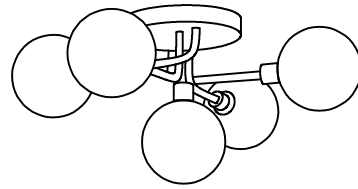


Product style diagram

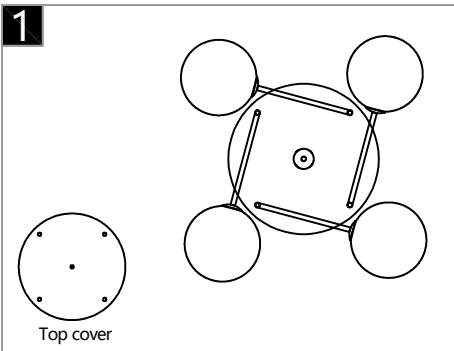


Install the lamp arm bracket onto the top cover, and then screw the glass cover onto the lamp head of the bracket.

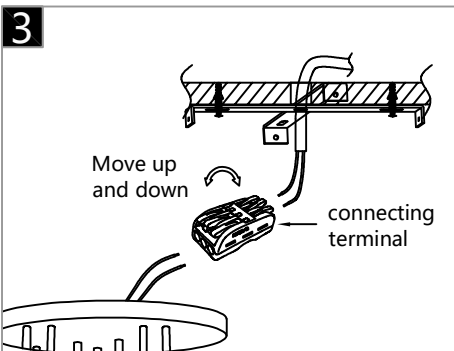


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

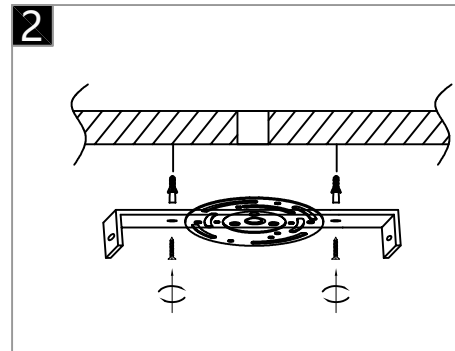

Fix the installation board to the ceiling using self-tapping screws.

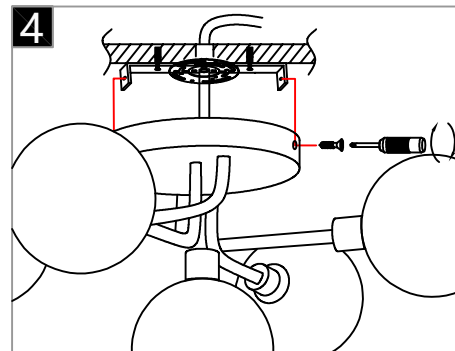

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

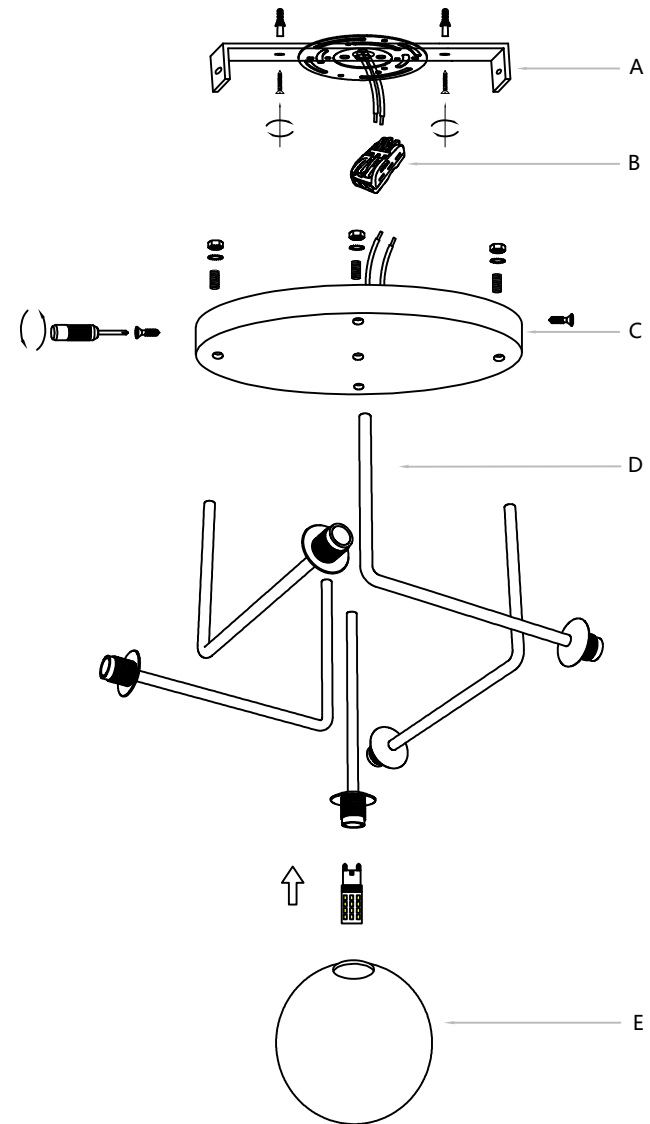


Install the lamp arm bracket (D) onto the top cover (C), and then screw the glass cover (E) onto the lamp head of the bracket. Fix the mounting plate (A) to the ceiling. Next, connect the wires reserved for the top cover (C) to the wires on the ceiling, and then connect them to the terminal block (B). Then, align the holes on the top cover (C) with the holes on the mounting plate (A), and tighten the screws.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.


Steps of installation

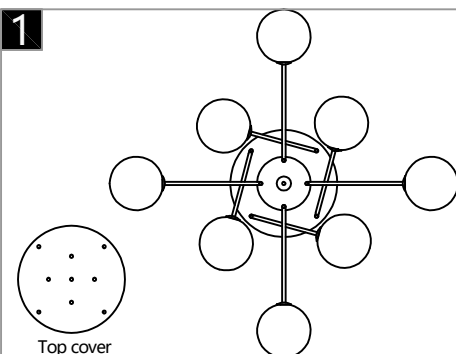


Place the top cover according to the view, and then install the elbow pipe support onto the top cover.

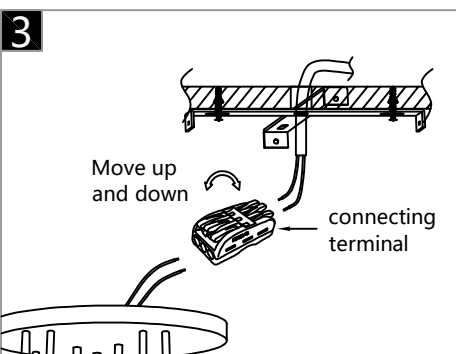


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

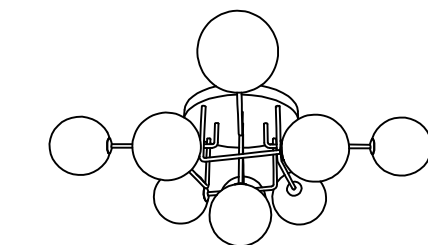



Product style diagram

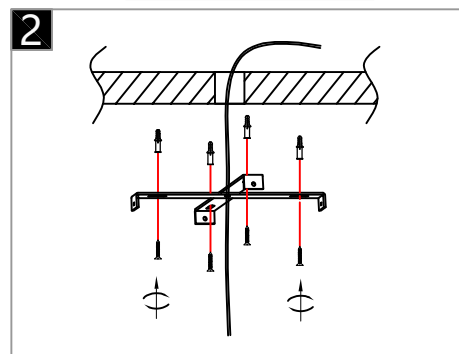

Attach the mounting plate to the ceiling with self-tapping screws.

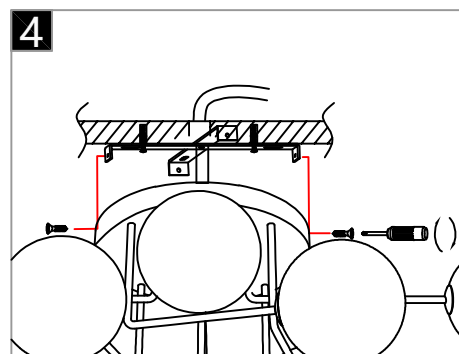

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

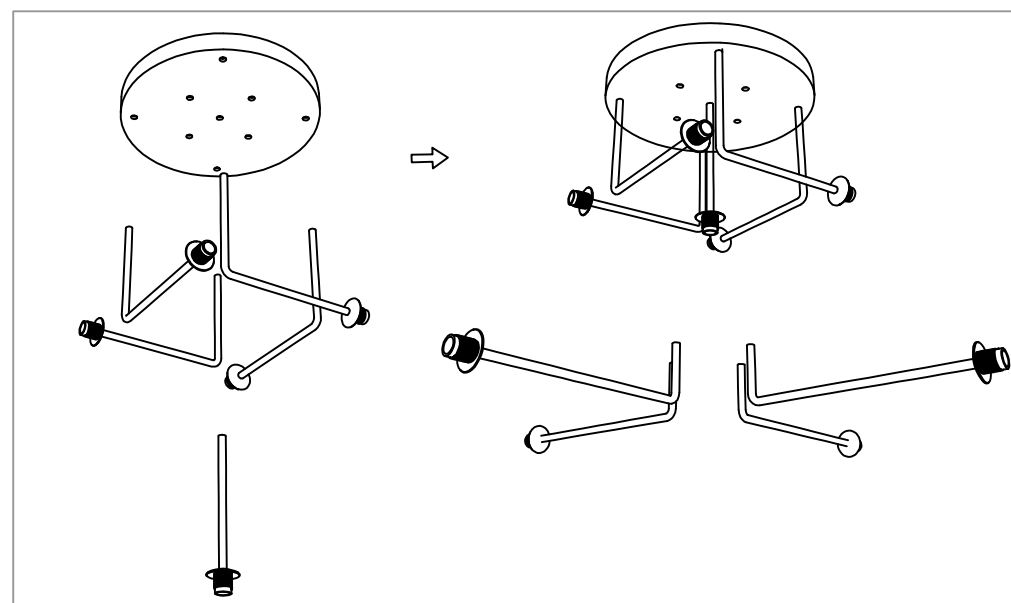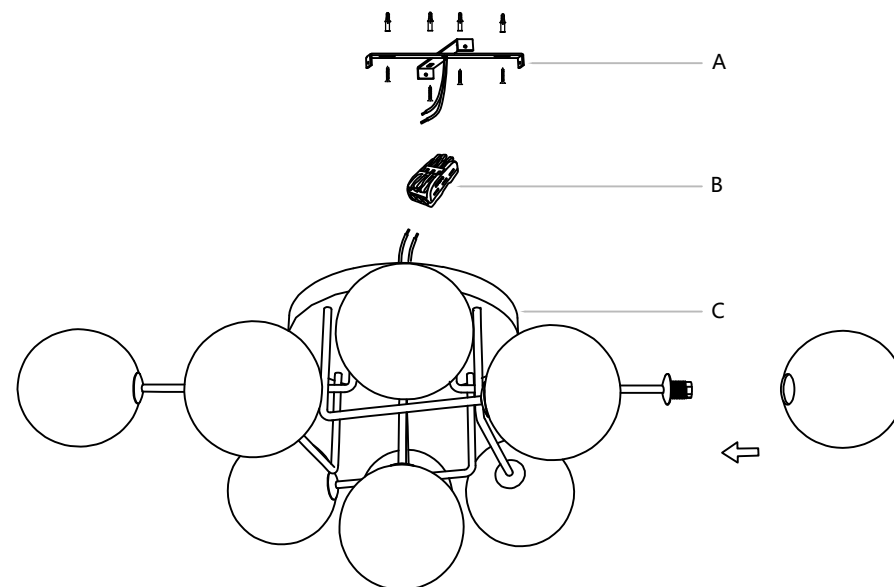

Place the top cover according to the design. Before installation, place all the wires on the bent pipes on the top cover and reserve them. Then, install the four short bent pipes at an angle of 75° onto the top cover. Next, install the four long bent pipes in a cross shape. Finally, install the straight pipe. Fix the mounting plate (A) to the ceiling, then connect the wires reserved for the top cover (C) and the wires on the ceiling to the terminal (B), then align the hole position on the side of the top cover (C) with the hole position on the mounting plate (A), then tighten the screws,