



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

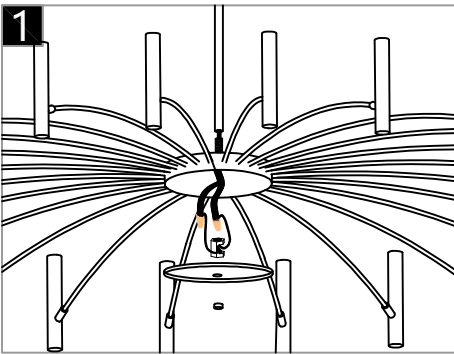


Install the lamp body bracket onto the lamp body base, then twist the wires according to the color onto the connection cap, then close the base cover, then install the connecting rods between the upper and lower lamp bodies, and finally fix them onto the top cover.

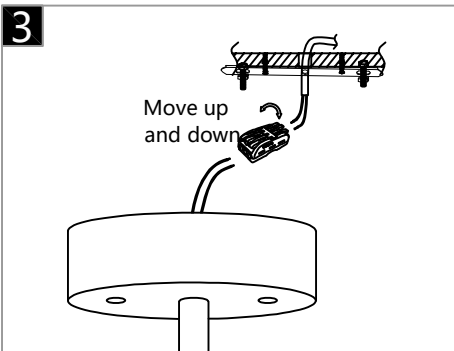


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

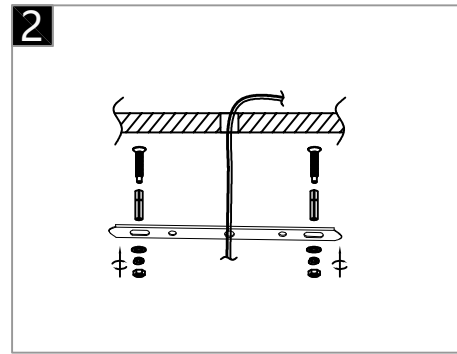

First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

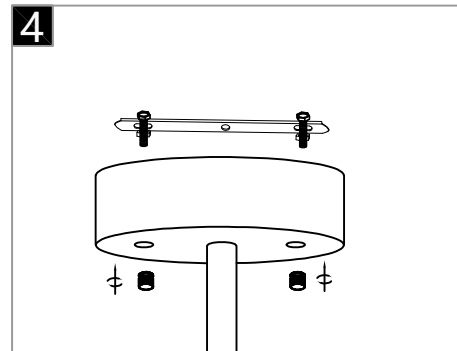


Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

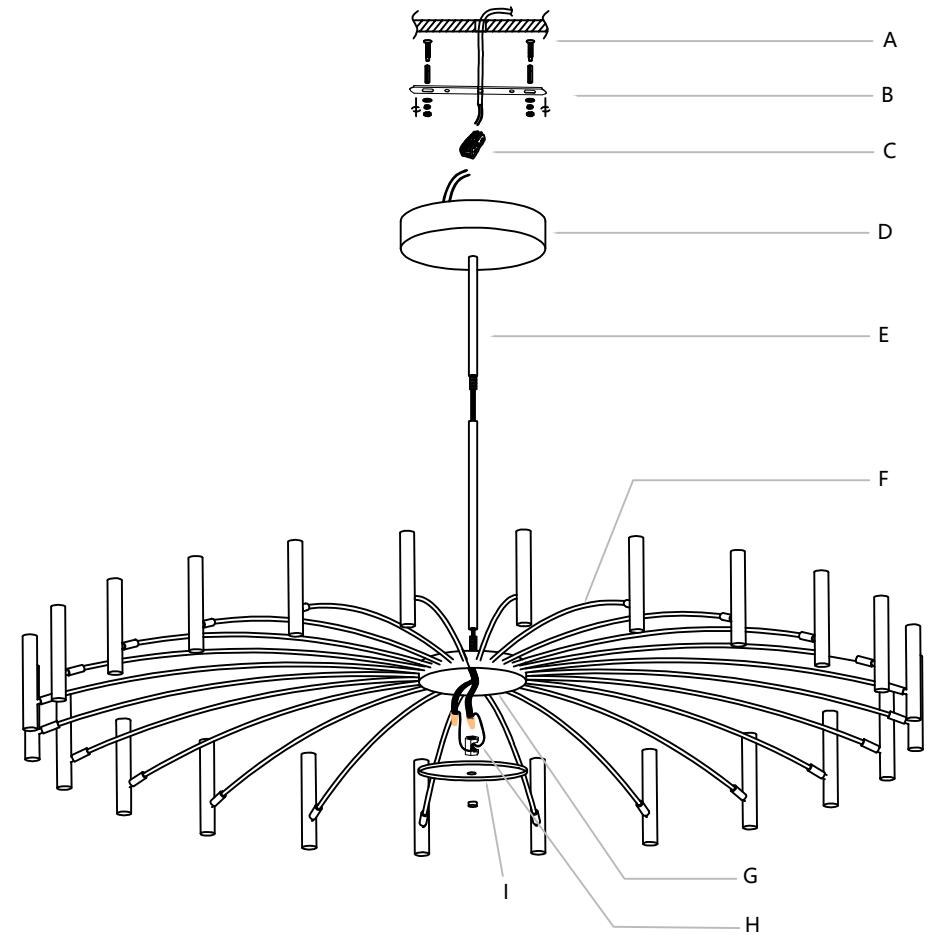


Install the lamp body bracket (F) onto the lamp body base (G), then twist the wires according to their colors onto the terminal caps, then connect the wires and pass them through the adapter nut (H), then through the upper and lower connecting rods of the lamp body (E), and finally place them onto the top cover (D). Then close the base cover (I), then install the upper and lower lamp body connecting rods (E), and finally fix them onto the top cover, Fix the screw (A) with an iron nail onto the ceiling, then fix the mounting plate (B) onto the ceiling, then connect the wires on the top cover (D) to the wiring terminals (C) on the ceiling, and finally fix the top cover (D) onto the mounting plate (B). Finally, use screws to install the jade lamp panel (E) onto the lamp body.

Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

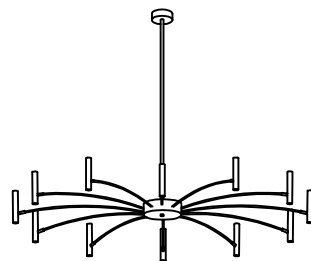


Product style diagram

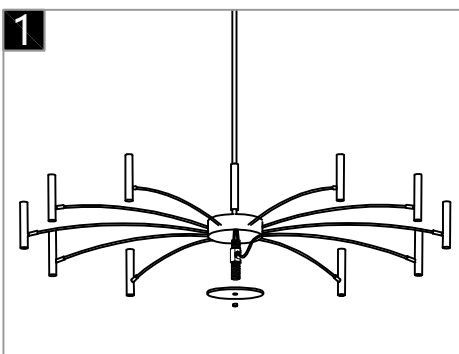


Install the lamp body bracket onto the lamp body base, then twist the wires according to the color onto the connection cap, then close the base cover, then install the connecting rods between the upper and lower lamp bodies, and finally fix them onto the top cover.

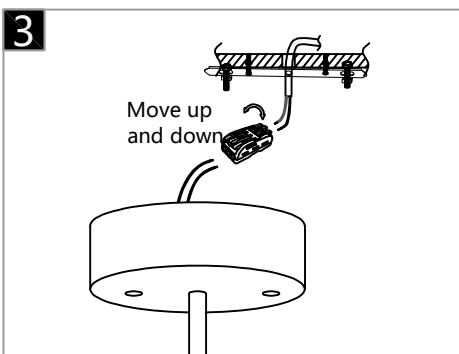


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

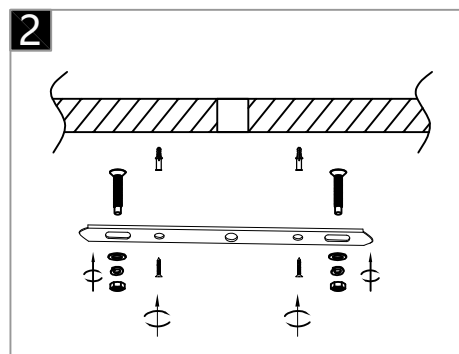

First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

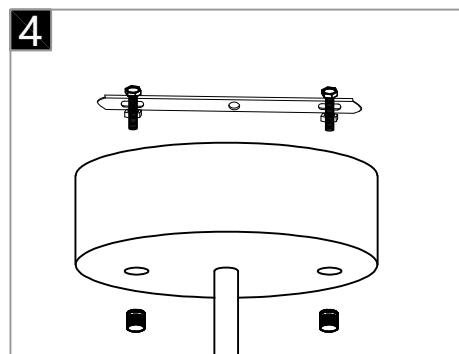


Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

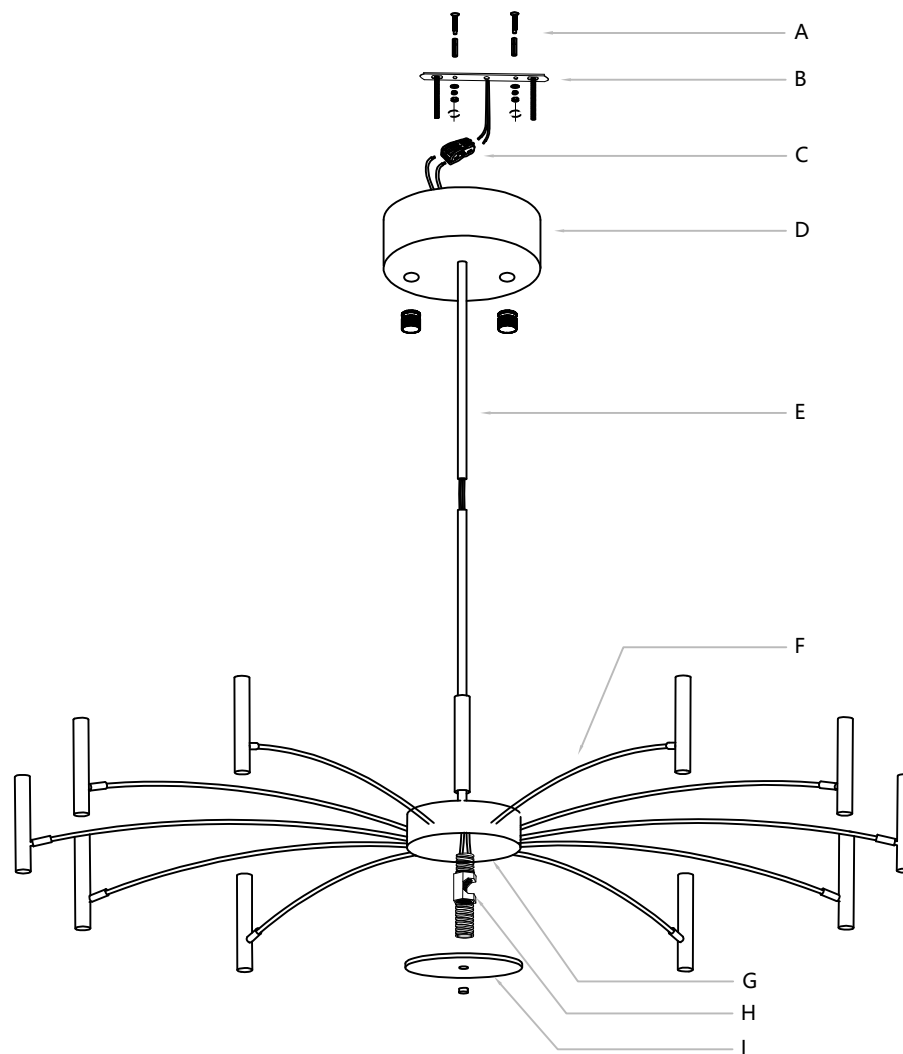


Install the lamp body bracket (F) onto the lamp body base (G), then twist the wires according to their colors onto the terminal caps, then connect the wires and pass them through the adapter nut (H), then through the upper and lower connecting rods of the lamp body (E), and finally place them onto the top cover (D). Then close the base cover (I), then install the upper and lower lamp body connecting rods (E), and finally fix them onto the top cover, Fix the screw (A) with an iron nail onto the ceiling, then fix the mounting plate (B) onto the ceiling, then connect the wires on the top cover (D) to the wiring terminals (C) on the ceiling, and finally fix the top cover (D) onto the mounting plate (B). Finally, use screws to install the jade lamp panel (E) onto the lamp body

Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

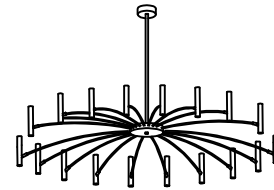


Product style diagram

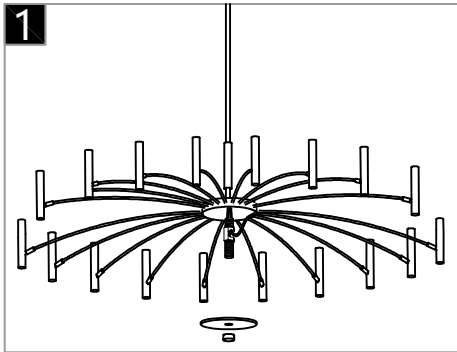


Install the lamp body bracket onto the lamp body base, then twist the wires according to the color onto the connection cap, then close the base cover, then install the connecting rods between the upper and lower lamp bodies, and finally fix them onto the top cover.

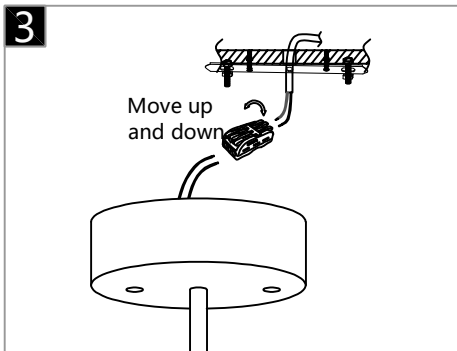


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

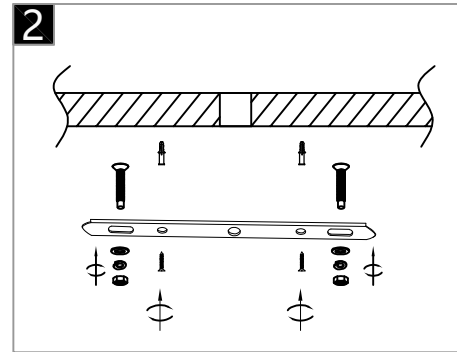

First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

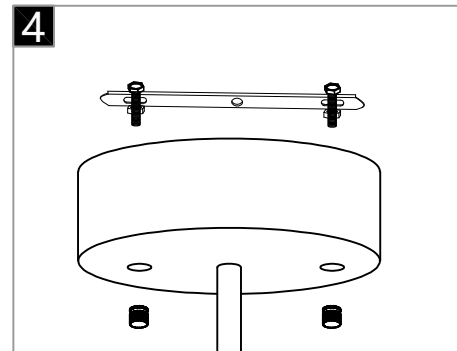


Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

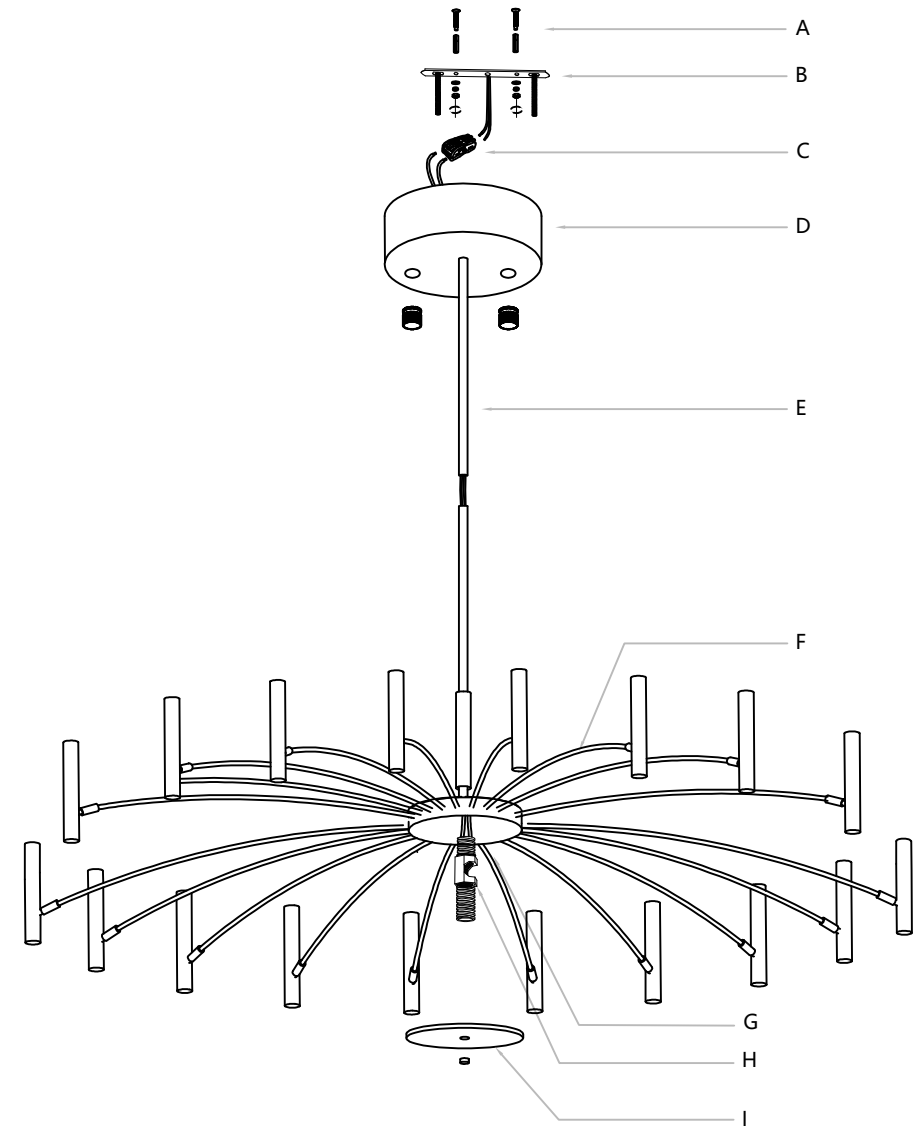


Install the lamp body bracket (F) onto the lamp body base (G), then twist the wires according to their colors onto the terminal caps, then connect the wires and pass them through the adapter nut (H), then through the upper and lower connecting rods of the lamp body (E), and finally place them onto the top cover (D). Then close the base cover (I), then install the upper and lower lamp body connecting rods (E), and finally fix them onto the top cover. Fix the screw (A) with an iron nail onto the ceiling, then fix the mounting plate (B) onto the ceiling, then connect the wires on the top cover (D) to the wiring terminals (C) on the ceiling, and finally fix the top cover (D) onto the mounting plate (B). Finally, use screws to install the jade lamp panel (E) onto the lamp body

Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

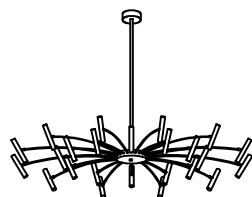


Product style diagram

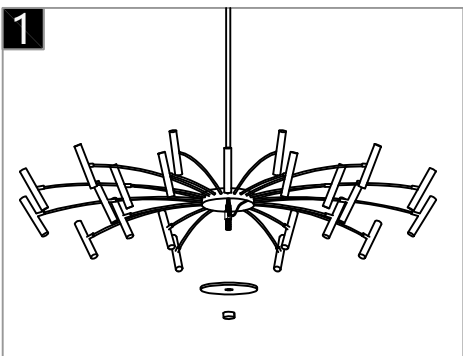


Install the lamp arm brackets alternately in a long-short pattern onto the lamp body box. Then, twist the wires onto the connection caps according to the color. Next, close the base cover. Then, install the connecting rod between the upper and lower lamp bodies. Finally, fix it on the top cover.

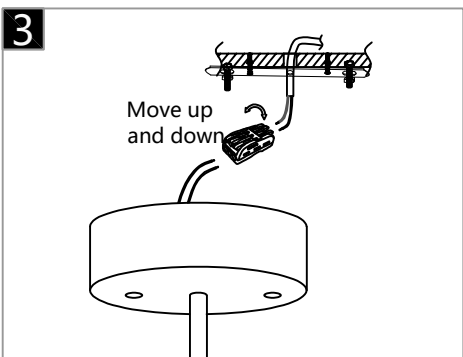


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

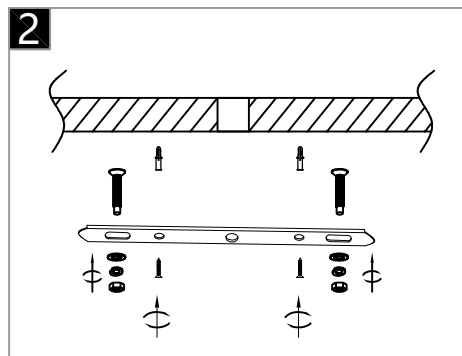

First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

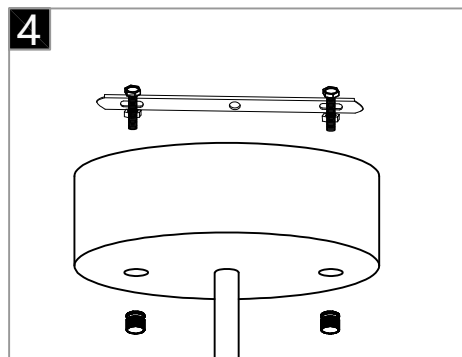

Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

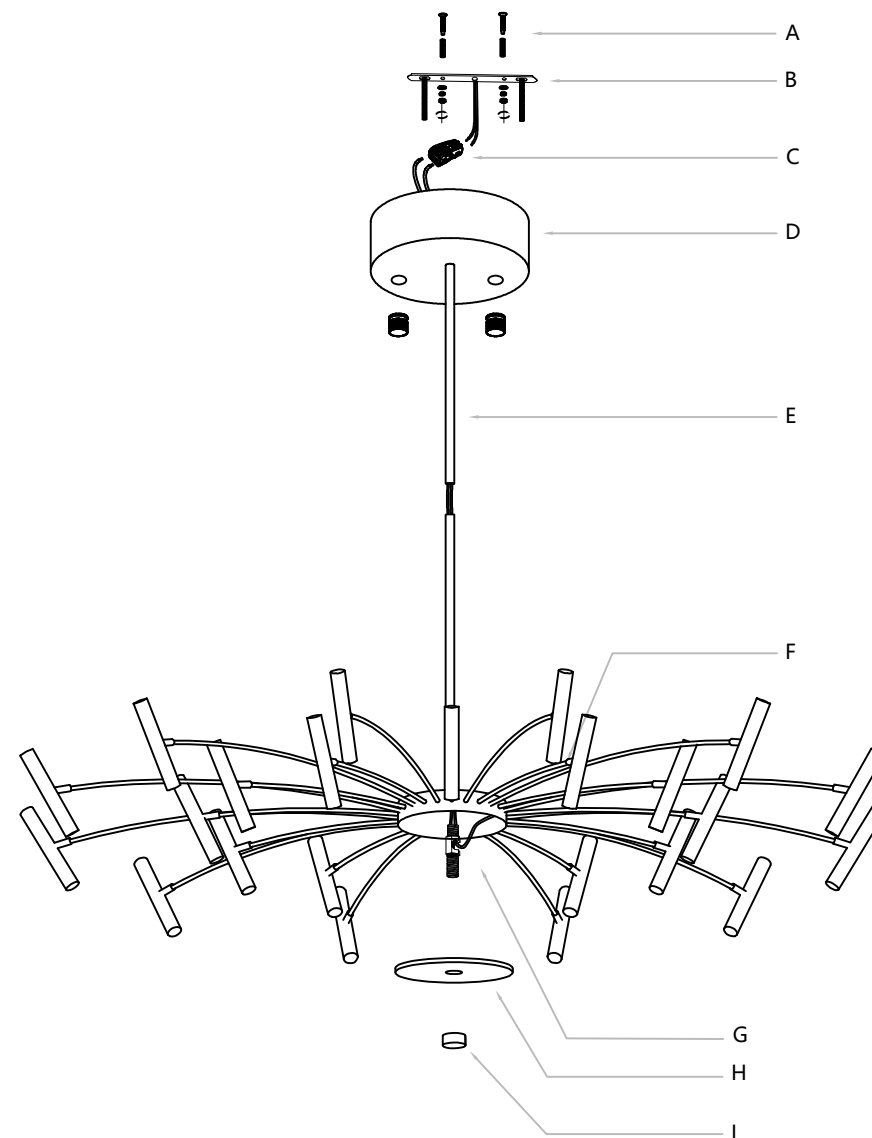

Install the lamp arm bracket (F) alternately in a long and short pattern onto the lamp body box (G). Then, wrap the wires around the terminal cap according to the color of the wires. Next, connect the wires together and pass them through the adapter nut (H), then through the upper and lower connecting rods of the lamp body (E). Finally, place it on the top cover (D). Then, close the bottom cover (I). Next, install the upper and lower lamp body connecting rods (E), and finally fix them on the top cover. Fix the screw (A) with a nail on the ceiling, then fix the mounting plate (B) on the ceiling. Then, connect the wires on the top cover (D) to the terminal terminals (C) on the ceiling, and finally fix the top cover (D) on the mounting plate (B). Finally, lock the lamp cover (D) with a nut.