


Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.



Product style diagram


Steps of installation

1

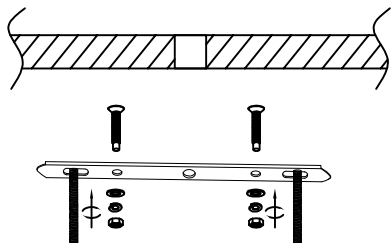


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

2

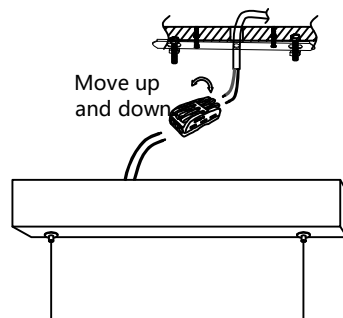


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

3

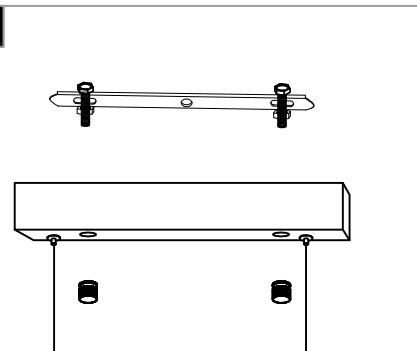


Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

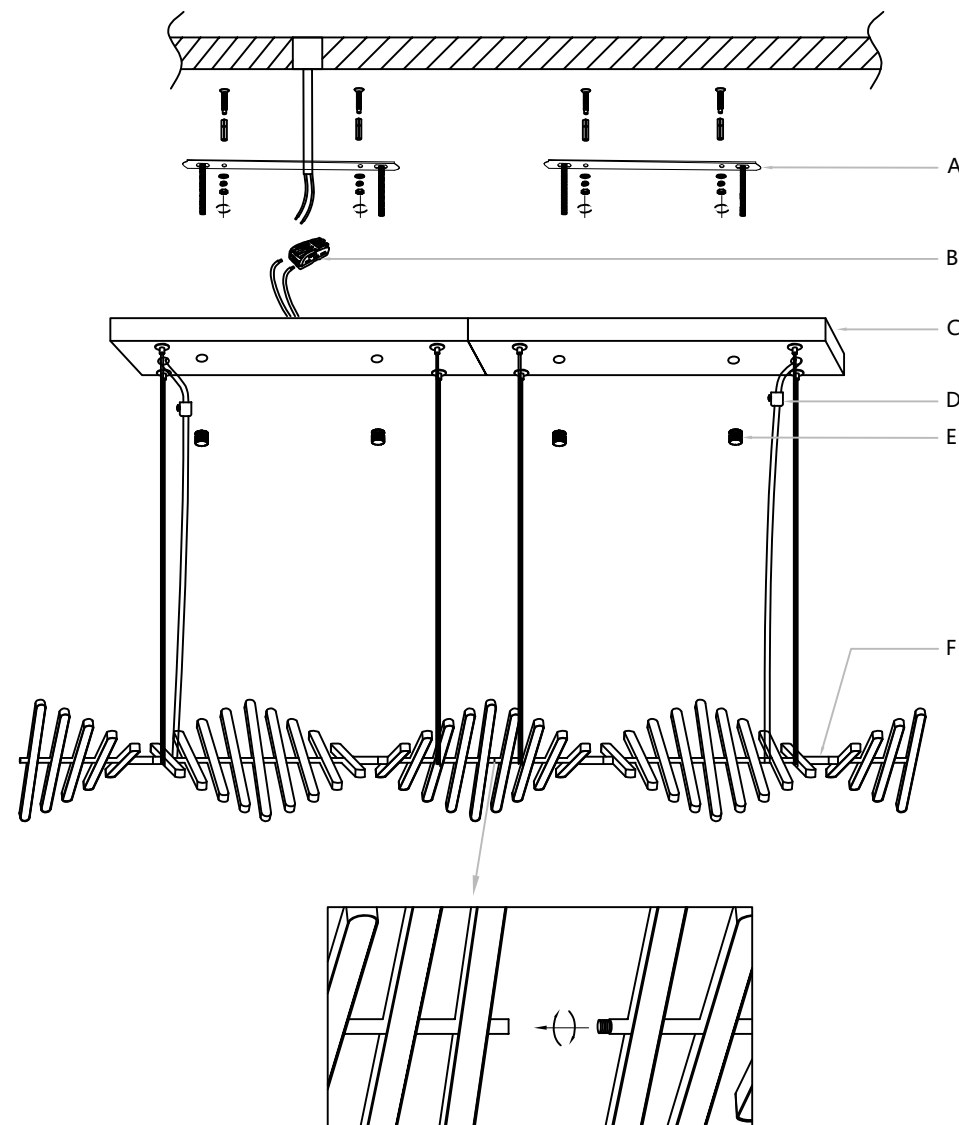

The lamp body (F) is spliced together, then the mounting plate (A) is fixed to the ceiling, and the wire buckle (D) is locked to the junction box (C), and then the wires of the junction box (C) are connected to the junction box (B) with the reserved wires. The junction box (C) is then aligned with the threaded bar on the ceiling and locked with the nut (E).


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

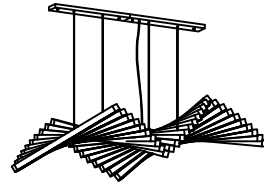


Product style diagram


Steps of installation

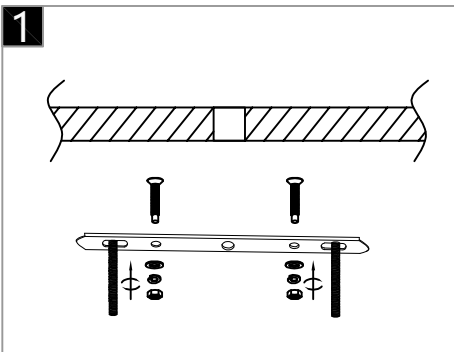


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

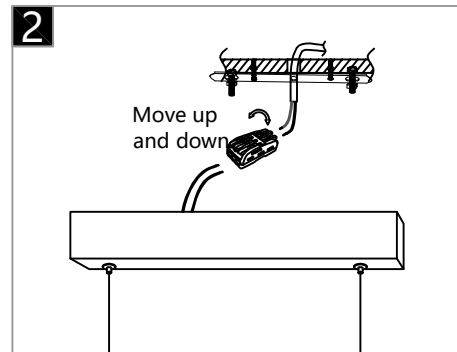

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

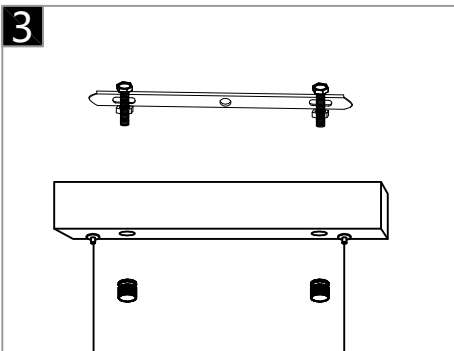

Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

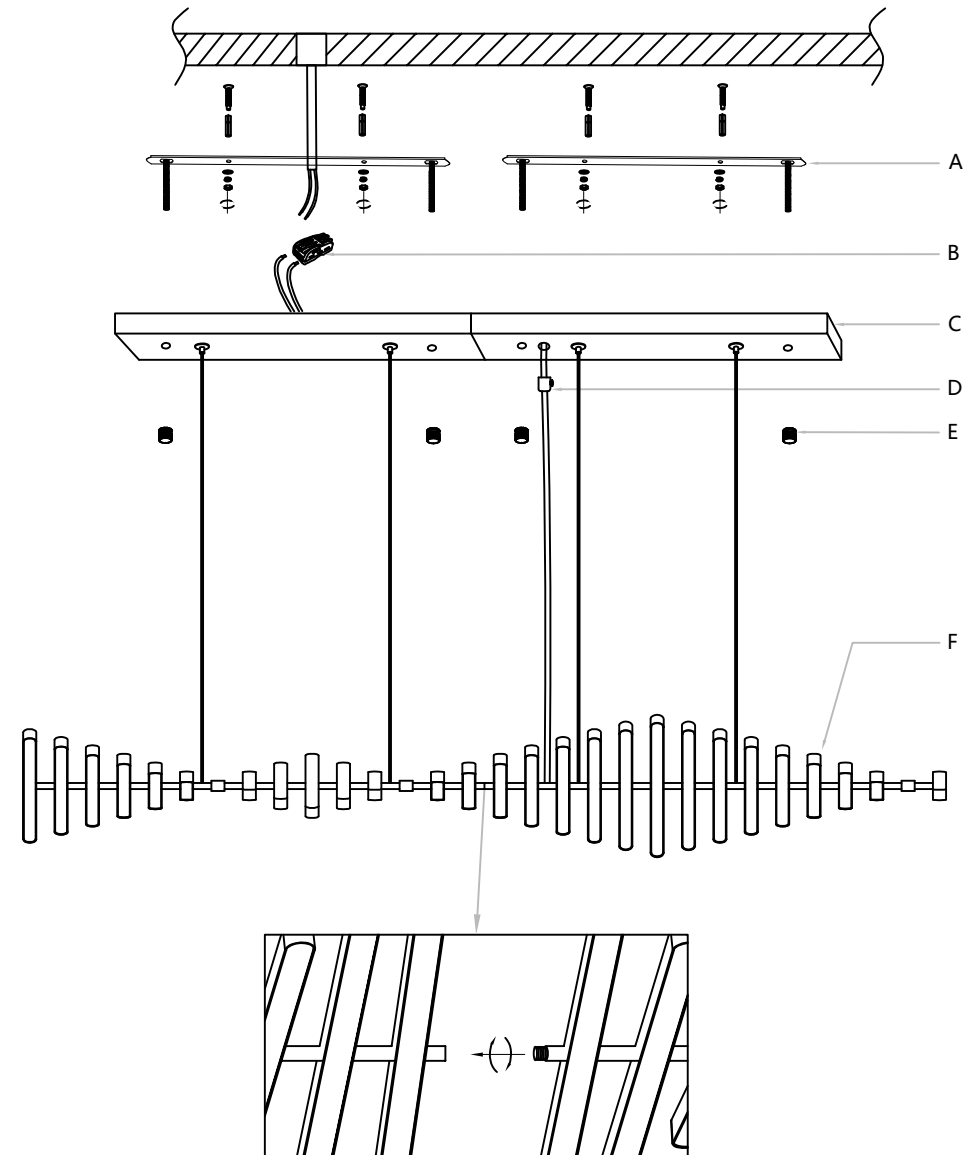

The lamp body (F) is spliced together, then the mounting plate (A) is fixed to the ceiling, and the wire buckle (D) is locked to the junction box (C), and then the wires of the junction box (C) are connected to the junction box (B) with the reserved wires. The junction box (C) is then aligned with the threaded bar on the ceiling and locked with the nut (E).