



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.


Steps of installation

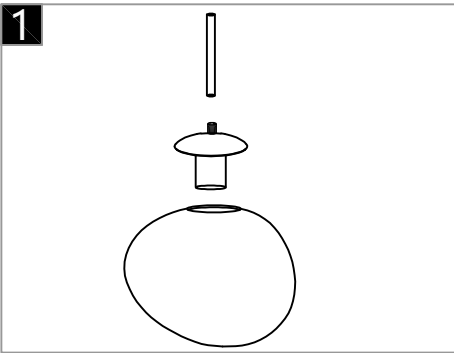


Pass the wire through the connecting rod, then install the lamp cap onto the connecting rod, and then screw the lampshade onto the lamp cap.

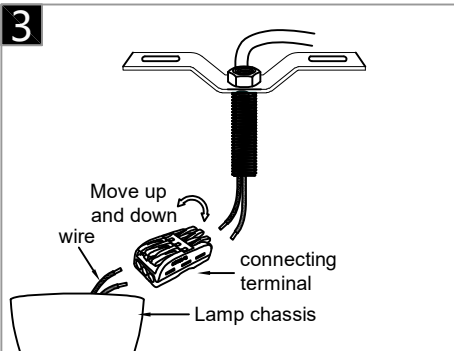


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)




Product style diagram

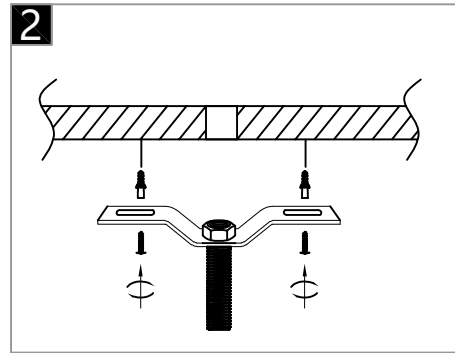

Attach the mounting plate to the ceiling with self-tapping screws.

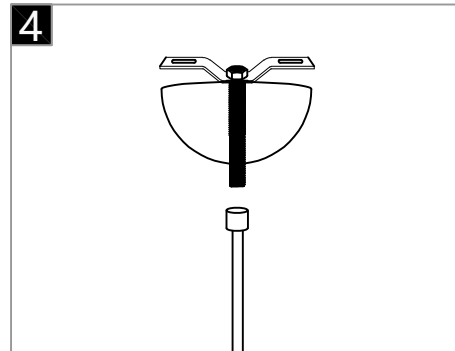


First, loosen the lockline buckle, then lift the top cover up to the ceiling, and finally tighten the lockline buckle.

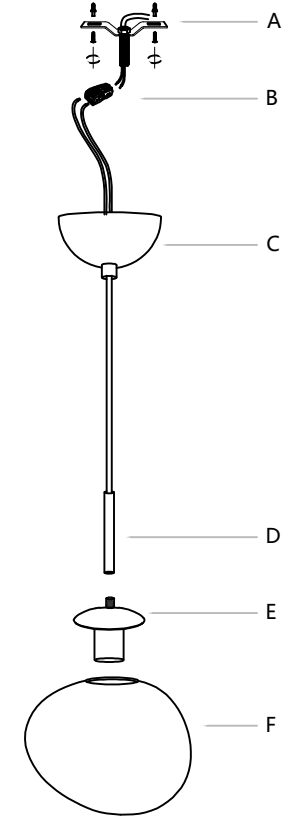

Pass the wire through the connecting rod (D), then install the lamp cap (E) onto the connecting rod (D), and then screw the lampshade (F) onto the lamp cap (E). Fix the mounting plate (A) to the ceiling, then connect the wires reserved for the top cover (C) and the wires on the ceiling to the terminal (B), then align the hole position on the side of the top cover (C) with the hole position on the mounting plate (A), then tighten the screws,


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

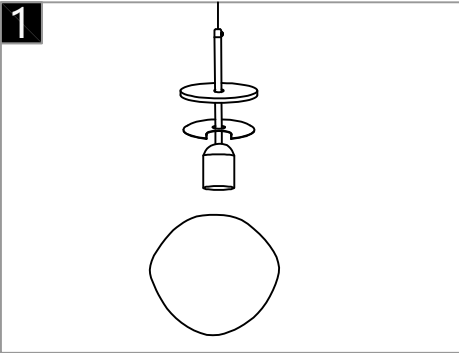


Install the glass lampshade onto the lamp head, and then secure it with the locking nut.

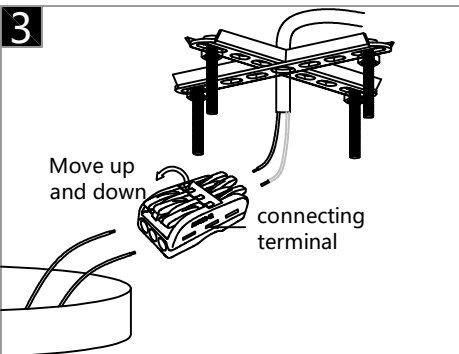


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

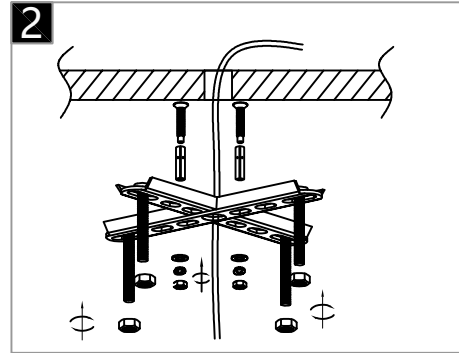

First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

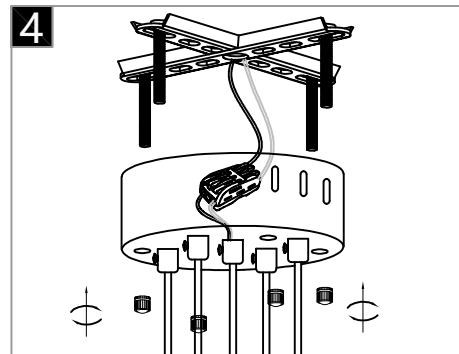

Align the top cover hole position on the luminaire with the screws on the mounting plate and then secure from the bottom using the nut.

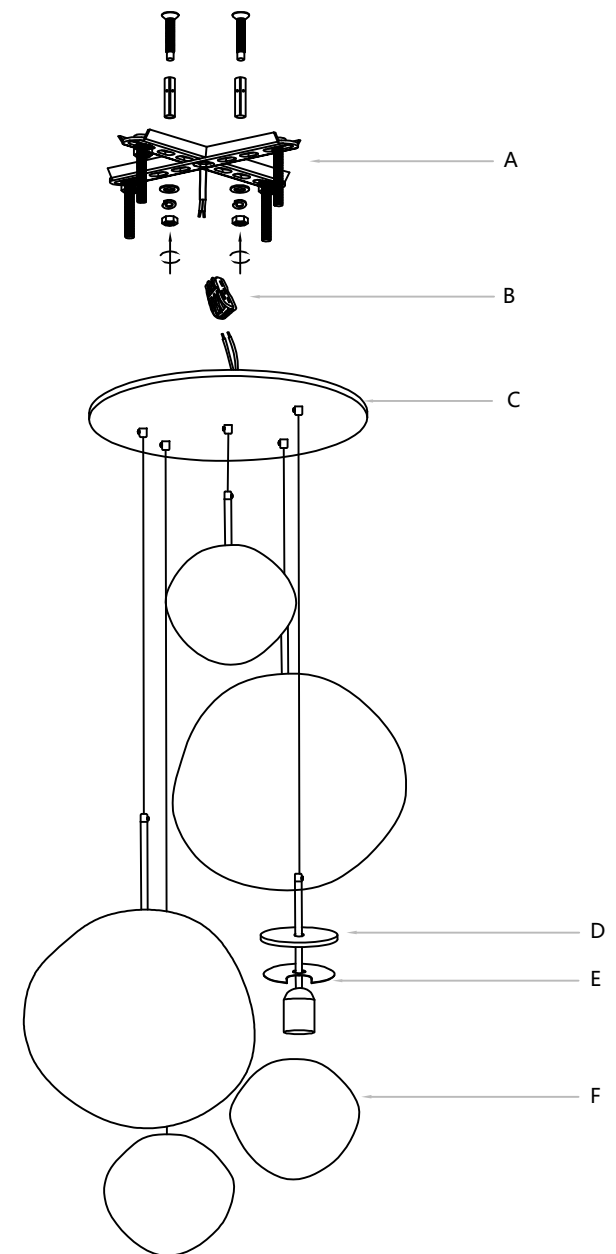

Place the lamp cap (E) and the lamp base inside the glass lampshade (F), then seal the glass lampshade (F) with the circular piece (D), and then tighten the lock wire nut. Next, fix the mounting plate (A) to the ceiling. Then connect the wire (C) reserved for the top cover to the wire on the ceiling and to the terminal block (B). Next, align the hole on the top cover (C) with the hole on the mounting plate (A), and finally tighten the screws.