


Warning:
This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications.
This product is suitable for indoor installation.

2



The diagram shows a horizontal beam with diagonal hatching. A central hinge is indicated by a vertical line passing through the beam. Below the beam, there are two vertical supports, each represented by a thick vertical line with a horizontal base. At the bottom of each support, there is a curved arrow indicating a reaction moment. The beam is divided into two equal segments by the central hinge.

3

Diagram illustrating the connection of the connecting terminal to the lamp chassis. The terminal is shown being moved up and down to connect the wire to the chassis.

Labels in the diagram:

- Move up and down
- wire
- connecting terminal
- Lamp chassis


4



Insert the decorative panel **(D)** onto the lamp arm **(G)**, then tighten the screws with a hexagonal wrench **(F)**. Next, install the light source, screw the lamp cover **(E)** onto the connection head of the lamp arm **(G)**, and finally install it onto the lamp cap. Fix the mounting plate **(A)** to the ceiling. Next, connect the wires reserved for the top cover **(C)** to the wiring terminal **(B)** on the ceiling. Then align the holes on the top cover **(C)** with the holes on the mounting plate **(A)**, and tighten the screws.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

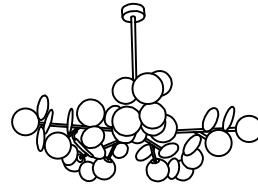


Product style diagram


Steps of installation

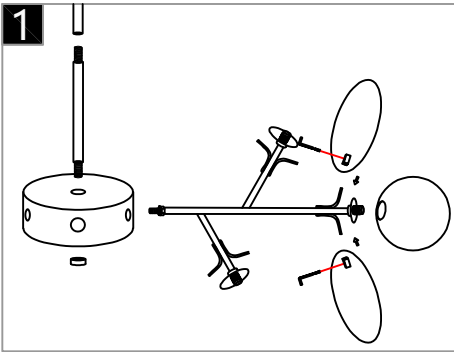


Install the decorative panel onto the lamp pole bracket, then tighten the screws with a hex wrench. Next, install the light source, twist the lampshade onto the lamp head, then install the lamp pole onto the lamp box, and then connect the upper and lower connecting rods of the lamp body together, and finally install them onto the lamp box.

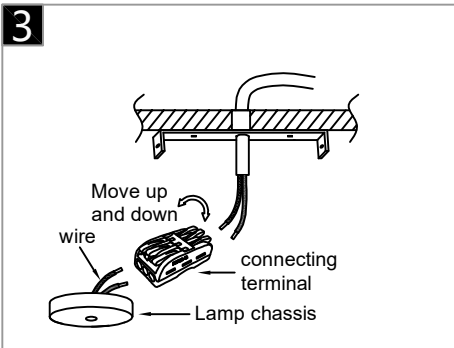


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

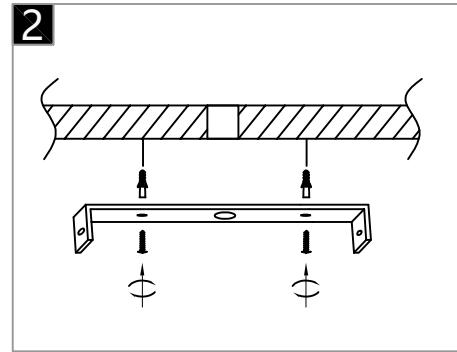

Attach the mounting plate to the ceiling with self-tapping screws.

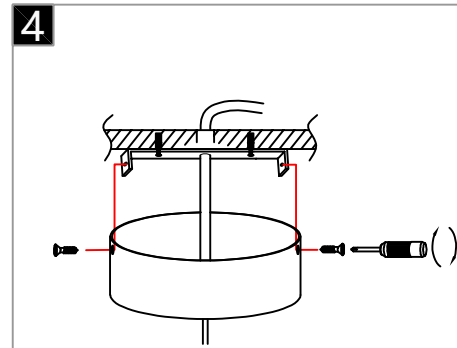

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

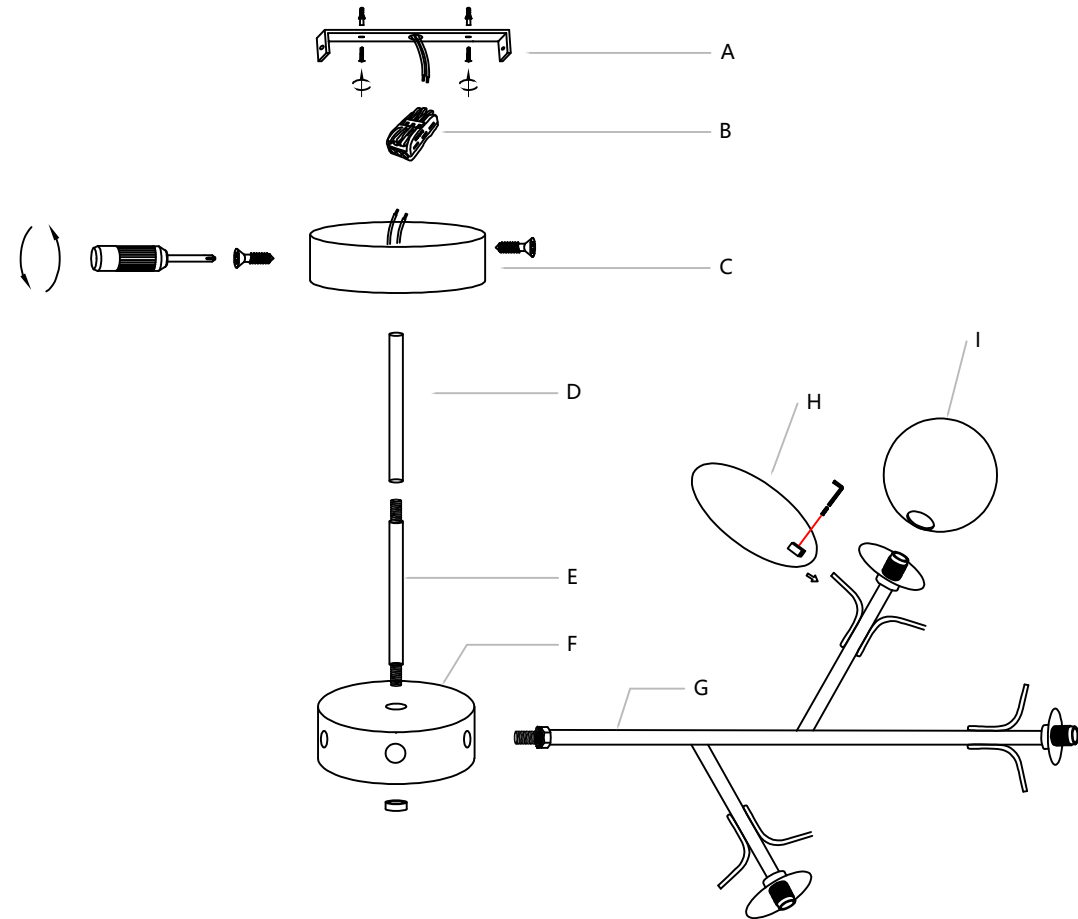

Install the decorative panel (H) onto the lamp pole bracket (G), and then tighten the screws with a hex wrench. Next, install the light source, twist the lampshade (I) onto the lamp head, then install the entire lamp pole (G) onto the lamp box (F), and then install the upper connecting rod (D) onto the lower connecting rod (E), then pass the wires through the connecting rods, then lock the screws, and finally install the entire assembly onto the top cover (C). Fix the mounting plate (A) to the ceiling. Next, connect the wires reserved for the top cover (C) to the wiring terminal (B) on the ceiling. Then align the holes on the top cover (C) with the holes on the mounting plate (A), and tighten the screws.