



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

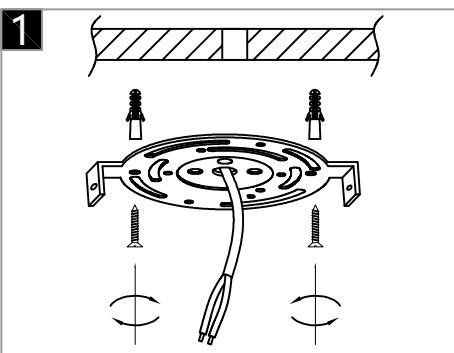


Fix the installation plate to the ceiling.

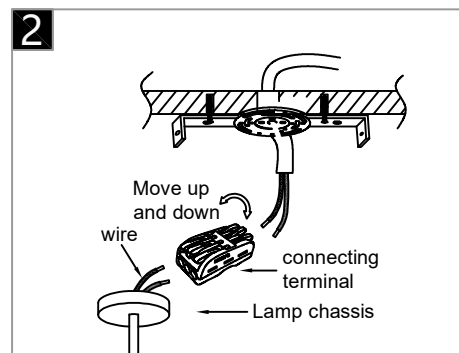

Connect the wires on the top cover to the wires on the ceiling and the terminal block.

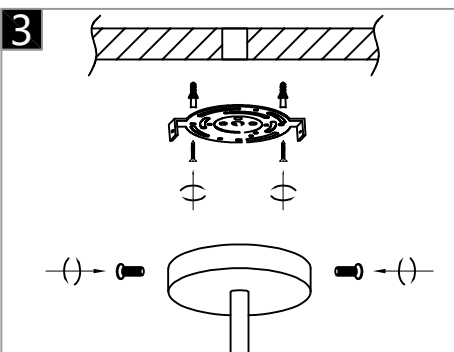


Align the holes on the top cover with the holes on the installation plate, and tighten the screws.

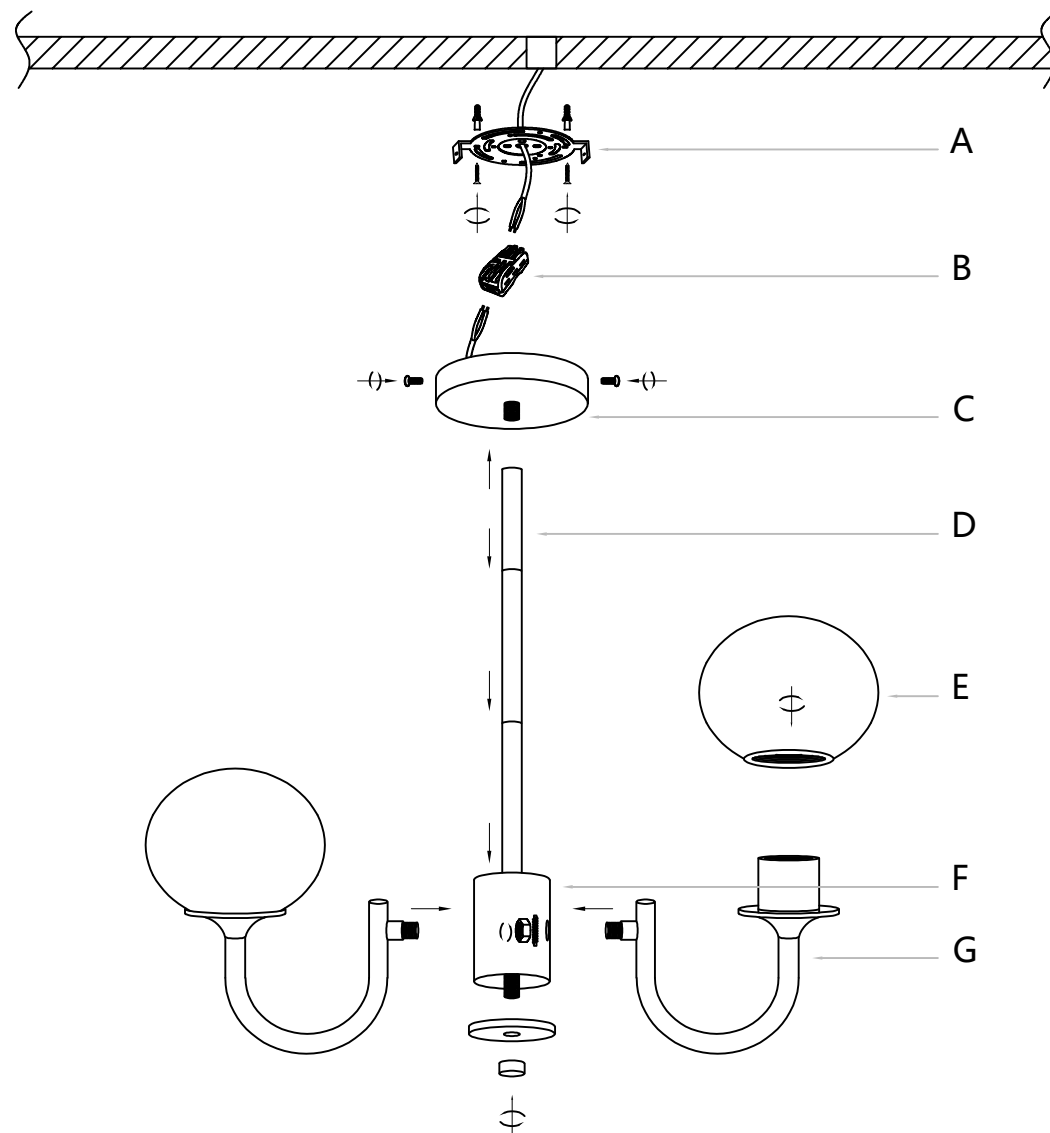

First, the lamp base rod (G) is installed onto the lamp base (F), connecting the wires of group ① and group ② with those of group ③ in the same color and with the spare wires. Then, the lamp rods (D) are combined into one, with the spare wires passing through the lamp rods (D). Install it onto the lamp base (F), align the cover with the threaded rod and tighten the cover and the nut. Next, pass the spare wires through the top cover (C) and install it onto the lamp rods (D). Then, fix the mounting plate (A) to the ceiling. Then, connect the wires on the top cover (C) to the wires on the ceiling using the junction box (B). Next, align the holes on the top cover (C) with the holes on the mounting plate (A) and tighten the screws. Finally, the bulb is installed onto the lamp base (G), and the glass lampshade (E) is tightened.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

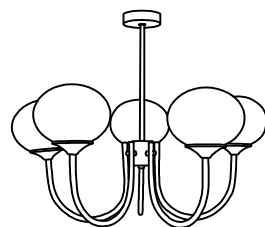


Product style diagram


Steps of installation

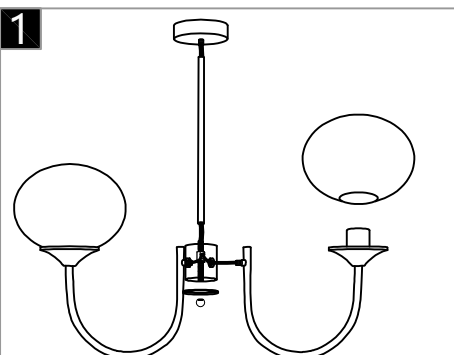


First, assemble the lamp arm bracket onto the lamp housing. Then connect the wires according to the color and pass them through the threaded rod. Insert them into the top cover, and then tighten the lamp housing cover onto the lamp housing.

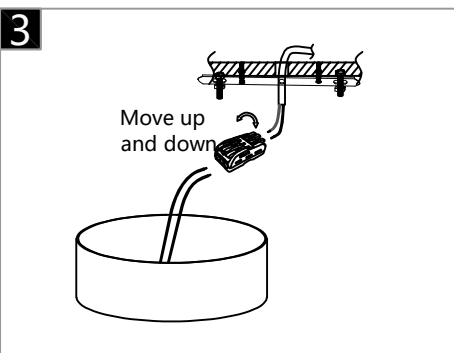


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

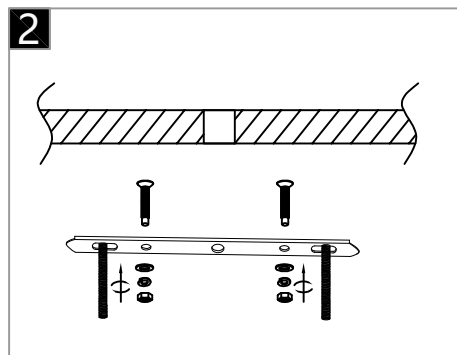

First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

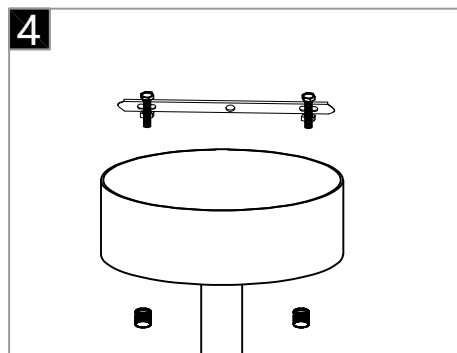

Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

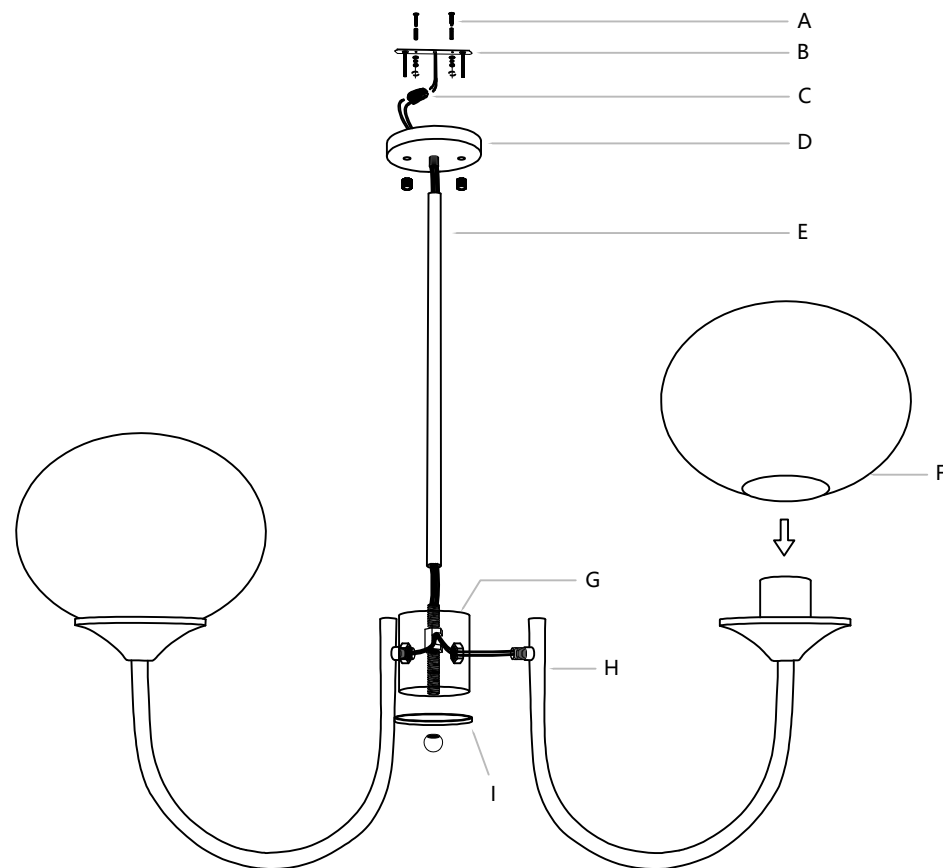

First, assemble the lamp arm bracket (H) onto the lamp housing (G). Then connect the wires according to the color and pass them through the threaded rod (E), then insert them into the top cover, and finally tighten the lamp housing cover (I) onto the lamp housing (G). Next, fix the screws with nails (A) onto the ceiling, and then fix the mounting plate (B) onto the ceiling. Then connect the wires on the top cover (D) to the terminal block on the ceiling (C). Finally, fix the top cover (D) onto the mounting plate (B). Lastly, install the light source onto the lamp head, and then screw the glass cover (F) onto the lamp head.