



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

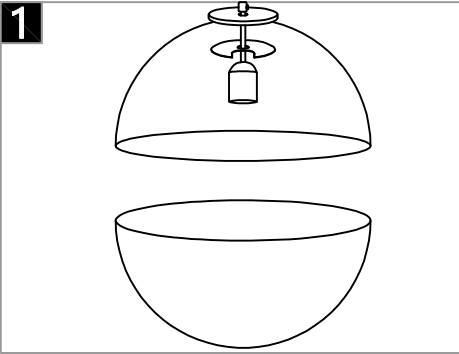


Place the lamp cap and lamp head inside the lamp head cover, then fix the lamp head cover with the circular component, and finally screw the lamp cover onto the lamp head cover.

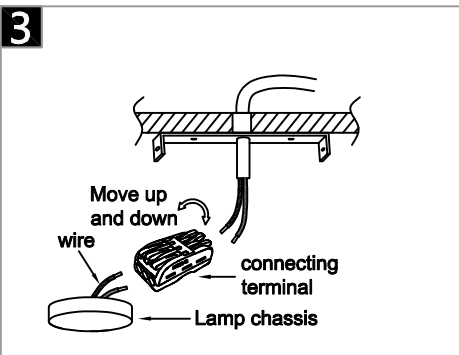


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

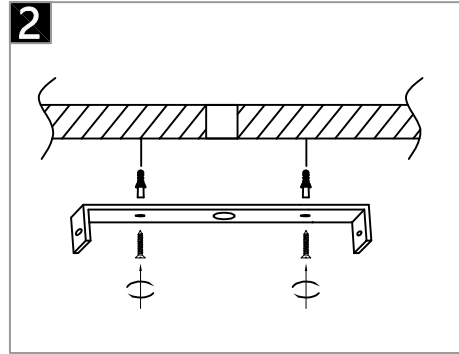

Attach the mounting plate to the ceiling with self-tapping screws.

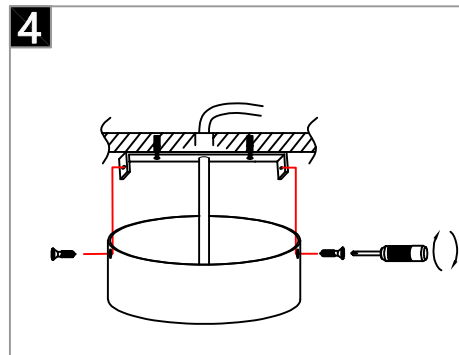

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

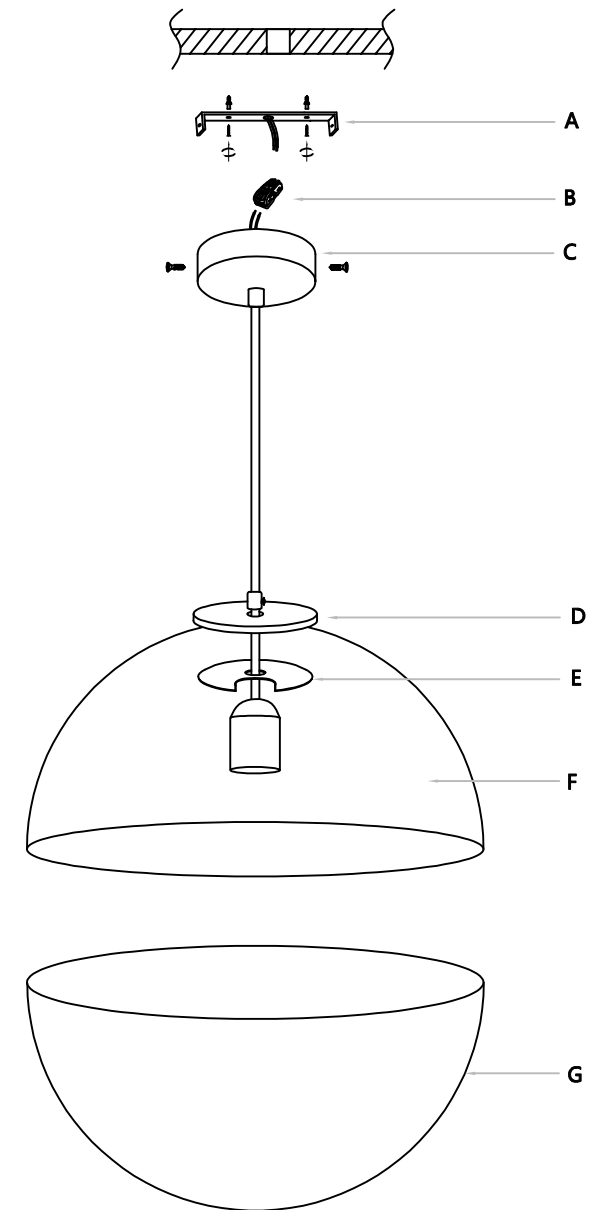


Place the lamp cap (E) and the lamp head into the lamp head cover (F), then use the circular component (D) to fix the lamp head cover (F), then screw the lamp shade (G) onto the lamp head cover (F). Next, fix the mounting plate (A) to the ceiling. Then connect the reserved wires for the top cover (C) to the wires on the ceiling and the junction box (B). Next, align the holes on the top cover with the holes on the mounting plate, and finally tighten the screws.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.


Steps of installation

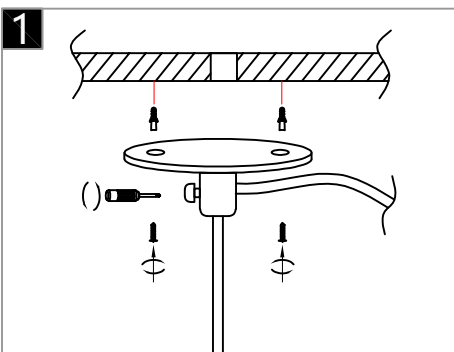


Fix the hanging board to the ceiling, Then pass the wire through the lock buckle.

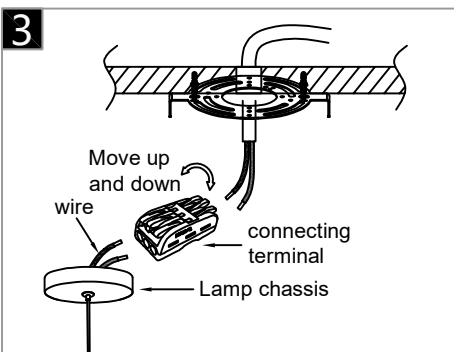


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

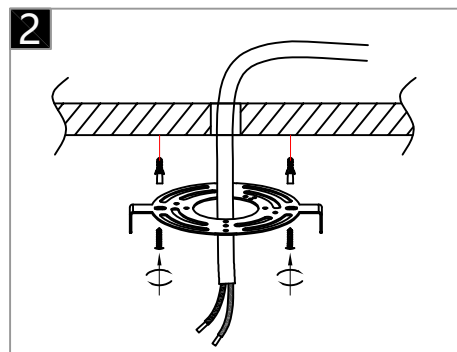


Fix the hanging board to the ceiling.

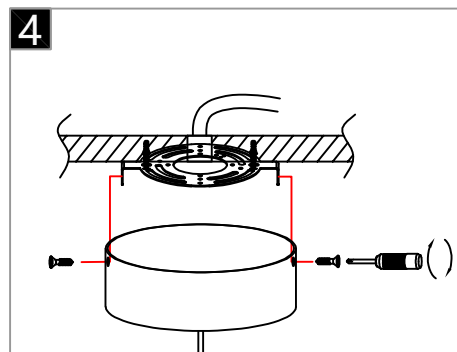

Lock the lamp chassis onto the hanging board.

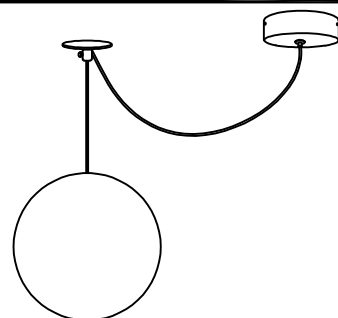

Product style diagram

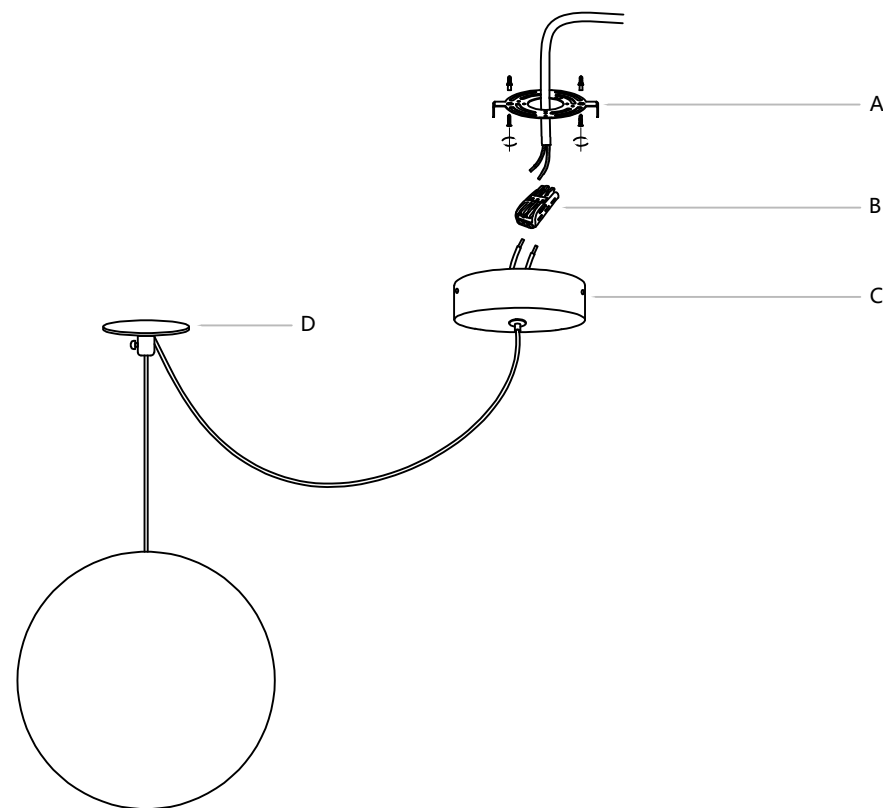

Install the lockline clip (D) onto the ceiling, then fix the mounting plate (A) to the ceiling. Next, connect the wire (C) reserved for the top cover to the terminal block (B) on the ceiling. Then, align the holes on the side of the top cover with the holes on the mounting plate, and tighten the screws.