


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

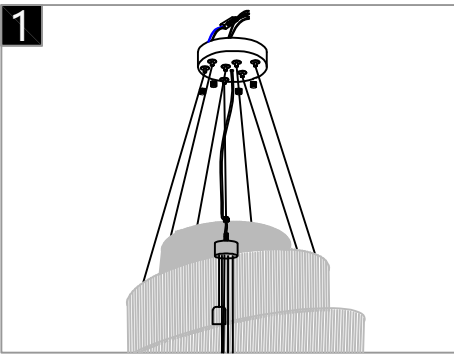


Install the lamp head hanging wire box onto the lamp body, and then reserve the wires on the top cover.

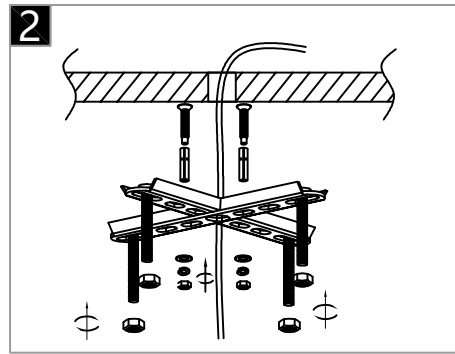


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

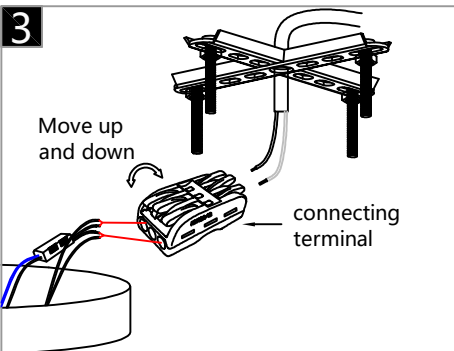

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

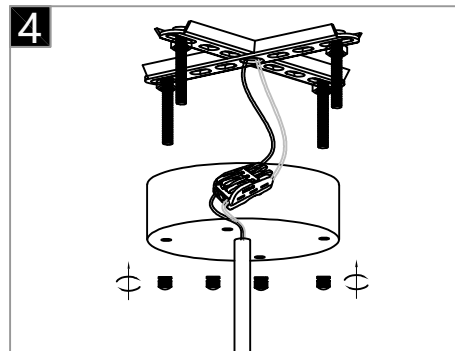

Align the holes on the canopy with the screws on the mounting plate, and then use the wing nut to secure it from the bottom.

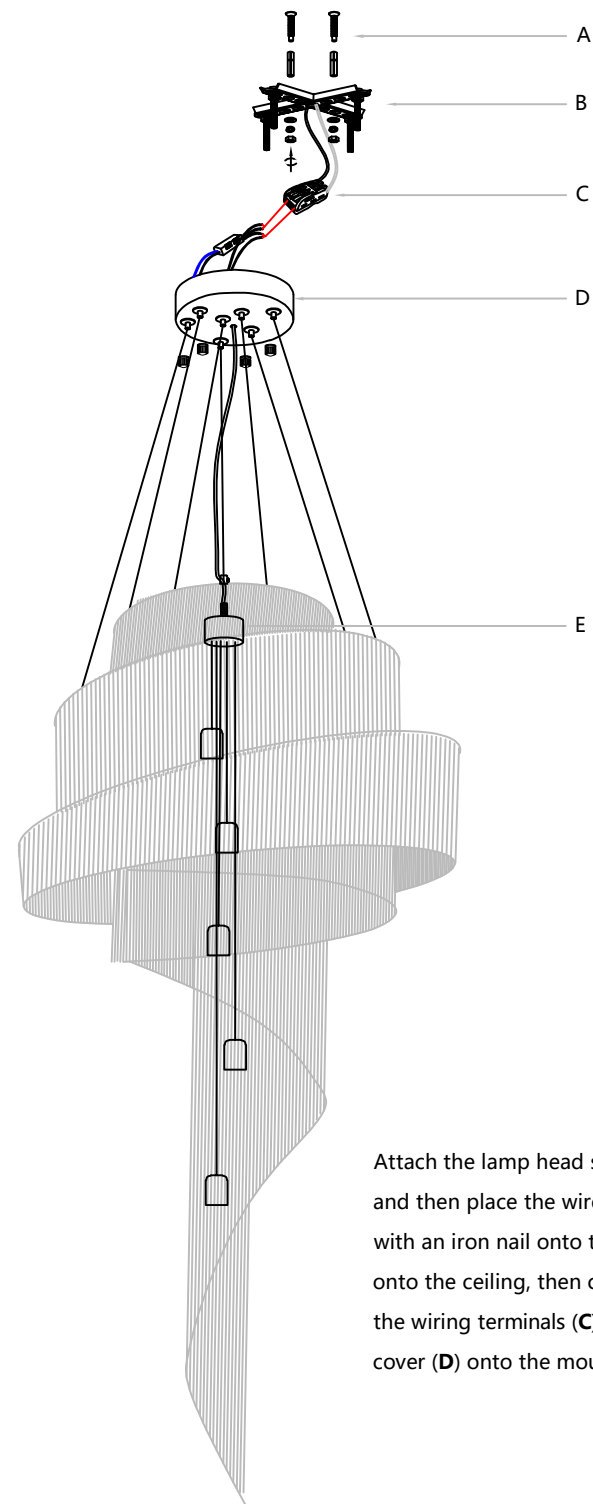


Attach the lamp head suspension wire box (E) to the lamp body, and then place the wires on the top cover (D). Fix the screw (A) with an iron nail onto the ceiling, then fix the mounting plate (B) onto the ceiling, then connect the wires on the top cover (D) to the wiring terminals (C) on the ceiling, and finally fix the top cover (D) onto the mounting plate (B).


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.


Steps of installation

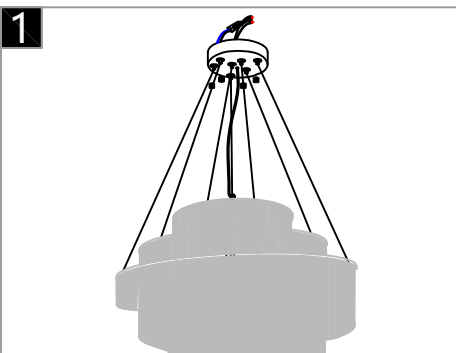


Install the lamp head hanging wire box onto the lamp body, and then reserve the wires on the top cover.

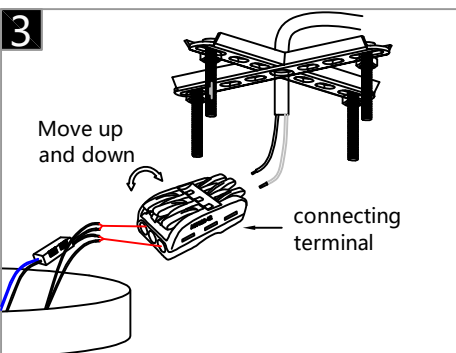

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

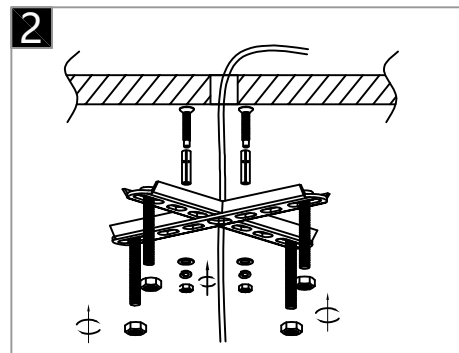


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

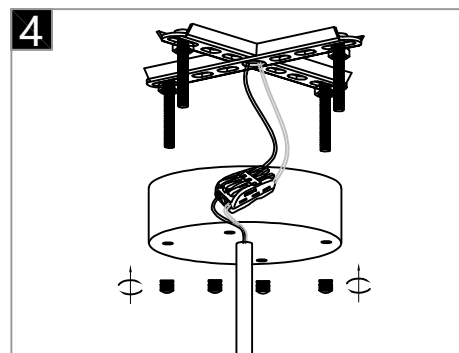

Align the holes on the canopy with the screws on the mounting plate, and then use the wing nut to secure it from the bottom.

Product style diagram

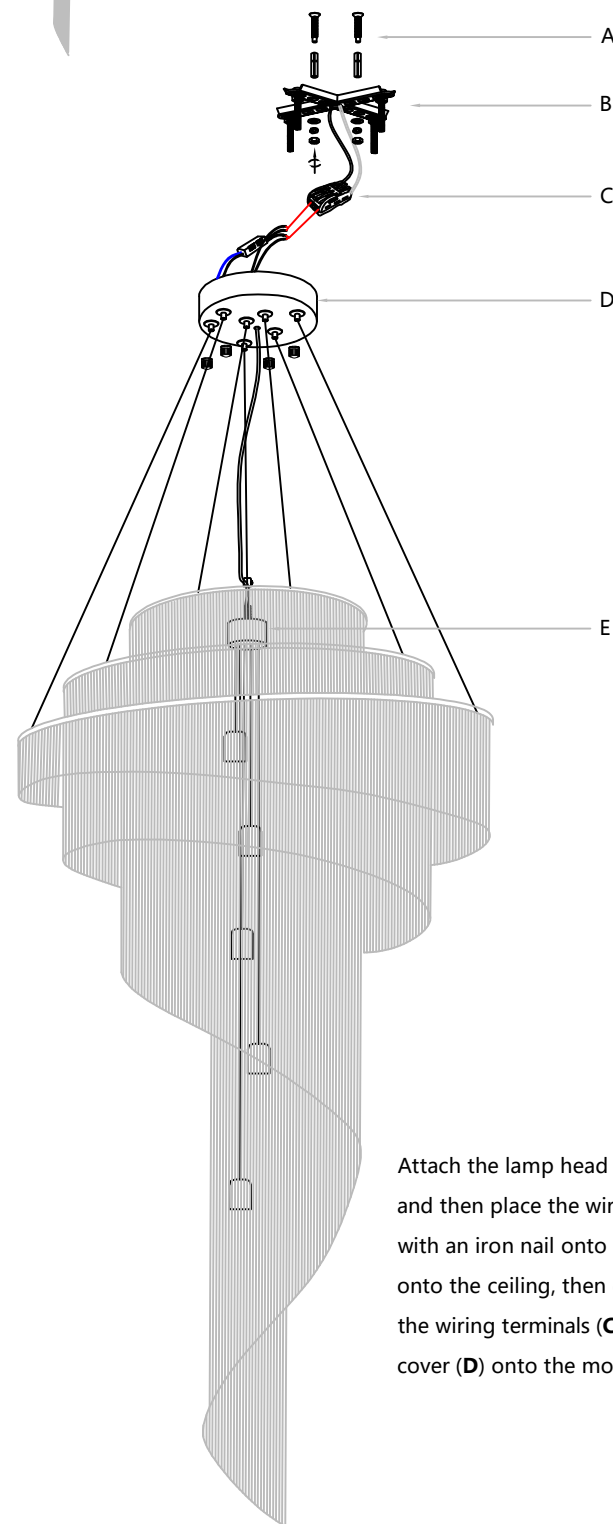

Attach the lamp head suspension wire box (E) to the lamp body, and then place the wires on the top cover (D). Fix the screw (A) with an iron nail onto the ceiling, then fix the mounting plate (B) onto the ceiling, then connect the wires on the top cover (D) to the wiring terminals (C) on the ceiling, and finally fix the top cover (D) onto the mounting plate (B).