


Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.



Product style diagram


Steps of installation

1

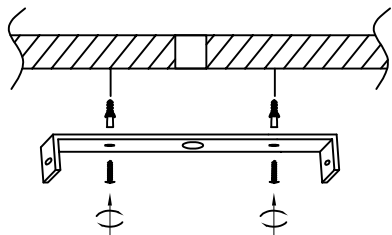


Attach the mounting plate to the ceiling with self-tapping screws.

2

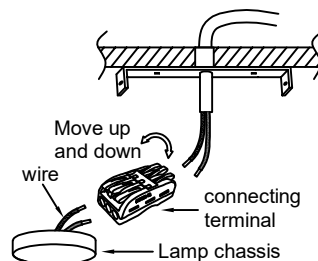


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

3

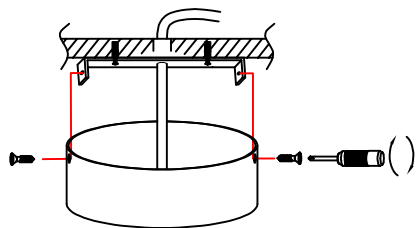

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

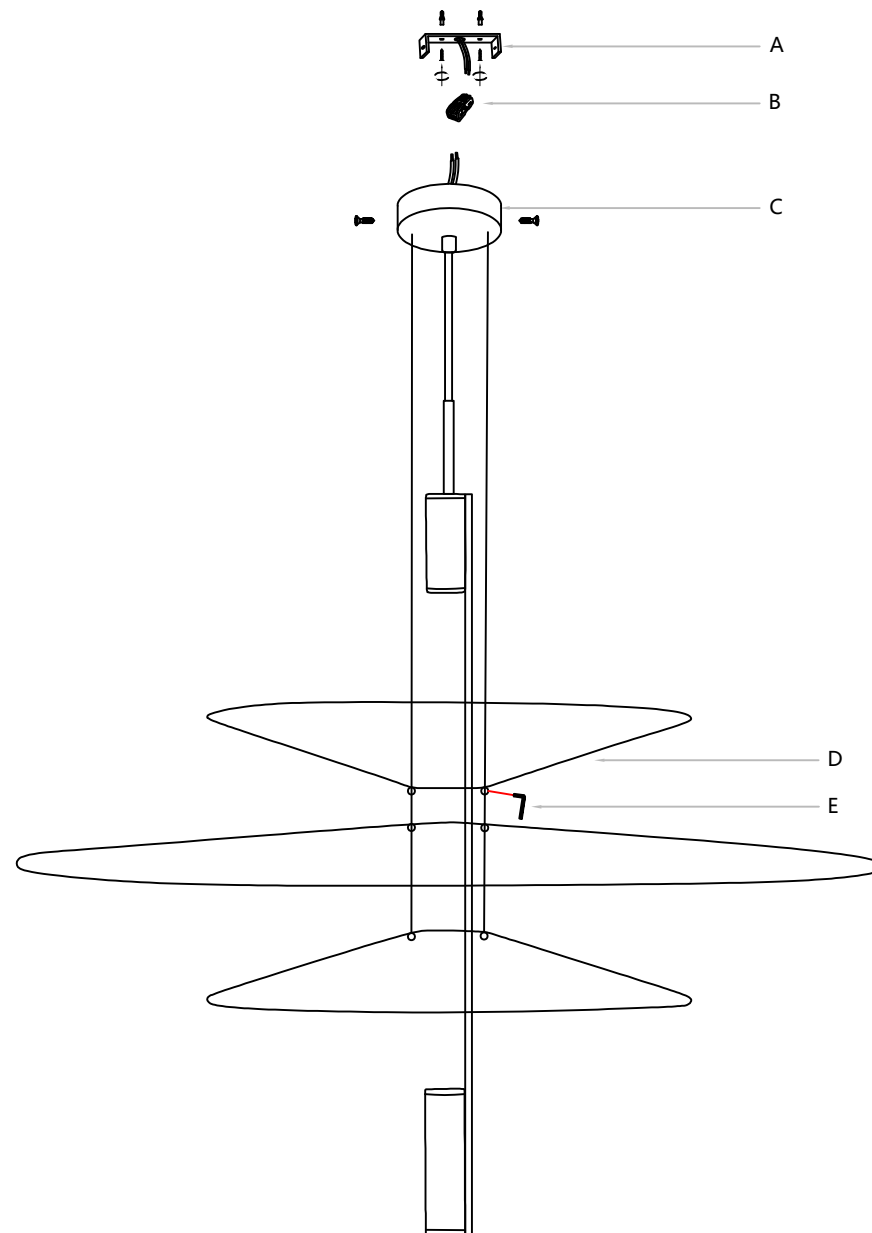


Fix the mounting plate (A) to the ceiling, then connect the wires reserved for the top cover (C) and the wires on the ceiling to the terminal (B), then align the hole position at the bottom of the top cover (C) with the hole position on the mounting plate (A), then tighten the screws, Attach the lampshade (D) to the wire line on the top cover (C), adjust the height of the lampshade (D), and then use the wrench (E) to lock it in place.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.


Steps of installation

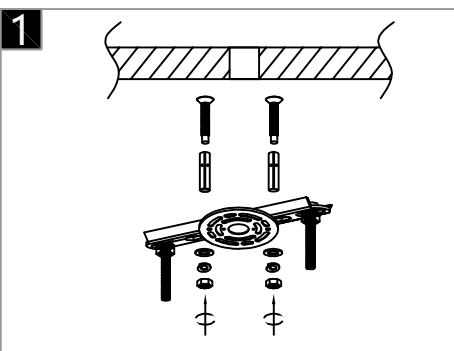


Attach the mounting plate to the ceiling.

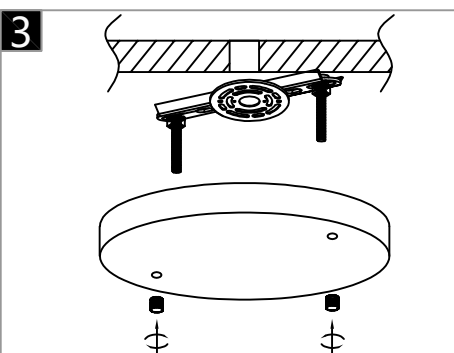


Align the holes of the top cover with those of the mounting plate, and tighten the screws.

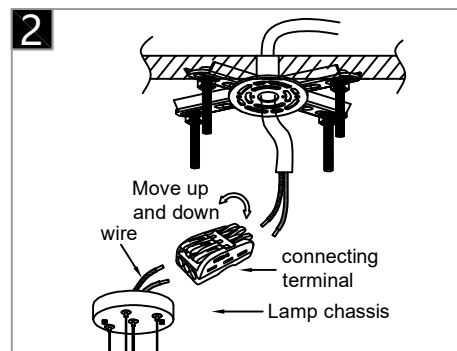

Connect the wires of the top cover to those of the ceiling using the terminal block.

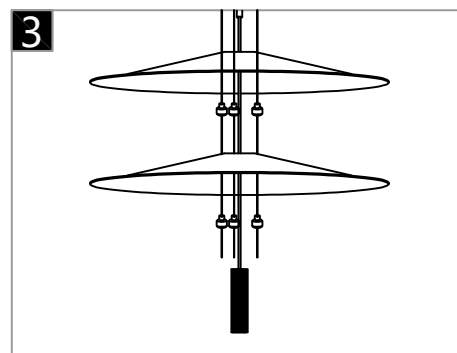

Pass the steel wire rope through the positioner, and align the steel wire rope with the groove of the lampshade and insert it. (The positioner can be adjusted to change the height of the lampshade.)

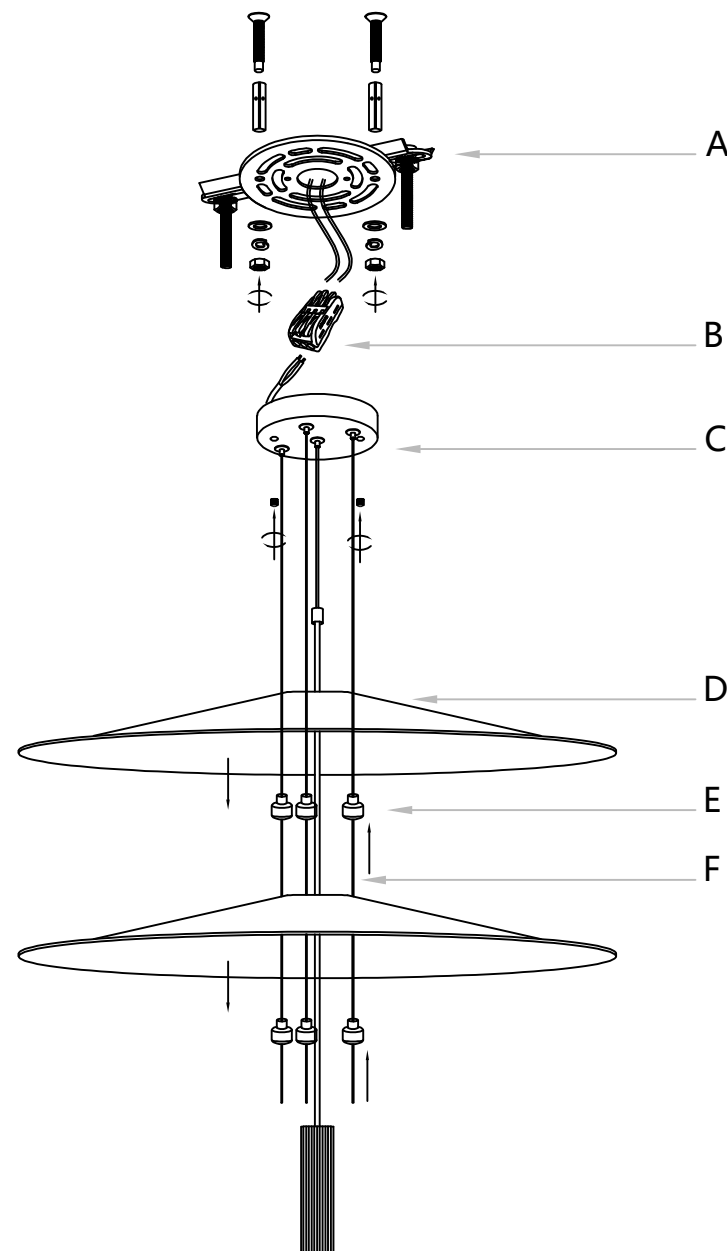

First, install the mounting plate (A) onto the ceiling. Then, using the terminal block (B), connect the wires of the top cover (C) to the wires on the ceiling. Next, align the holes of the top cover (C) with the threaded rod of the mounting plate (A), and tighten the nut. Then, pass the steel wire rope (F) through the positioner (E), and align the steel wire rope (F) with the groove of the lampshade (D) and insert it. (The positioner can be adjusted to change the height of the lampshade.)