


Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.



Product style diagram


Steps of installation

1

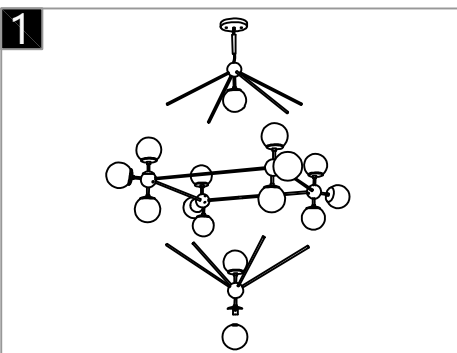


First, assemble the lamp arm brackets together. Then, connect the wires by color and pass them through the threaded rod before inserting them into the top cover.

3

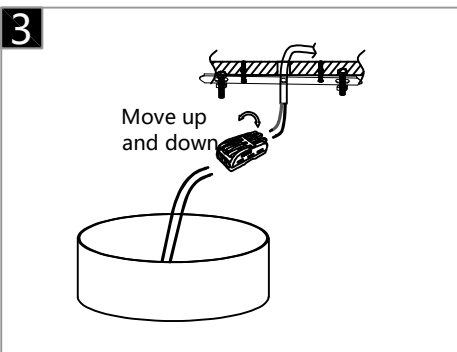


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

2



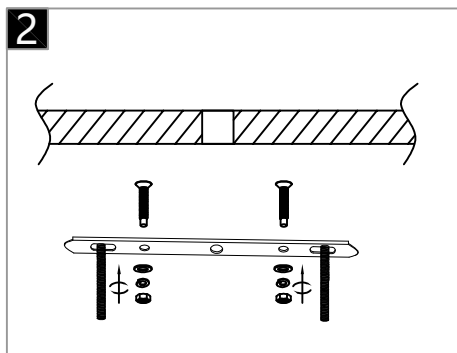


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

4

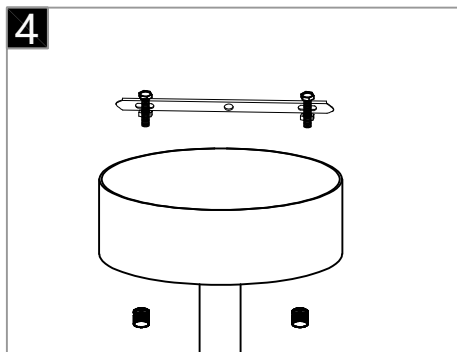


Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

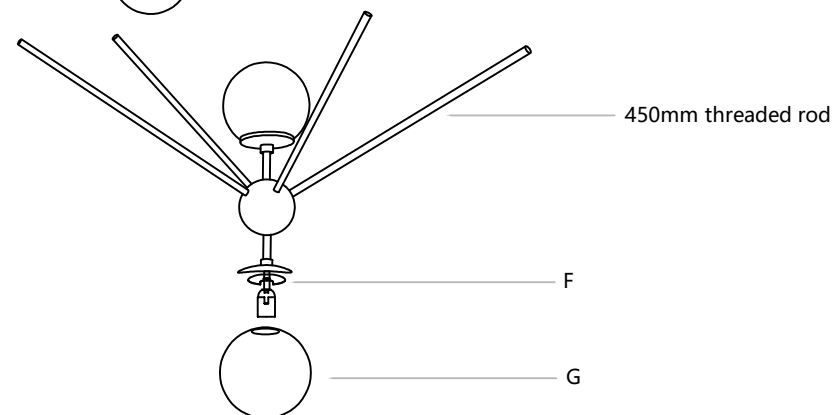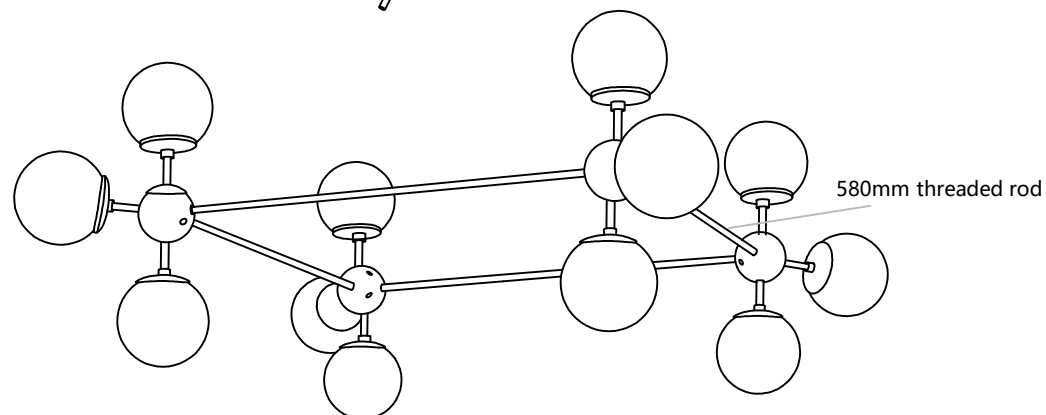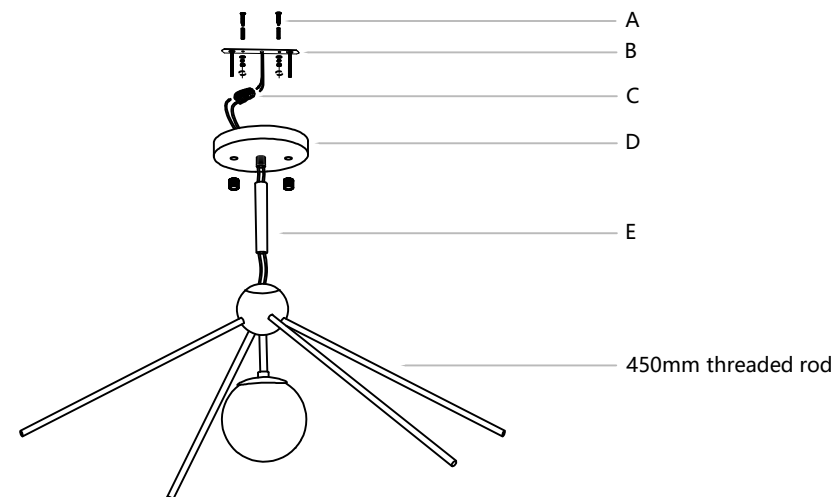

First, assemble the lamp arm brackets together. Then connect the wires according to the color and pass them through the threaded rod (E), then insert them into the top cover. Next, remove the circular piece (F) on the lamp head and put it into the glass cover (G), and then tighten them. Then fix the screws with nails (A) on the ceiling, and then fix the mounting plate (B) on the ceiling. Then connect the wires on the top cover (D) to the terminal block (C) on the ceiling. Finally, fix the top cover (D) on the mounting plate (B).


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

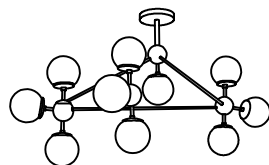


Product style diagram


Steps of installation

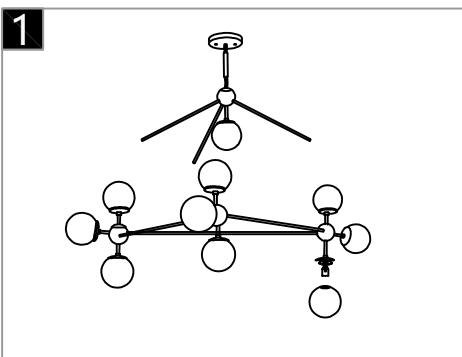


First, assemble the lamp arm brackets together. Then, connect the wires by color and pass them through the threaded rod before inserting them into the top cover.

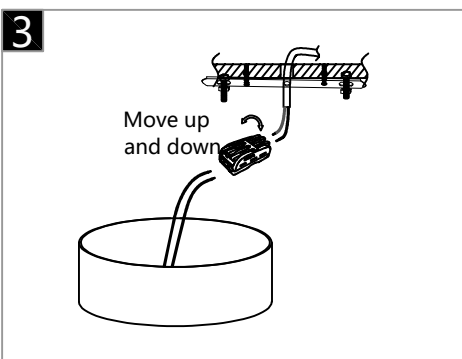


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

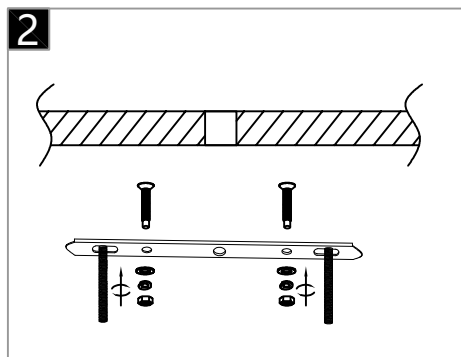

First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

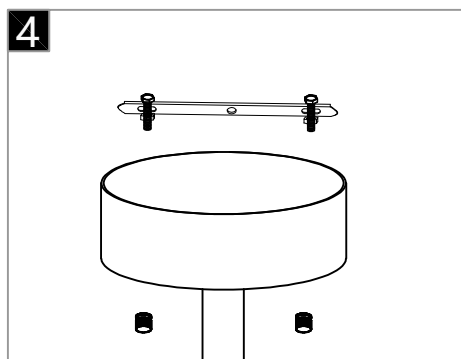

Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

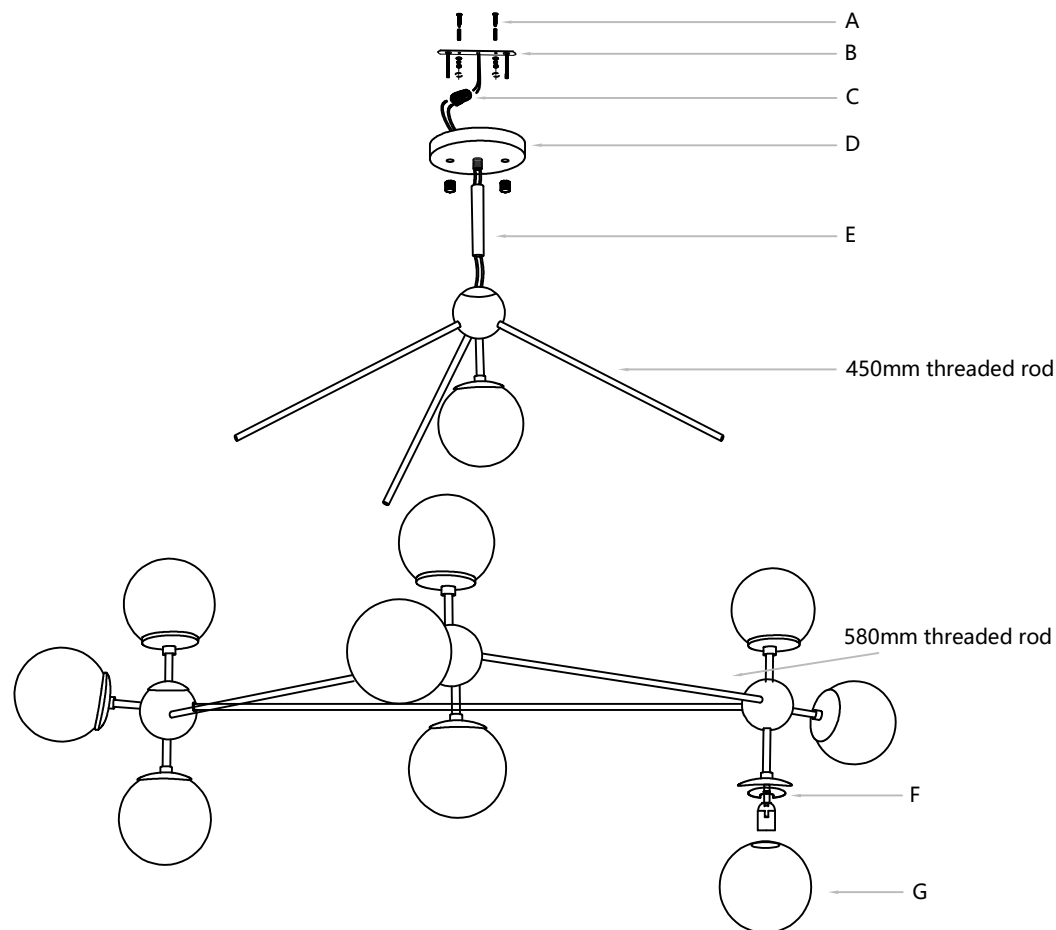

First, assemble the lamp arm brackets together. Then connect the wires according to the color and pass them through the threaded rod (E), then insert them into the top cover. Next, remove the circular piece (F) on the lamp head and put it into the glass cover (G), and then tighten them. Then fix the screws with nails (A) on the ceiling, and then fix the mounting plate (B) on the ceiling. Then connect the wires on the top cover (D) to the terminal block (C) on the ceiling. Finally, fix the top cover (D) on the mounting plate (B).