



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

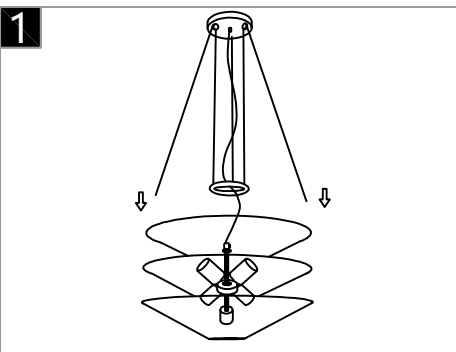


Pass the steel wire on the ring through the pulley on the top cover and then attach it to the lampshade. Then install the lampshade with the bracket onto the lamp body screw, and finally fix it in place.

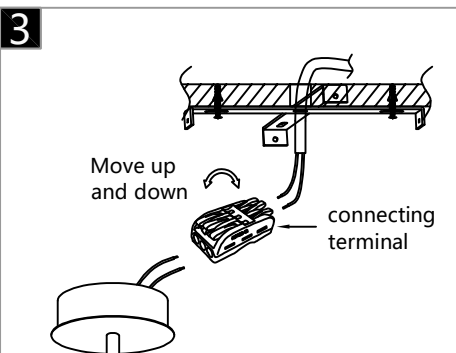


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

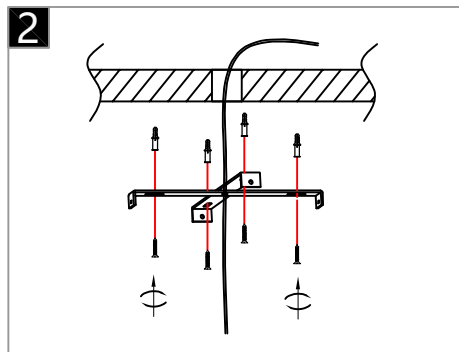

Attach the mounting plate to the ceiling with self-tapping screws.

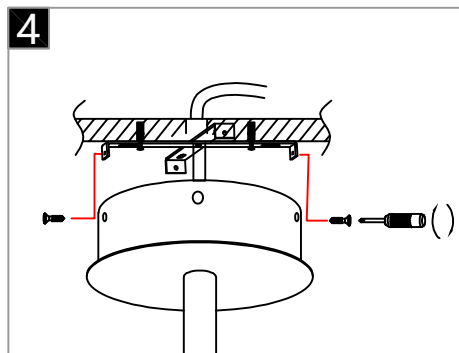

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

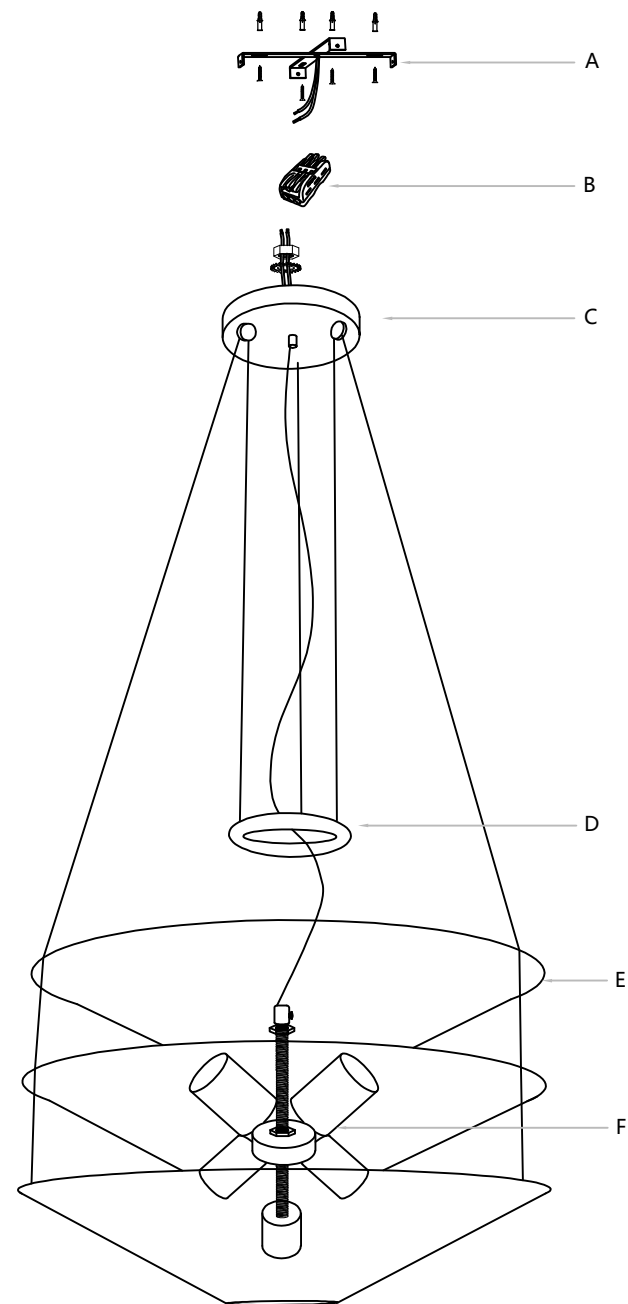

Pass the steel wire on the ring (D) through the pulley on the top cover (C), then install it onto the lampshade (E), and then install the lampshade (E) with the bracket onto the lamp body screw (F), and finally fix it in place. Fix the mounting plate (A) to the ceiling, then connect the wires reserved for the top cover (C) and the wires on the ceiling to the terminal (B), then align the hole position on the side of the top cover (C) with the hole position on the mounting plate (A), then tighten the screws,

Installation Instructions


WOMO®

Lighting

Model number: WM2775-75


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

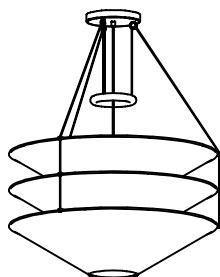


Product style diagram


Steps of installation

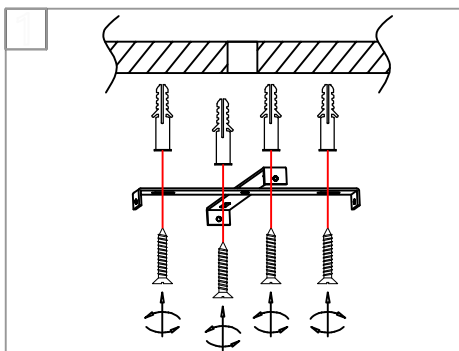


Install the mounting plate onto the ceiling.

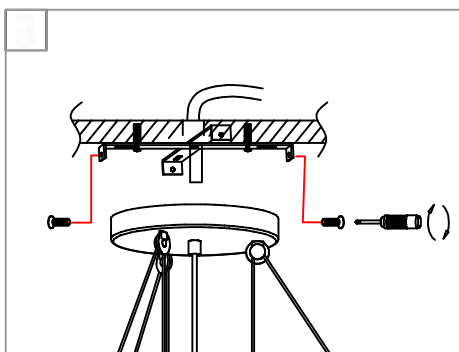


Align the holes of the disc with the threaded rod of the mounting plate, and tighten the nut.

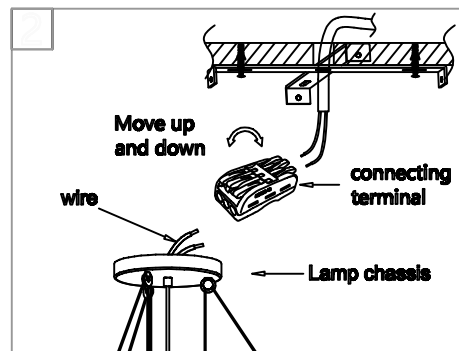

Use the quick connector to connect the wires of the top disc to the wires of the ceiling.

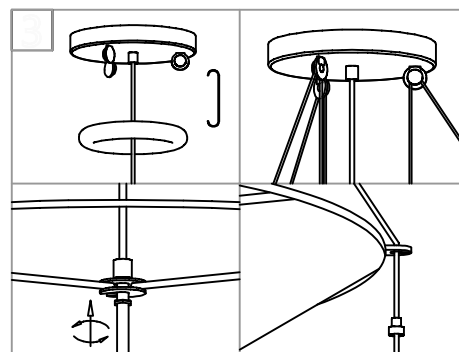

Use the auxiliary hook to hang the counterweight ring on the pulley, and then wind the steel wire rope out from the pulley, and put it into the groove of the outer ring of the lamp shade. Then, put the threaded rod of the lamp head body into the groove in the center of the lamp shade, and tighten the nut. Finally, install the bulb onto the lamp head body, and put the outer ring grooves of the lamp shades into the limiters of the steel wire rope.

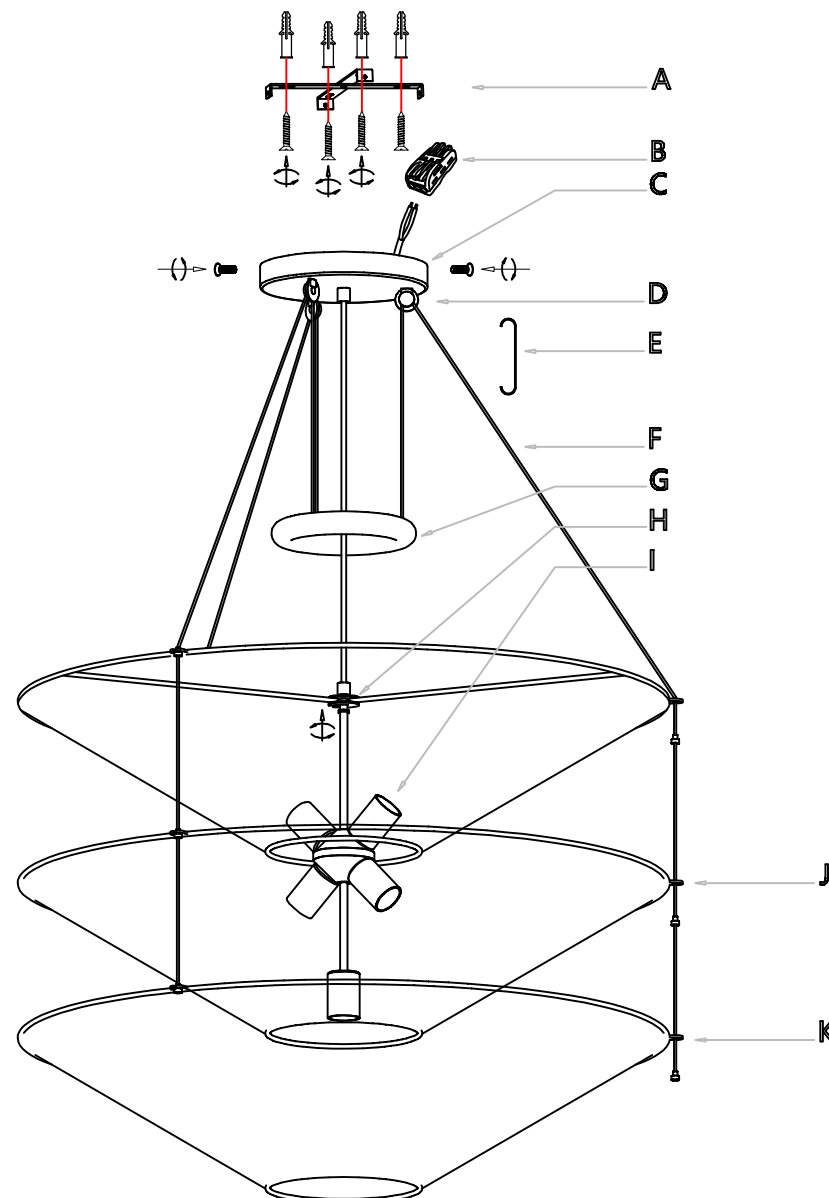

First, pass the wires of the lamp head body (I) through the locking mechanism of the counterweight ring (G) and the disc (C), adjust the length, and tighten the screws. Then, install the mounting plate (A) onto the ceiling. Next, use the quick connector (B) to connect the wires of the top disc (C) to the wires of the ceiling. Then, align the holes of the top disc (C) with the threaded rod of the mounting plate (A), and tighten the nut. Then, use the auxiliary hook (E) to hang the counterweight ring (G) on the pulley (D), and then wind the steel wire rope (F) out from the pulley (D), and put it into the groove of the outer ring of the lamp shade (H). Then, put the threaded rod of the lamp head body (I) into the groove in the center of the lamp shade (H), and tighten the nut. Finally, install the bulb onto the lamp head body (I), and put the outer ring grooves of the lamp shades (J) and (K) into the limiters of the steel wire rope (F).