



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

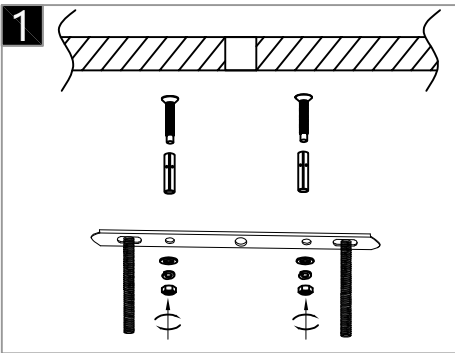


Fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

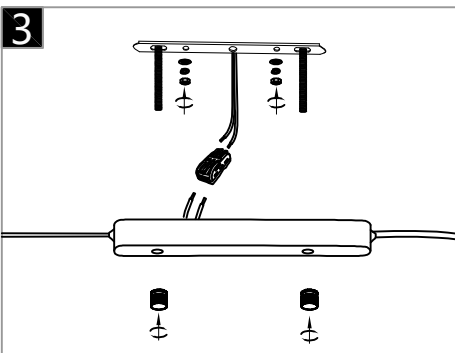


Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

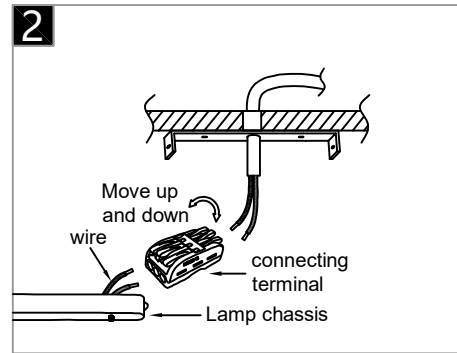

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

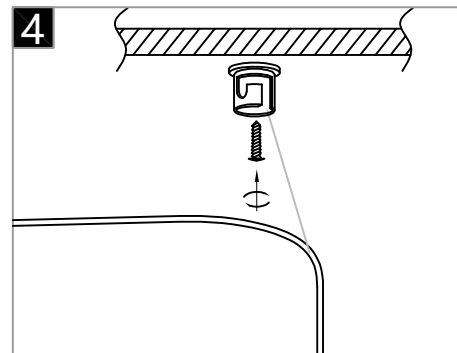


Measure the distance between the wires of the chandelier and install the wire locator on the ceiling according to the measured distance. Then insert the wires into the grooves.

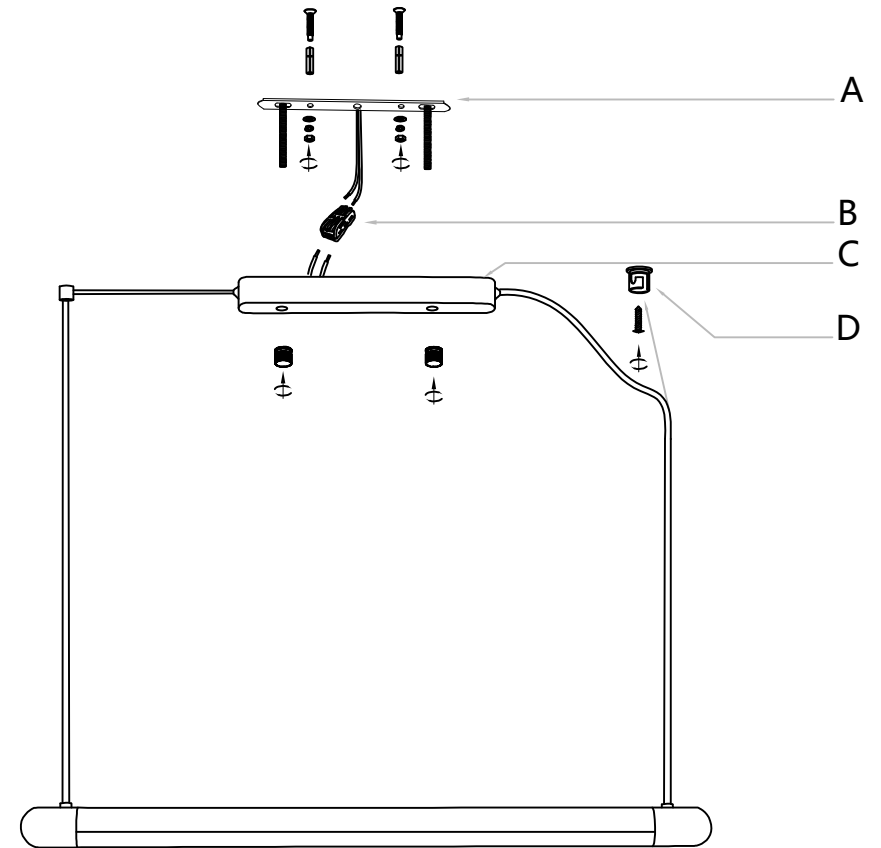

First, fix the mounting plate (A) to the ceiling. Next, using the terminal blocks (B), connect the wires of the top cover (C) to the wires on the ceiling. Then, align the holes on the top cover (C) with the threaded columns on the mounting plate (A), and tighten the nuts. Afterwards, measure the distance between the wires of the chandelier and install the wire locator (D) on the ceiling according to the measured distance. Then insert the wires into the grooves.

Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.



Product style diagram


Steps of installation

1

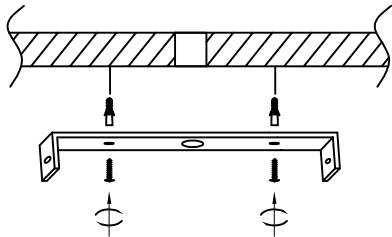


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

2

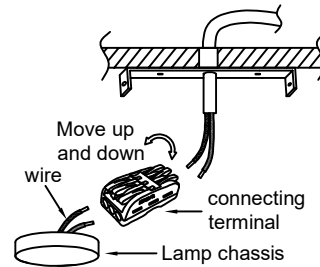


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

3

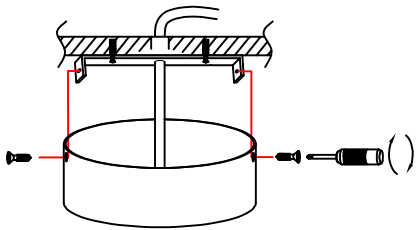

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

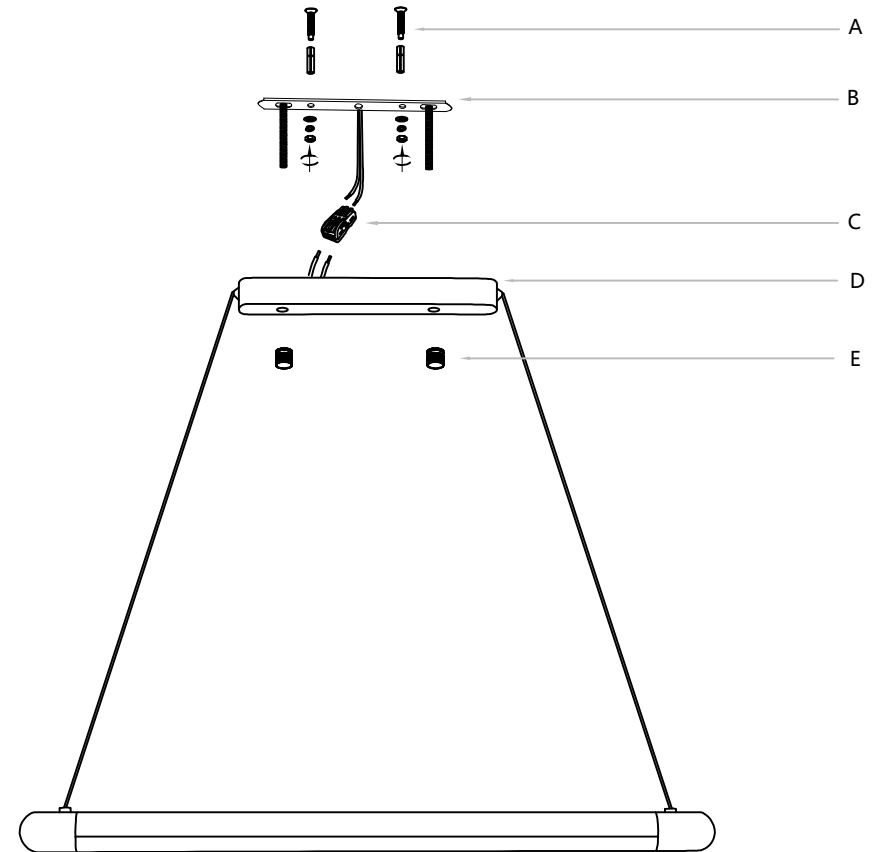

Put the iron pin into the iron sleeve (A), then drive it into the ceiling. Next, fix the mounting plate (B) to the ceiling. Then connect the reserved wires on the top cover (D) to the terminal block (C) on the ceiling. After that, align the bottom hole of the top cover (D) with the screws on the mounting plate (B), and then tighten it with a wing nut (E).