


Installation Instructions

WOMO Lighting

Model number: WM2042-3


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

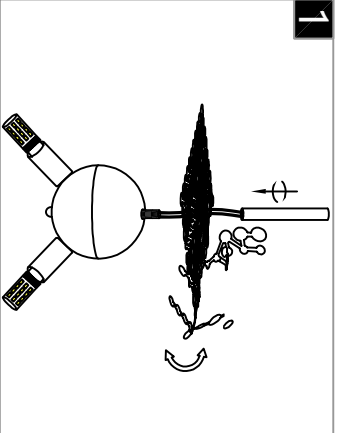


Pass the wire through the circular holes of the three metal decorative plates (A), then pass the wire through the connecting tube (G), and install the tube onto the threaded tube of the sphere (I). Next, install the bulb onto the lamp head of the sphere, and twist the three metal decorative plates in different directions to form the desired shape.

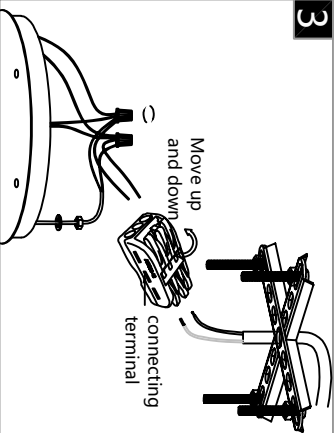


Use the quick connector cap to connect the wire into two groups with two extension cords, and use the quick connector to connect the two extension cords with the wires on the ceiling.

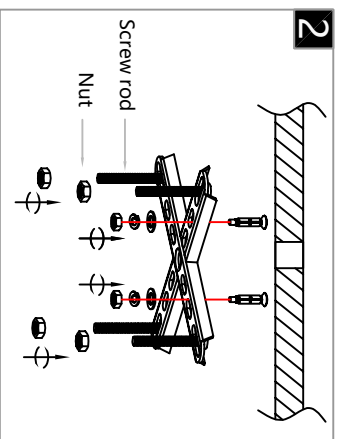

Pass the threaded rod through the rectangular holes on the outermost part of the mounting plate, fix it with a nut, and then install the mounting plate onto the ceiling.

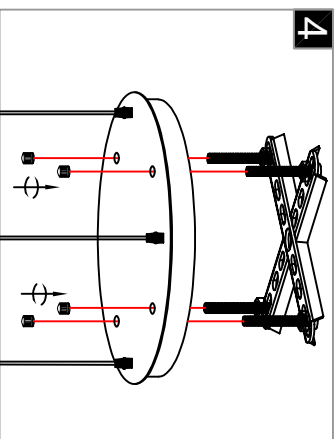

Align the holes on the disc with the screw rods on the mounting plate, and use the nut to lock it.

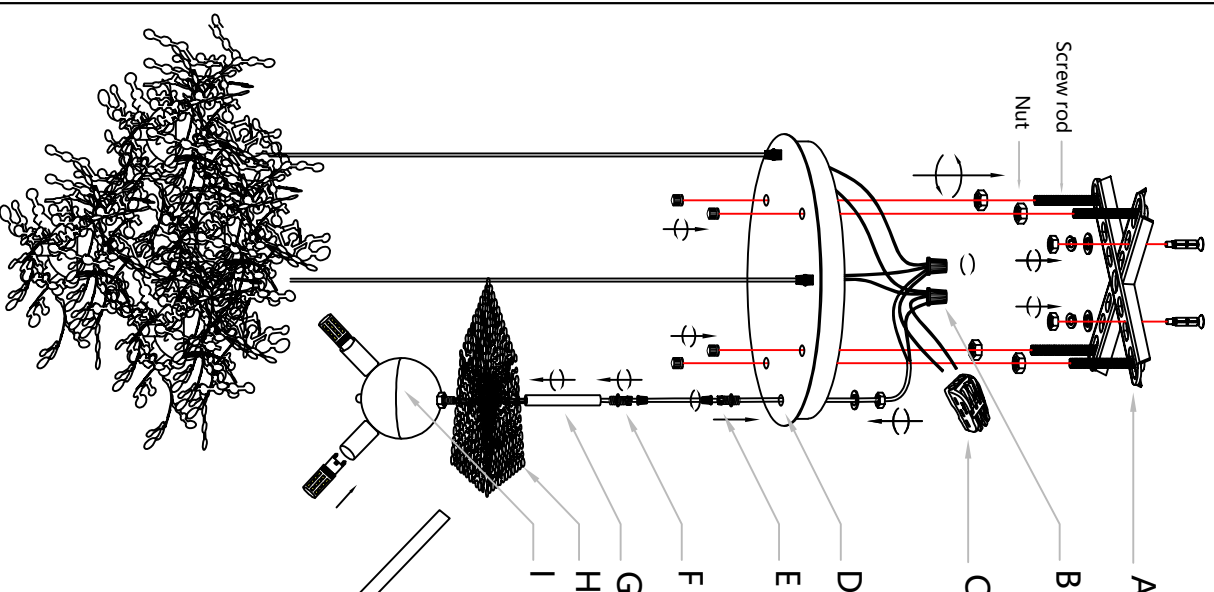

First, pass the wire through the circular holes of the three metal decorative plates (A), then pass the wire through the connecting tube (G), and install the tube (G) onto the threaded tube of the sphere (I).

Next, install the bulb onto the lamp head of the sphere (I), and twist the three metal decorative plates (A) in different directions to form the desired shape.

Then, pass the wire through the two sets of wire fixers (F), one set installed onto the connecting tube (G), and the other set installed onto the disc (D).

Next, pass the threaded rod through the rectangular holes on the outermost part of the mounting plate (A), fix it with a nut, and then install the mounting plate (A) onto the ceiling. Then, use the quick connector cap to connect the wire into two groups with two extension cords, and use the quick connector (C) to connect the two extension cords with the wires on the ceiling.

Finally, align the holes on the disc (D) with the screw rods on the mounting plate (A), and use the nut to lock it.

