



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

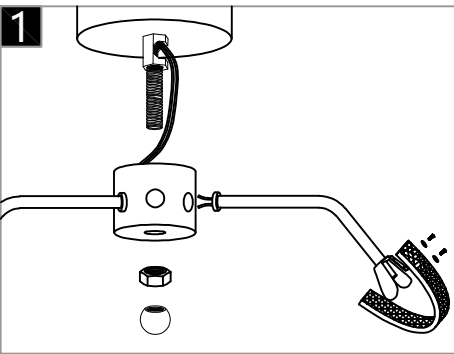


Install the lamp wall bracket onto the bottom cover, then connect the wires together by color, then pass them through the connector nuts and fix them onto the top cover. Finally, install the U-shaped glass sheet onto the lamp arm bracket.

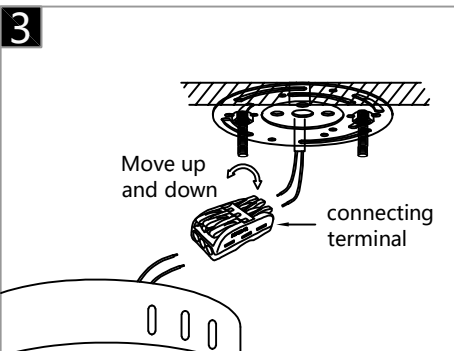


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

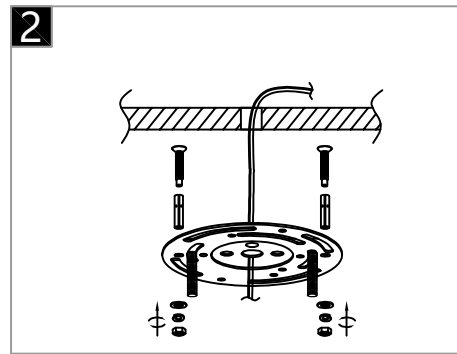

fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

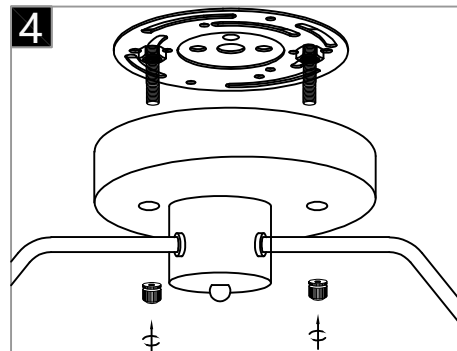


Align the top cover hole position on the luminaire with the screws on the mounting plate and then secure from the bottom using the nut.

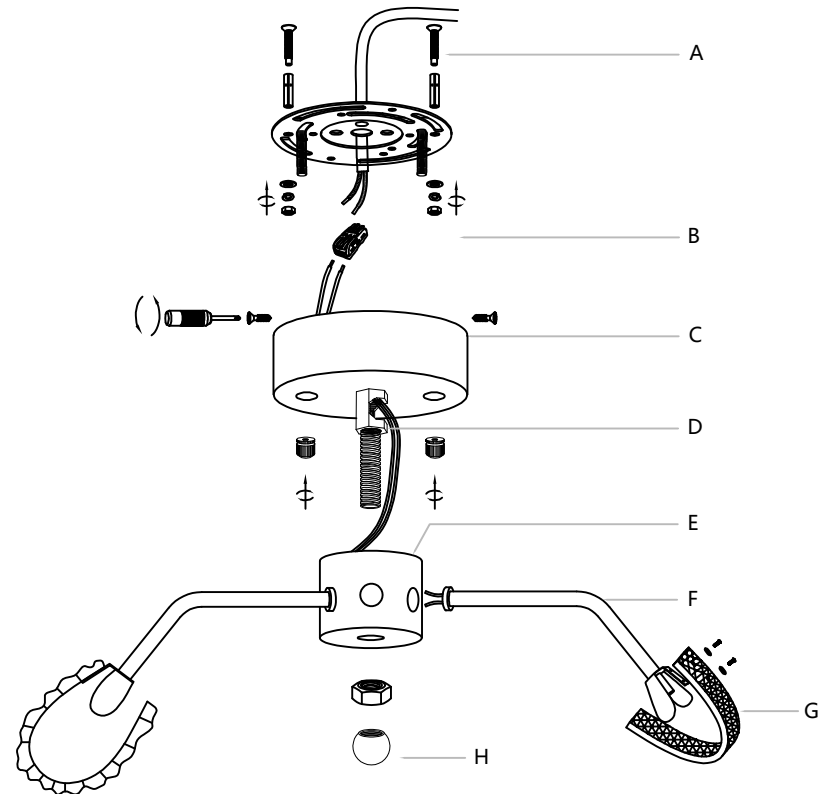

Install the lamp base bracket (F) onto the bottom cover (E), then connect the wires together by color, and pass them through the connector nut (D) and secure them onto the top cover (C). Then, tighten the bottom cover (E) with the head nut (H). Finally, install the U-shaped glass sheet (G) onto the lamp arm bracket (F). Fix the screw (A) with an iron nail onto the ceiling, then fix the mounting plate (B) onto the ceiling, then connect the wires on the top cover (D) to the wiring terminals (C) on the ceiling, and finally fix the top cover (D) onto the mounting plate (B).


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

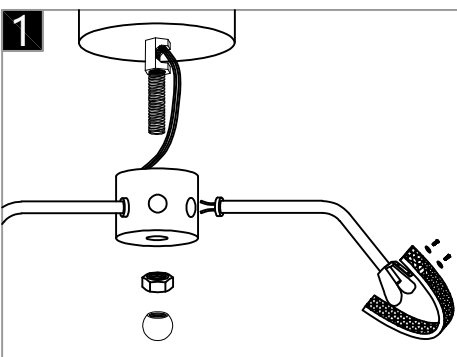


Install the lamp wall bracket onto the bottom cover, then connect the wires together by color, then pass them through the connector nuts and fix them onto the top cover. Finally, install the U-shaped glass sheet onto the lamp arm bracket.

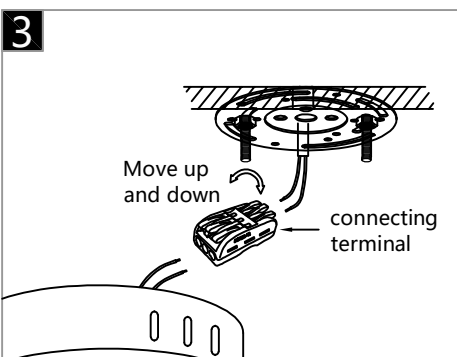


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

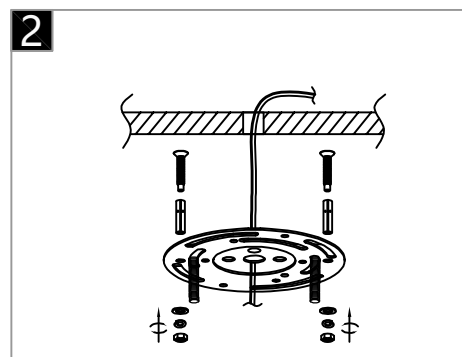

fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

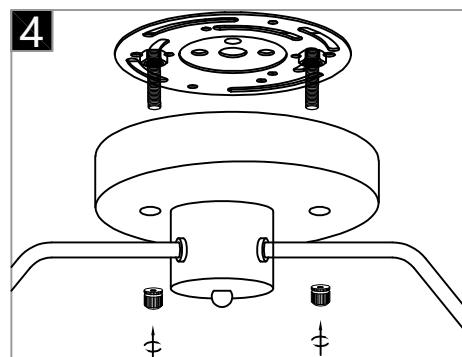

Align the top cover hole position on the luminaire with the screws on the mounting plate and then secure from the bottom using the nut.

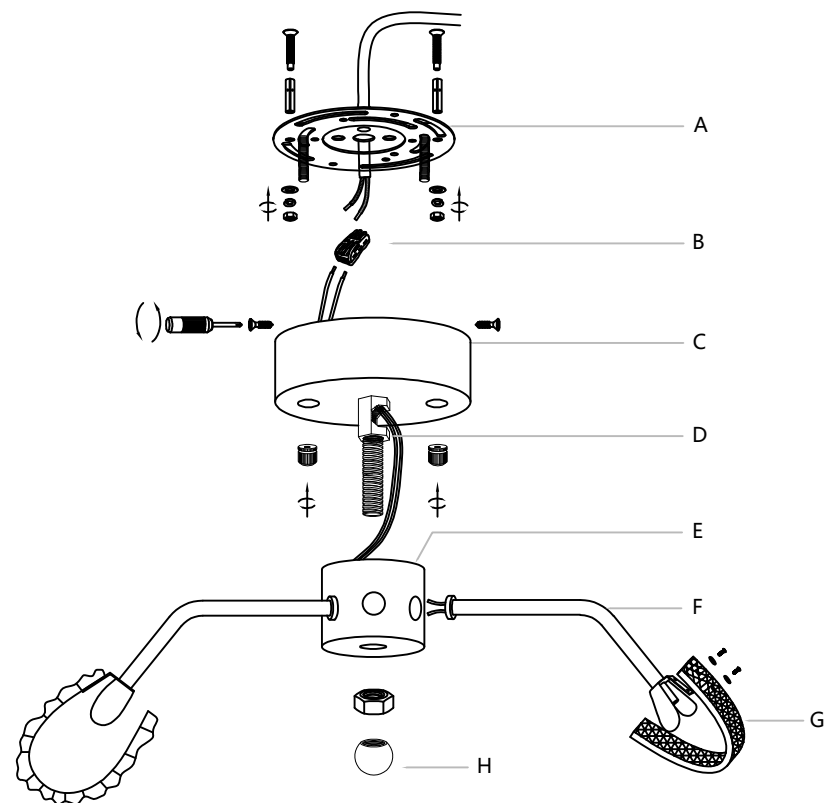

Install the lamp base bracket (F) onto the bottom cover (E), then connect the wires by color and pass them through the connection nut (D) and fix them onto the top cover (C). Next, tighten the bottom cover (E) with the head nut (H). Finally, install the U-shaped glass sheet (G) onto the lamp arm bracket (F), then fix the mounting plate (A) to the ceiling, then connect the wires on the top cover (C) to the wiring terminals (B) on the ceiling, and finally fix the top cover (C) onto the mounting plate (A), and then tighten it with a nut.