



### Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


### Steps of installation

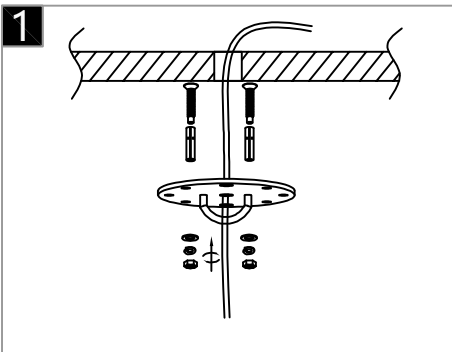


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

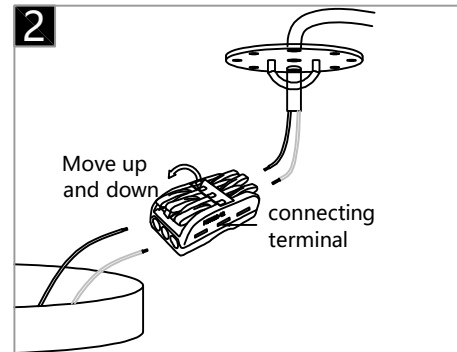

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

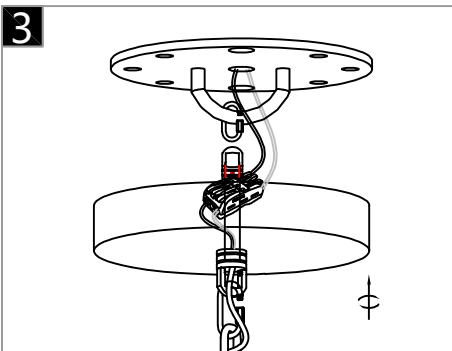


Lock the clasp to the hook on the lamp cover and mounting plate, then tighten the screws

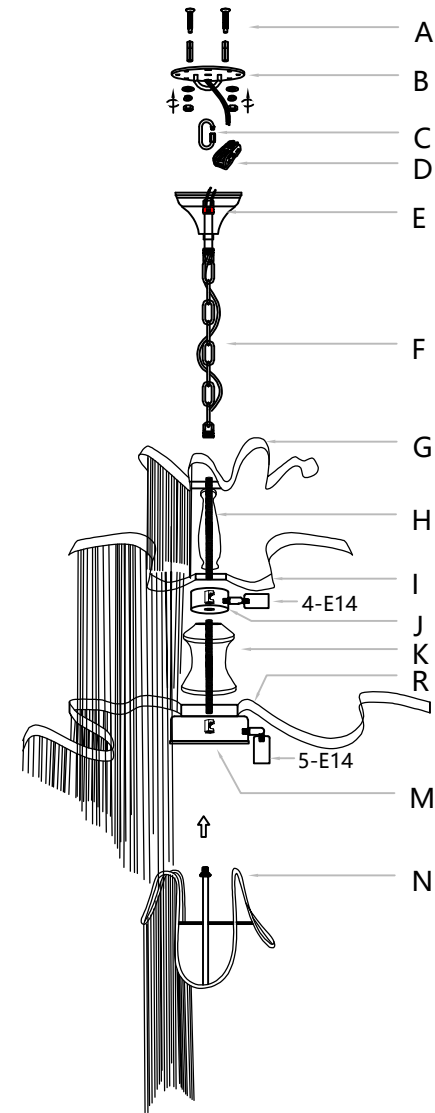

Fix the lamp head onto the lamp base (M) with eight holes, then screw the chain lamp arm (N) onto the lamp base (M), followed by placing the chain lamp arm (R) on the lamp base (M), then use the lower middle column (K) to screw onto the lamp base (M), then fix the lamp head onto the lamp base (J) with four holes, then fix it above the lower middle column (K), then place the chain lamp arm (I) on the lamp base (J), then screw the upper middle column (H) on, finally install the chain lamp arm (G), then screw the chain (F) onto the screw of the upper middle column (H), insert the nail into the screw (A), and then screw it into the ceiling. Next, use screws and washers to fix the mounting plate (B) onto the screws on the ceiling. Then, pass the wires through the reserved openings on the chain (F) and the top cover (E). Then, fix the safety button (C) on the top cover (E) so that it hangs on the hook of the mounting plate (B). Then, connect the wires on the top cover (E) and the wires on the ceiling to the junction box (D). Finally, lift the top cover (E) up and tighten the bottom screws.


### Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

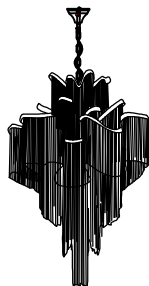


Product style diagram


### Steps of installation

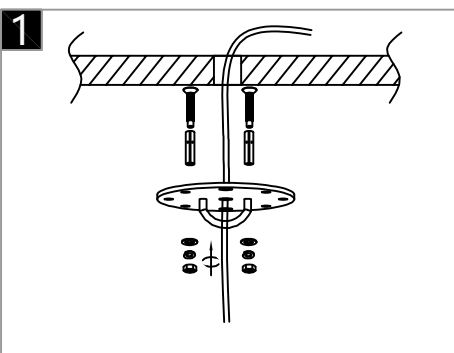


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

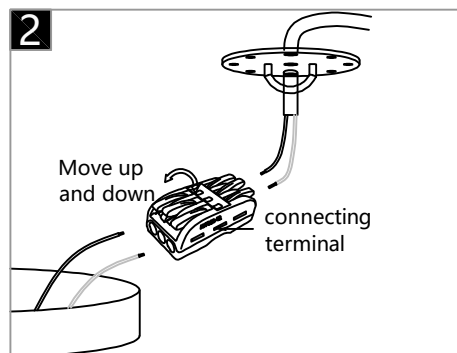

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

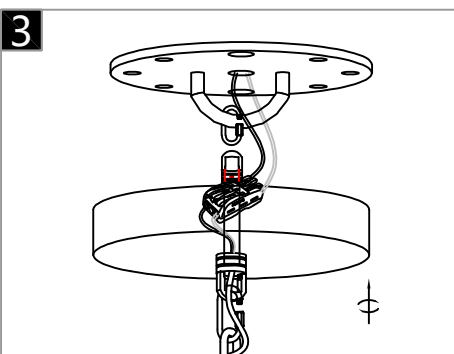


Lock the clasp to the hook on the lamp cover and mounting plate, then tighten the screws

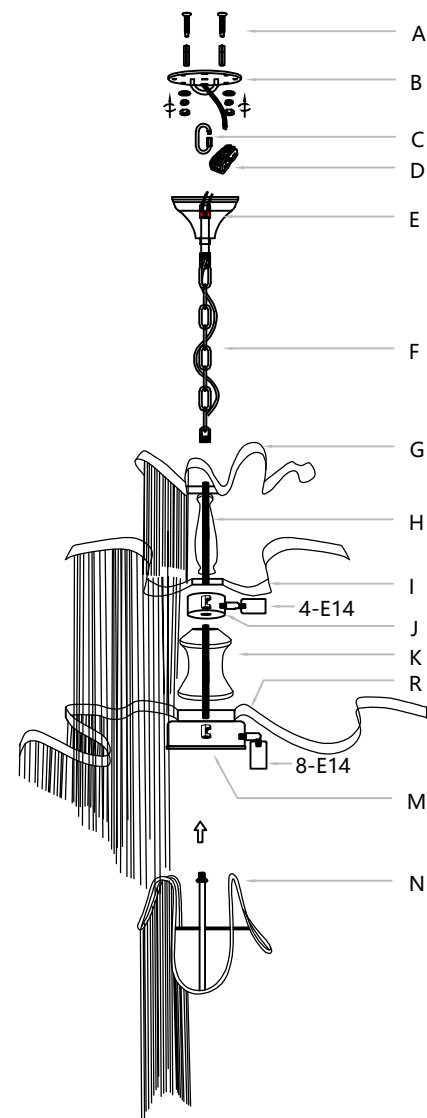

Fix the lamp head onto the lamp base (M) with eight holes, then screw the chain lamp arm (N) onto the lamp base (M), followed by placing the chain lamp arm (R) on the lamp base (M), then use the lower middle column (K) to screw onto the lamp base (M), then fix the lamp head onto the lamp base (J) with four holes, then fix it above the lower middle column (K), then place the chain lamp arm (I) on the lamp base (J), then screw the upper middle column (H) on, finally install the chain lamp arm (G), then screw the chain (F) onto the screw of the upper middle column (H), insert the nail into the screw (A), and then screw it into the ceiling. Next, use screws and washers to fix the mounting plate (B) onto the screws on the ceiling. Then, pass the wires through the reserved openings on the chain (F) and the top cover (E). Then, fix the safety button (C) on the top cover (E) so that it hangs on the hook of the mounting plate (B). Then, connect the wires on the top cover (E) and the wires on the ceiling to the junction box (D). Finally, lift the top cover (E) up and tighten the bottom screws.


### Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

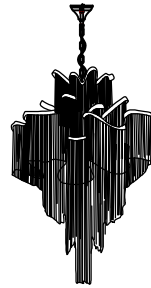


Product style diagram


### Steps of installation

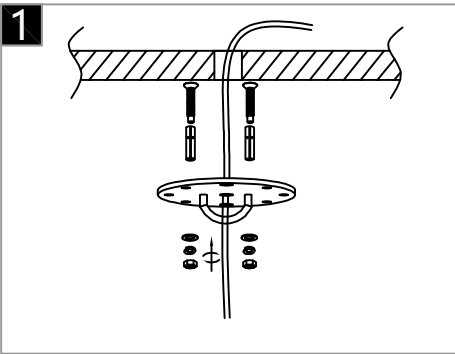


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

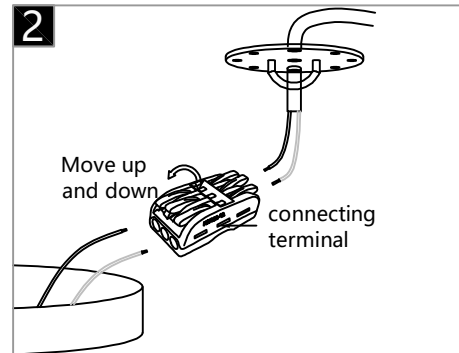

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

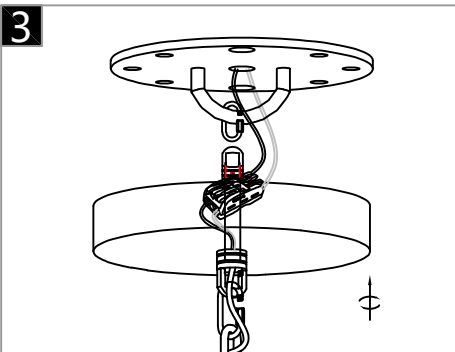

Lock the clasp to the hook on the lamp cover and mounting plate, then tighten the screws

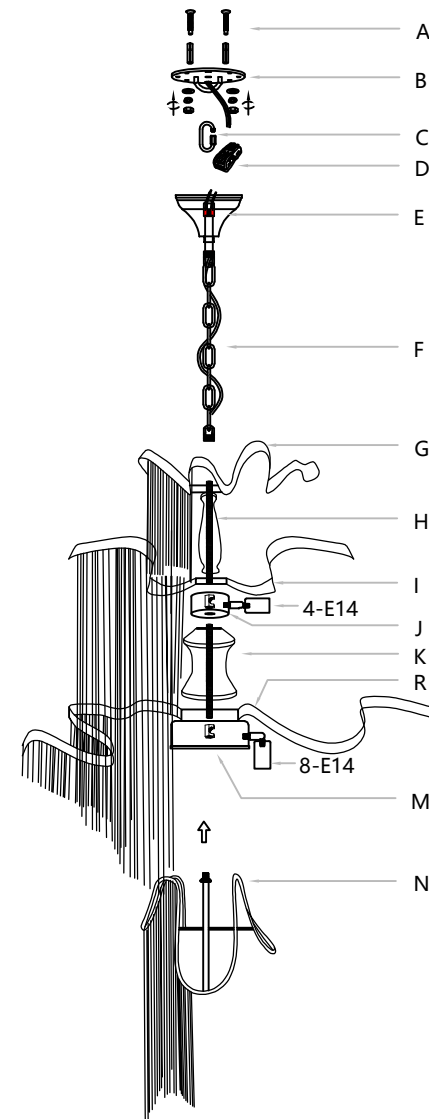

Fix the lamp head onto the lamp base (M) with eight holes, then screw the chain lamp arm (N) onto the lamp base (M), followed by placing the chain lamp arm (R) on the lamp base (M), then use the lower middle column (K) to screw onto the lamp base (M), then fix the lamp head onto the lamp base (J) with four holes, then fix it above the lower middle column (K), then place the chain lamp arm (I) on the lamp base (J), then screw the upper middle column (H) on, finally install the chain lamp arm (G), then screw the chain (F) onto the screw of the upper middle column (H), insert the nail into the screw (A), and then screw it into the ceiling. Next, use screws and washers to fix the mounting plate (B) onto the screws on the ceiling. Then, pass the wires through the reserved openings on the chain (F) and the top cover (E). Then, fix the safety button (C) on the top cover (E) so that it hangs on the hook of the mounting plate (B). Then, connect the wires on the top cover (E) and the wires on the ceiling to the junction box (D). Finally, lift the top cover (E) up and tighten the bottom screws.