



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

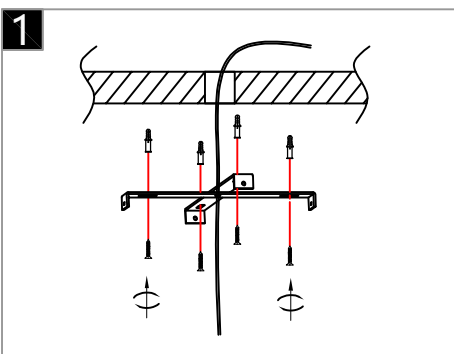


Attach the mounting plate to the ceiling with self-tapping screws.

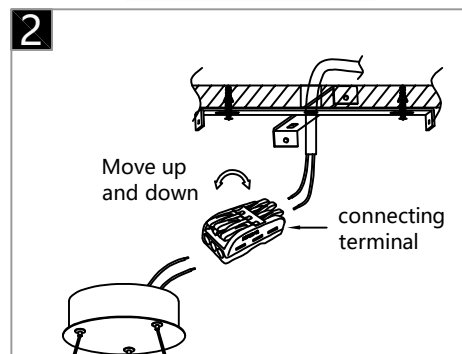

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

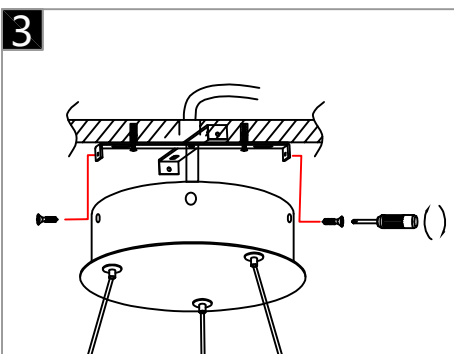


Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

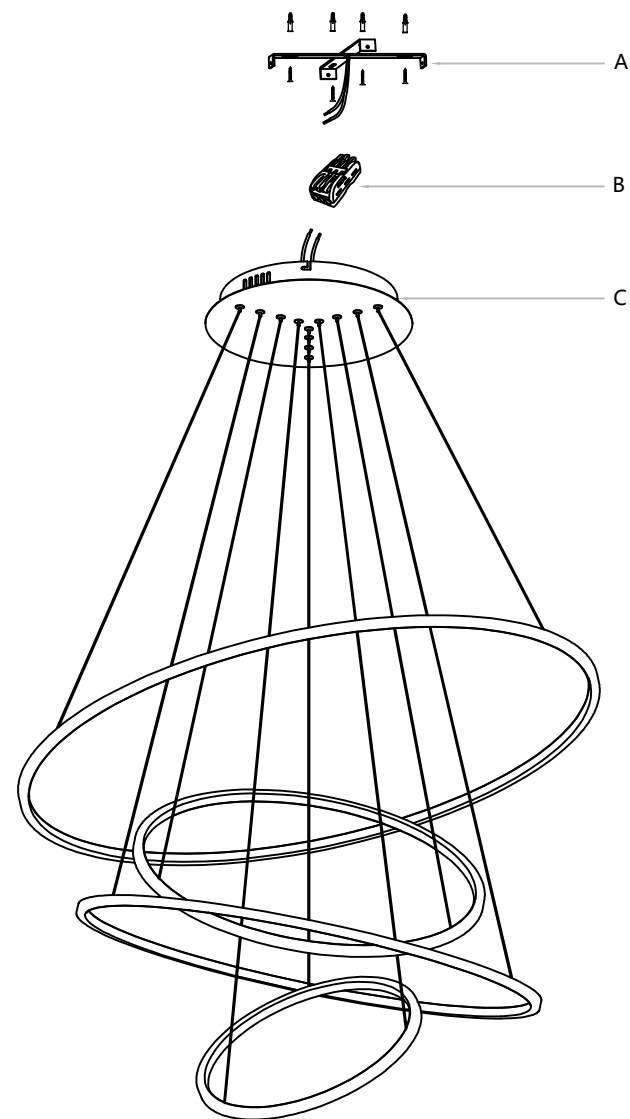

Fix the mounting plate (A) to the ceiling, then connect the wires reserved for the top cover (C) and the wires on the ceiling to the terminal (B), then align the hole position on the side of the top cover (C) with the hole position on the mounting plate (A), then tighten the screws,


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

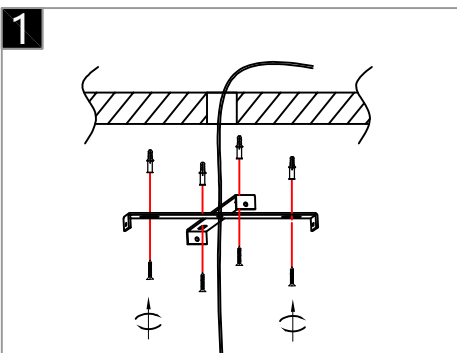


Fix the mounting plate to the wall.

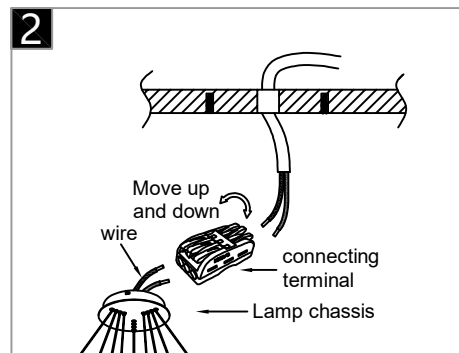

Connect the wires on the top cover to the wires on the ceiling and the terminal block.

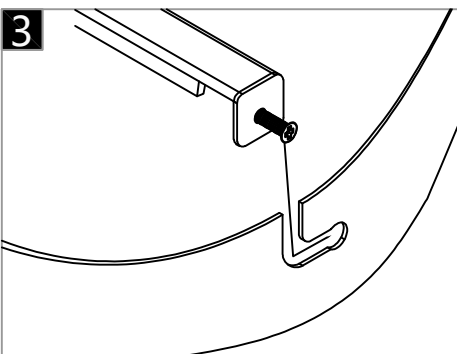


Then, align the holes on the lamp body (C) with the holes on the mounting plate (A), and tighten the screws.

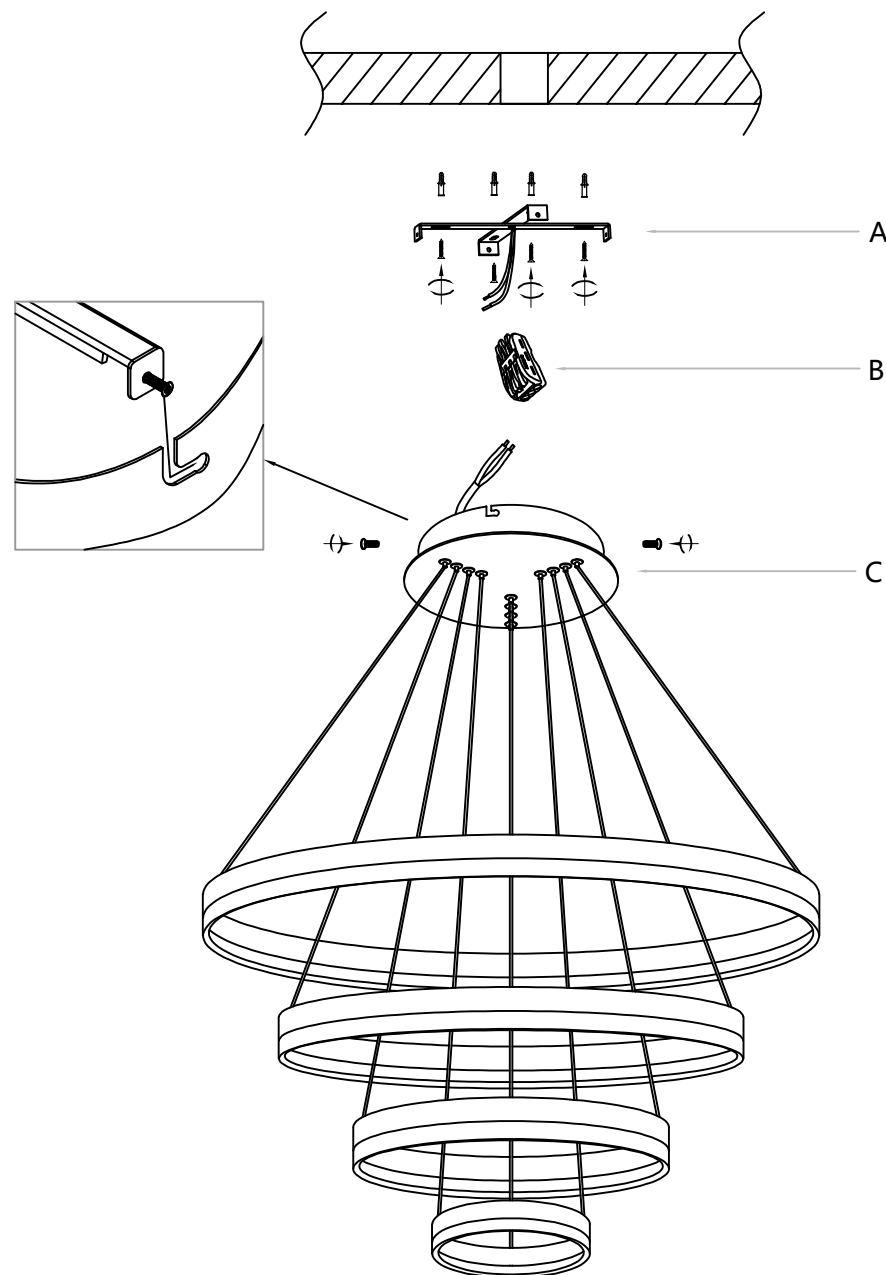

Fix the mounting plate (A) to the wall. Next, connect the wires of the lamp body (C) to the wires on the ceiling, then connect them to the terminal block (B). Then, align the holes on the lamp body (C) with the holes on the mounting plate (A), and tighten the screws.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

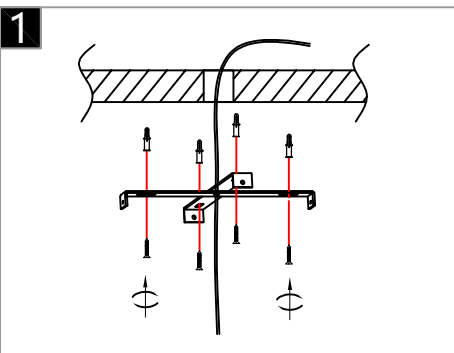


Attach the mounting plate to the ceiling with self-tapping screws.

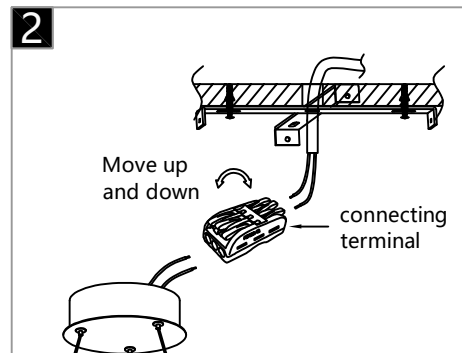

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

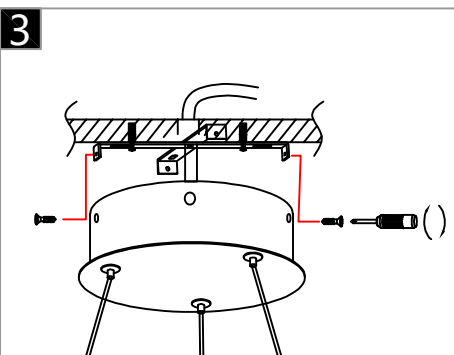


Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

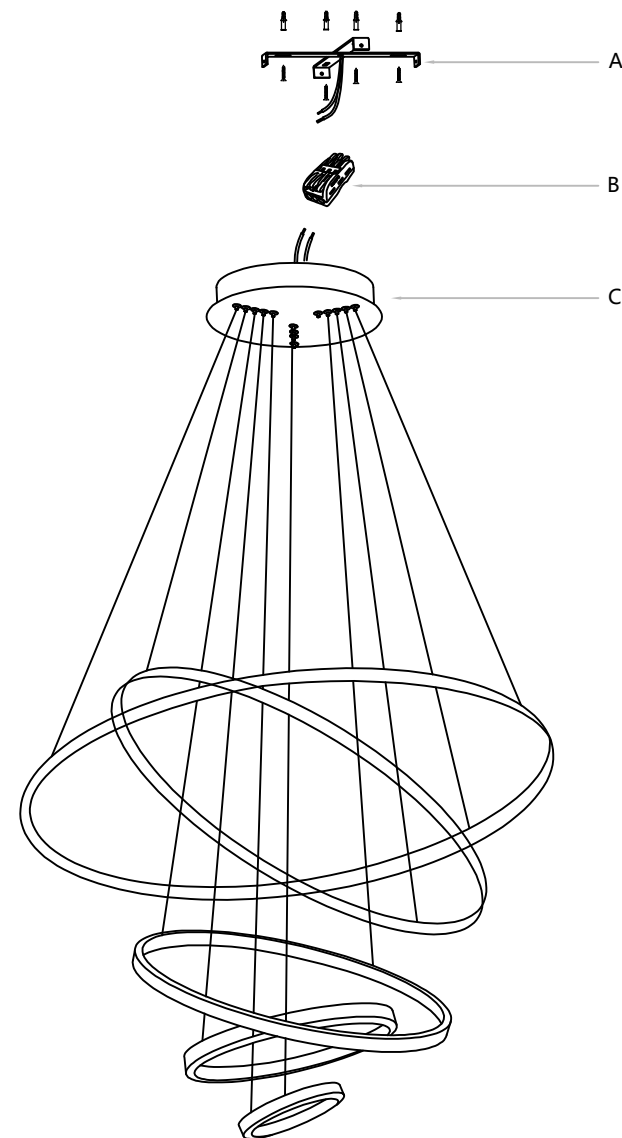

Fix the mounting plate (A) to the ceiling, then connect the wires reserved for the top cover (C) and the wires on the ceiling to the terminal (B), then align the hole position on the side of the top cover (C) with the hole position on the mounting plate (A), then tighten the screws,

Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.



Product style diagram


Steps of installation

1

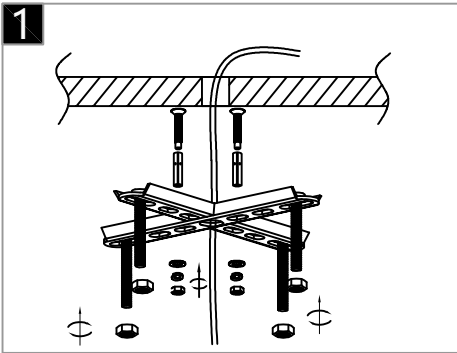


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

2

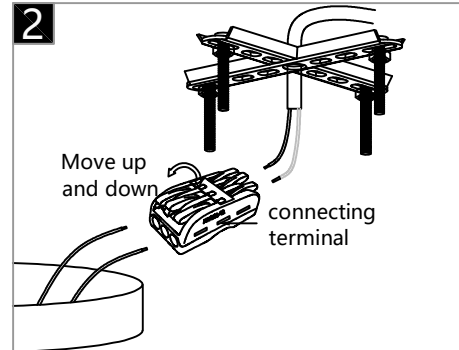


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

3

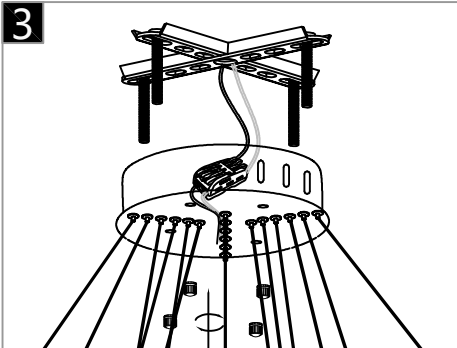

Align the top cover hole position on the luminaire with the screws on the mounting plate and then secure from the bottom using the nut.

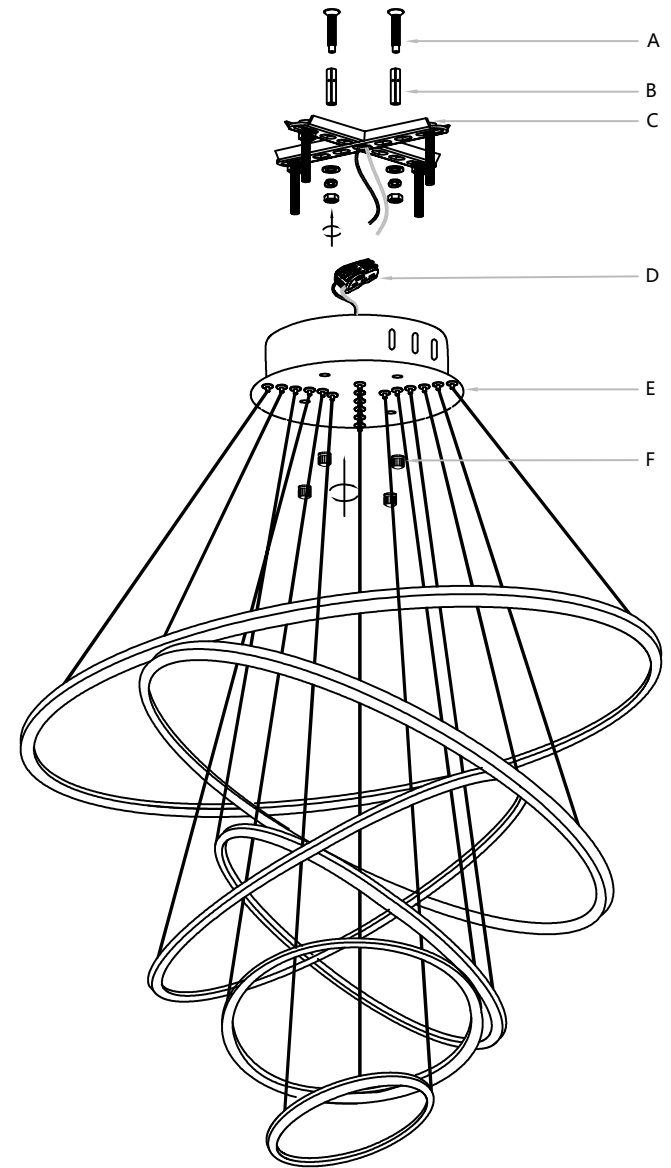

Then, insert the locating pin (B) on the expansion screw into the screw (A) and fix it on the ceiling. Next, align the holes on the mounting plate (C) with the screws and fix it with a nut. Then, connect the wires on the lamp body to the terminal block (D) and connect the wires on the ceiling to it. Then, align the hole positions on the top cover (E) with the screws on the mounting plate (C), and lock it with a wing nut (F).


Installation Instructions

WOMO Lighting

Model number: WM2159-7


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

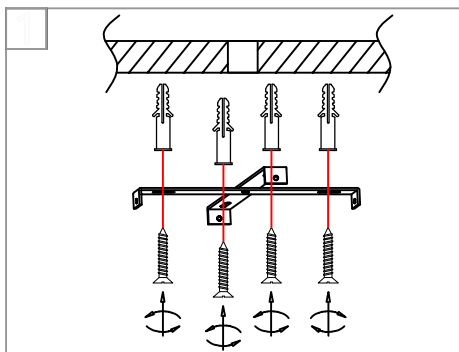


Attach the mounting plate to the ceiling with self-tapping screws .

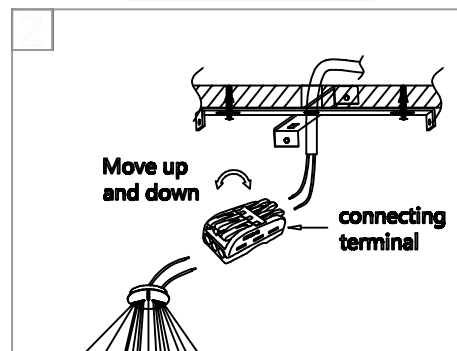

Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

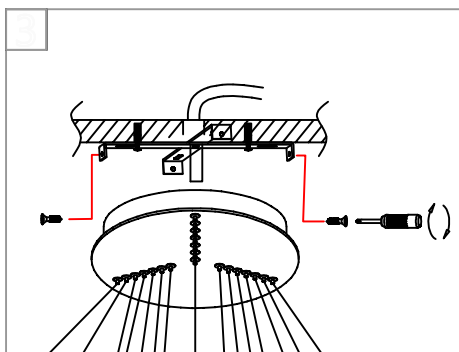

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

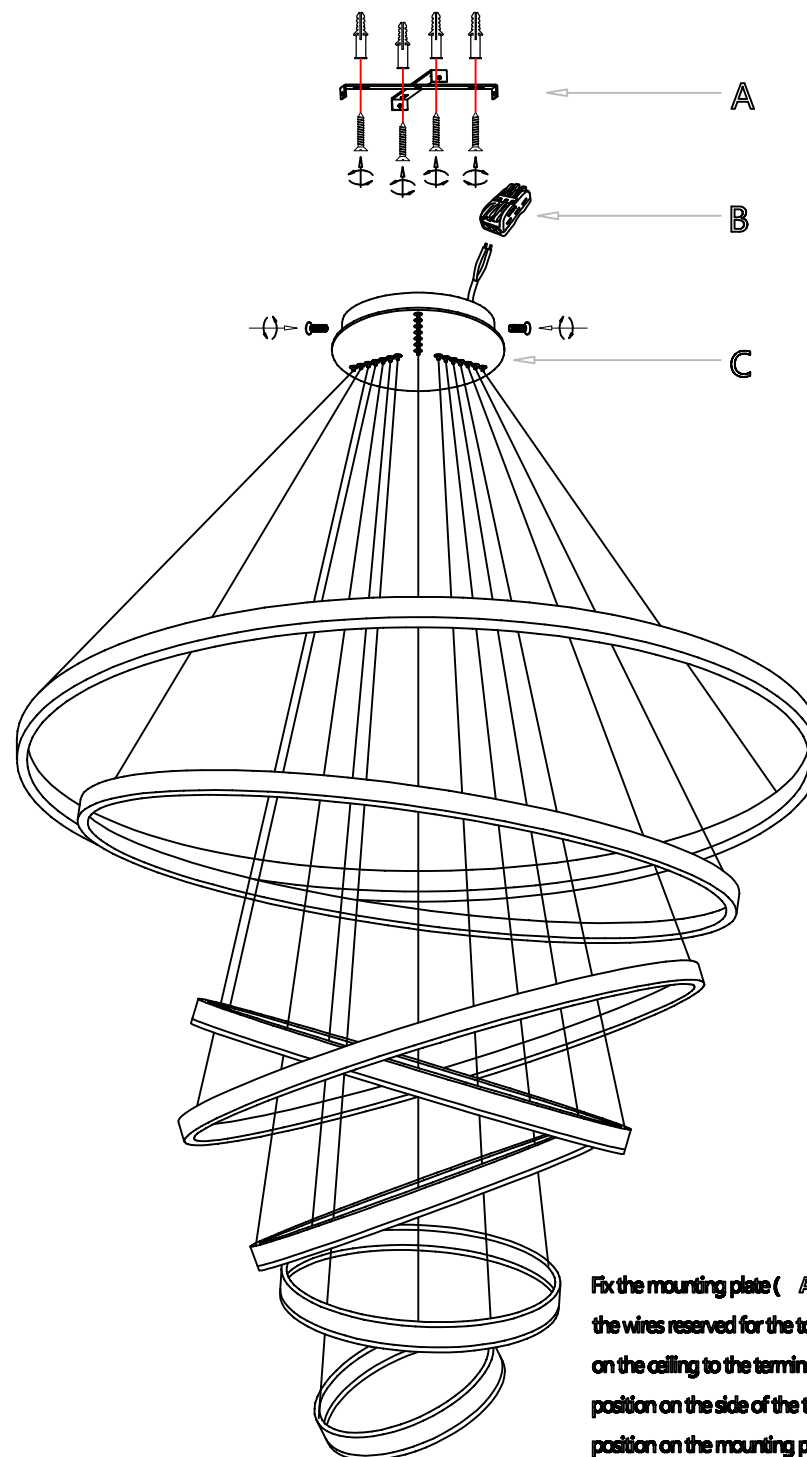

Fix the mounting plate (A) to the ceiling, then connect the wires reserved for the top cover (C) and the wires on the ceiling to the terminal (B), then align the hole position on the side of the top cover (C) with the hole position on the mounting plate (A), then tighten the screws,