


Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.



Product style diagram


Steps of installation

1

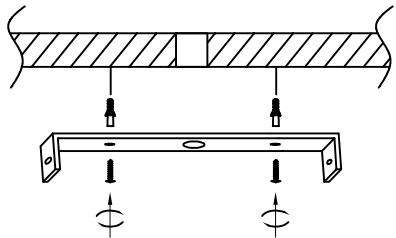


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

2

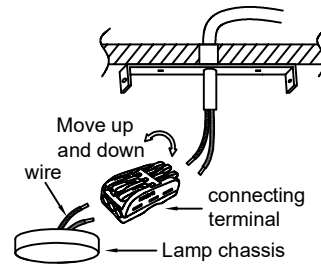


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

3


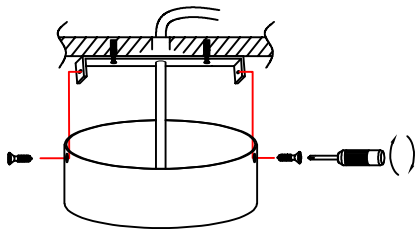


Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

4

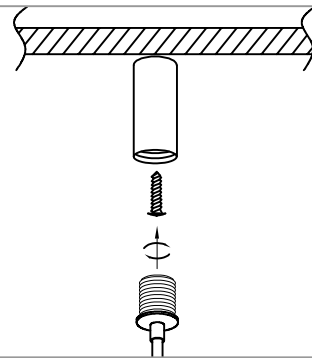


Place the iron pin at the desired Angle, then attach it to the ceiling with self-tapping screws, and then fasten it with locking wire Screw it on the iron pin.

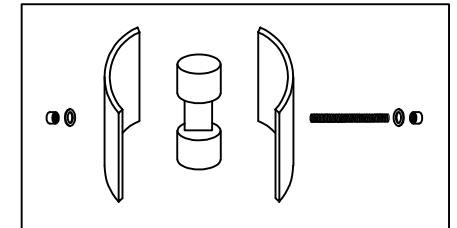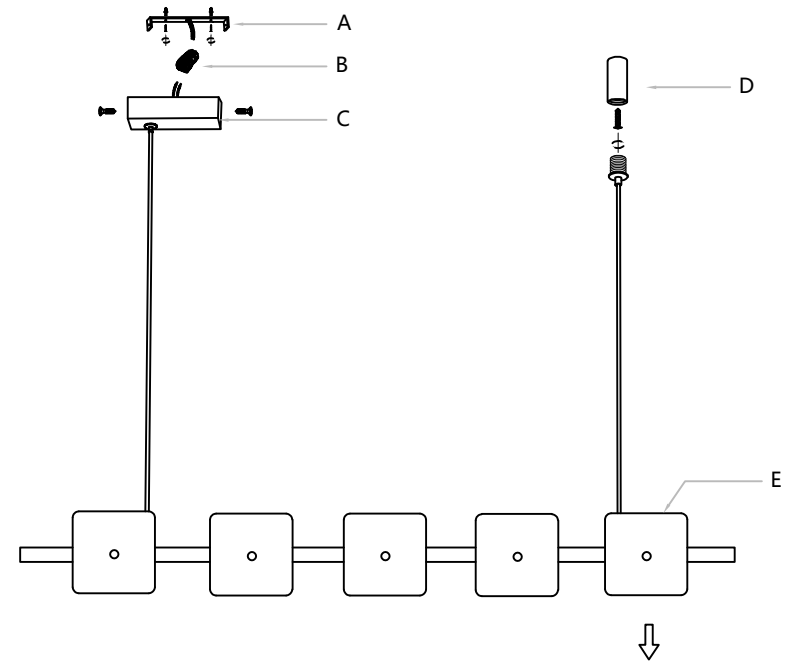

Place the iron nail (D) in the desired inclined position, then fix it to the ceiling using a self-tapping screw, and then secure it with a locking line. Tighten the screw onto the iron nail (D). Fix the mounting plate (A) to the ceiling. Then, pass the reserved wires through the decorative ring (E) and install them onto the top cover (C), then connect the reserved wires to the terminal block (B), and align the top cover holes with the mounting plate (A), and then secure it with screws, Finally, install the glass plate (E) onto the lamp stand.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

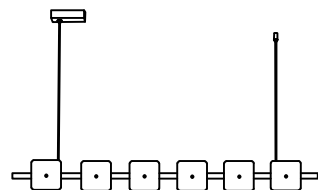


Product style diagram


Steps of installation

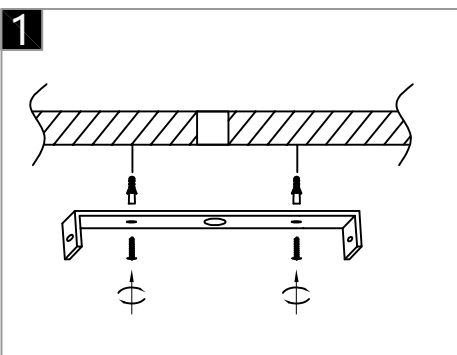


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

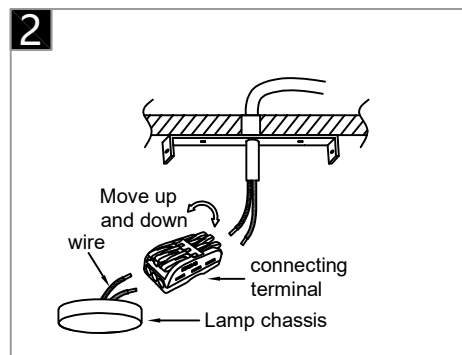


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

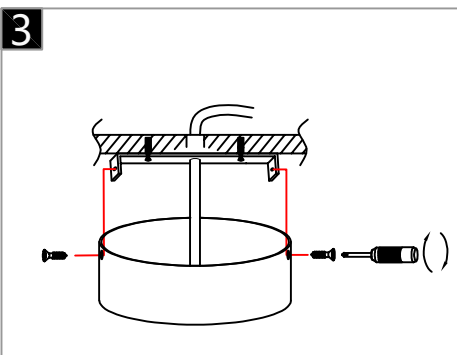

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

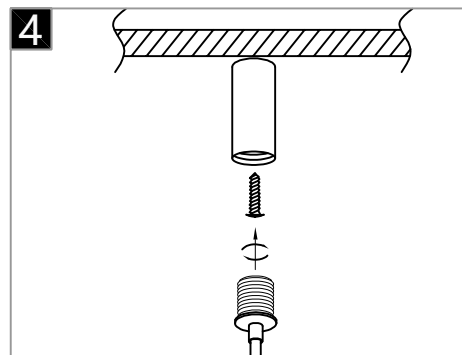


Place the iron pin at the desired Angle, then attach it to the ceiling with self-tapping screws, and then fasten it with locking wire. Screw it on the iron pin.

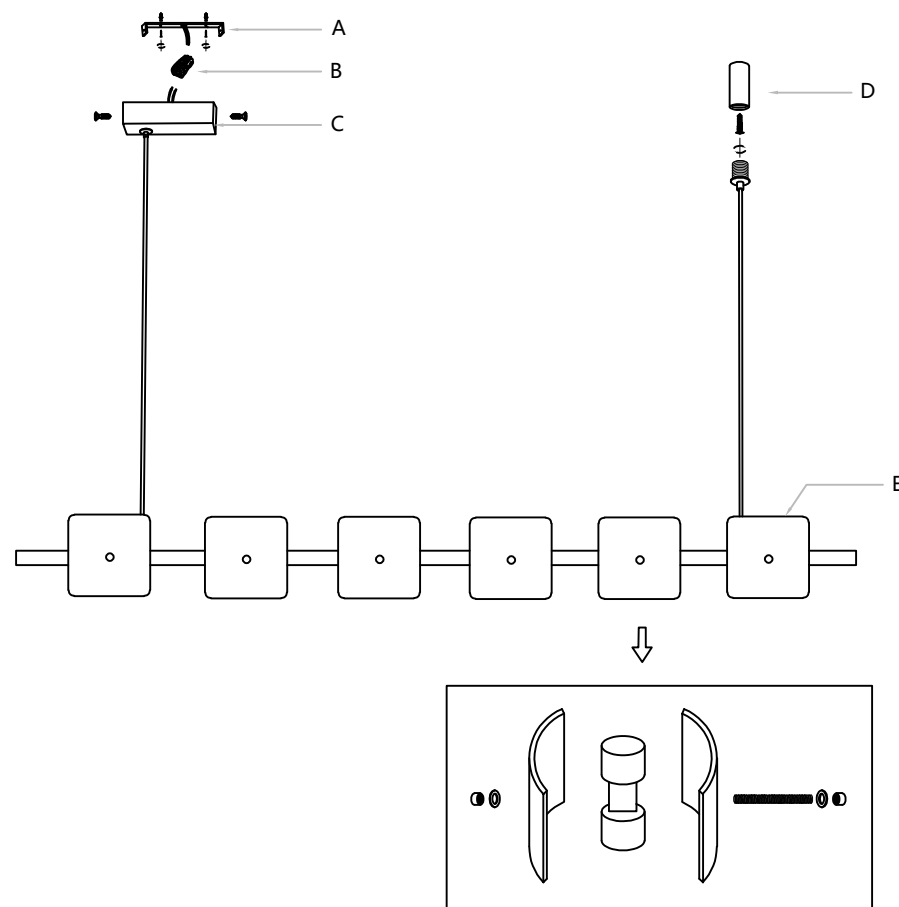

Place the iron nail (D) in the desired inclined position, then fix it to the ceiling using a self-tapping screw, and then secure it with a locking line. Tighten the screw onto the iron nail (D). Fix the mounting plate (A) to the ceiling. Then, pass the reserved wires through the decorative ring (E) and install them onto the top cover (C), then connect the reserved wires to the terminal block (B), and align the top cover holes with the mounting plate (A), and then secure it with screws. Finally, install the glass plate (E) onto the lamp stand.

Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

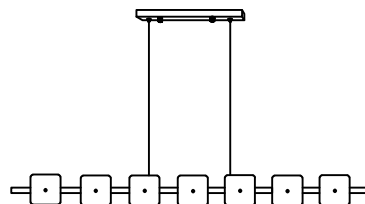

Product style diagram


Steps of installation

1

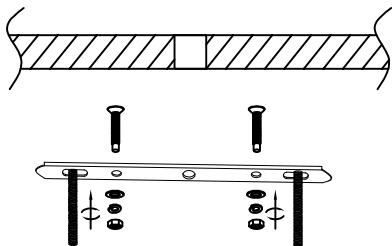


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

2

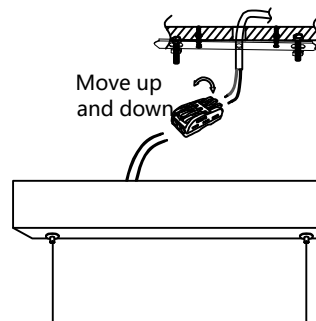


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

3

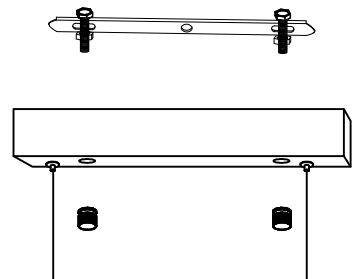


Align the bottom holes on the top cover with the screws on the mounting plate, and then tighten them with a wing nut.

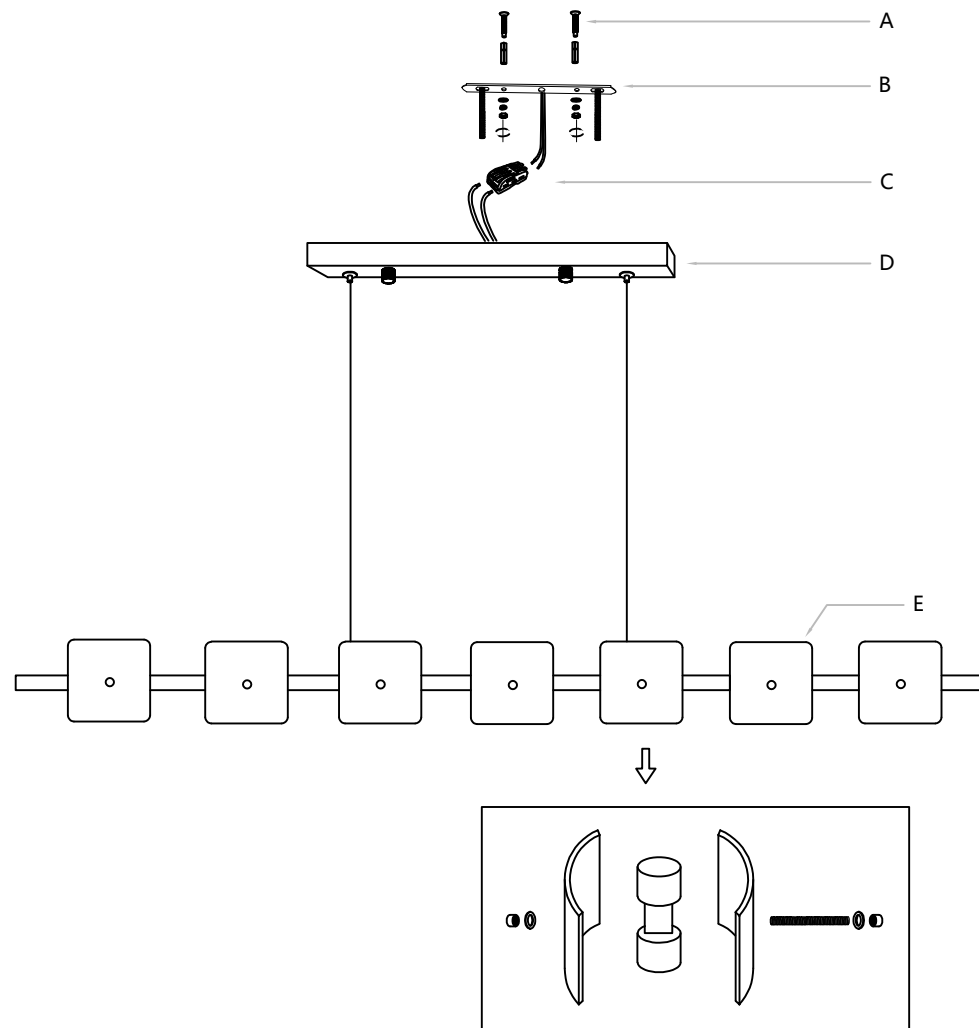

Fix the screw (A) to the ceiling using an iron nail, then fix the mounting plate (B) to the ceiling. Next, connect the wires on the top cover (D) to the terminal blocks (C) on the ceiling. Finally, fix the top cover (D) to the mounting plate (B), and then install the glass sheet (E) onto the lamp frame.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

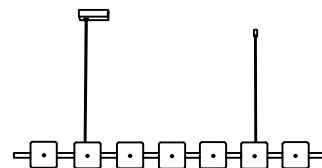


Product style diagram


Steps of installation

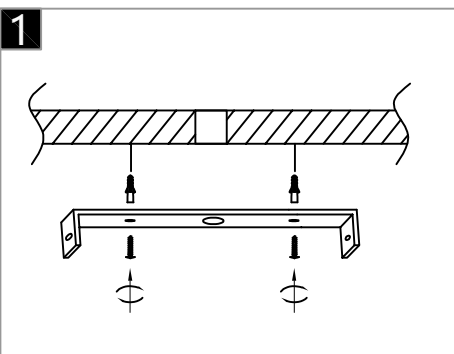


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

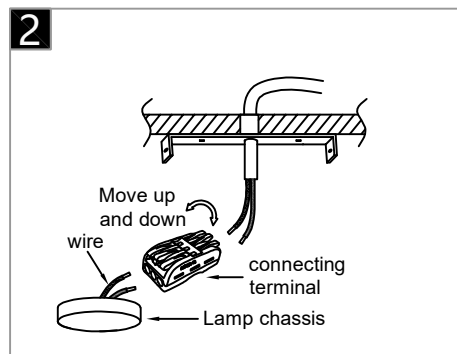


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

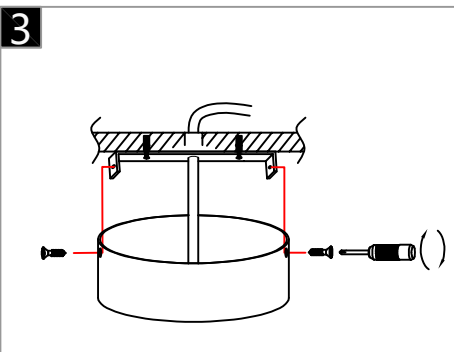

Align the holes on the top cover with the holes on the mounting plate, and then secure them with screws.

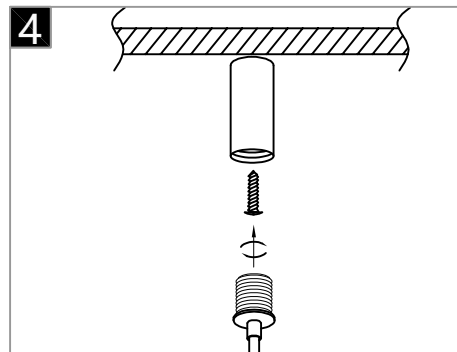

Place the iron pin at the desired Angle, then attach it to the ceiling with self-tapping screws, and then fasten it with locking wire Screw it on the iron pin.

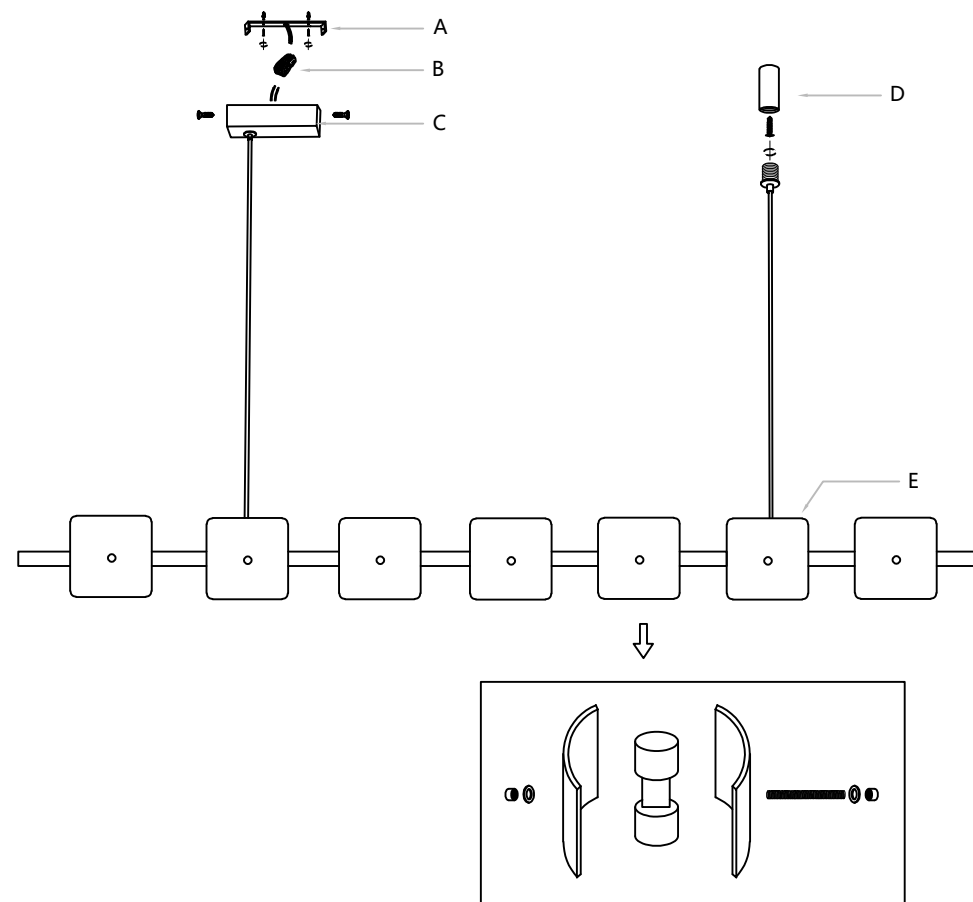

Place the iron nail (D) in the desired inclined position, then fix it to the ceiling using a self-tapping screw, and then secure it with a locking line. Tighten the screw onto the iron nail (D). Fix the mounting plate (A) to the ceiling. Then, pass the reserved wires through the decorative ring (E) and install them onto the top cover (C), then connect the reserved wires to the terminal block (B), and align the top cover holes with the mounting plate (A), and then secure it with screws, Finally, install the glass plate (E) onto the lamp stand.